

F

F

E

E

D

D

C

C

B

B

A

A

10

9

8

7

6

5



4

3

2

1

FINISHED LENGTH (SEE TABLE)

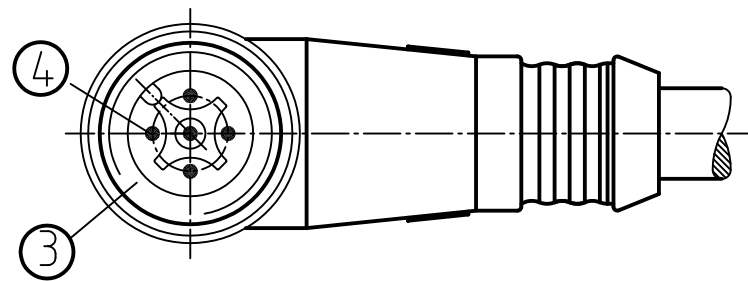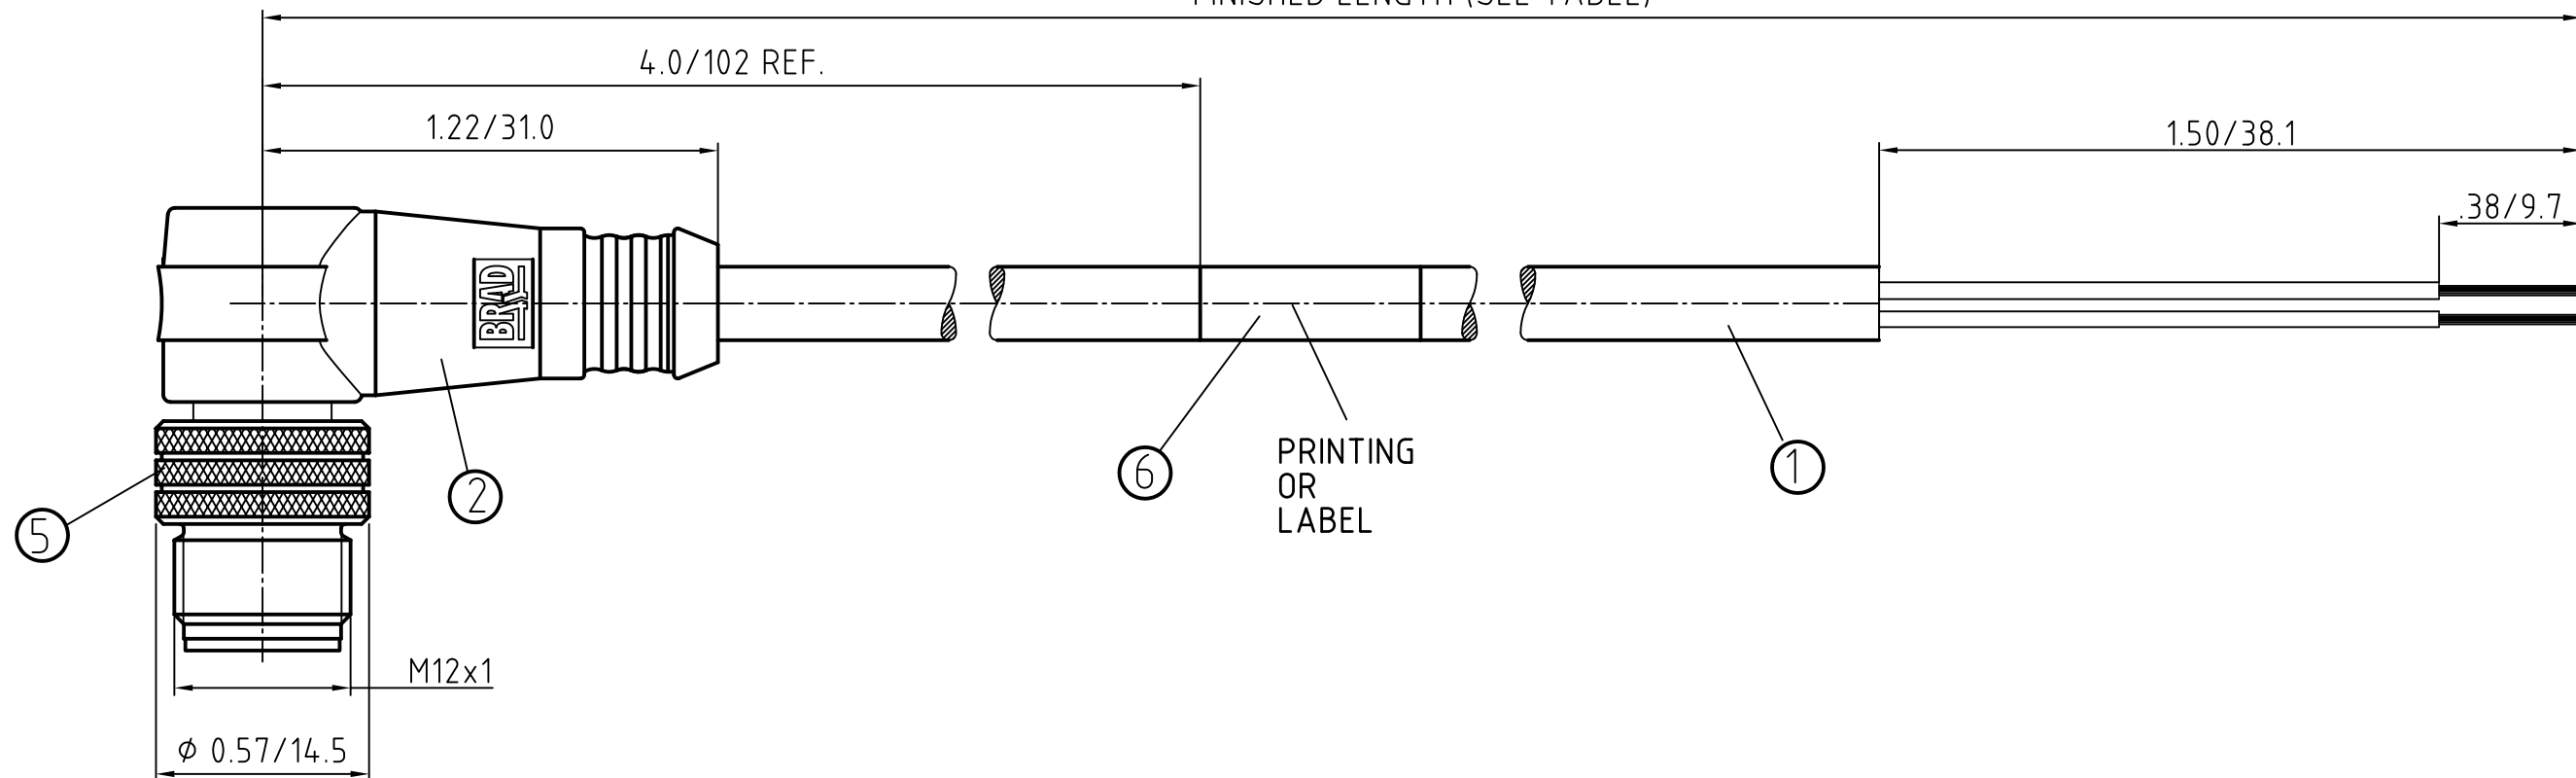

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837




ITEM	COMPONENT	MATERIAL	FINISH
6	LABLE	MYLAR	BLACK/YELLOW
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	TPE	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	INSUL: PVC JACKET: TPE	YELLOW

MALE FACE VIEW

3-POLE


4-POLE

5-POLE



WIRING DIAGRAM

1 BROWN
3 BLUE
4 BLACK1 BROWN
2 WHITE
3 BLUE
4 BLACK1 BROWN
2 WHITE
3 BLUE
4 BLACK
5 GREY

DESCRIPTION EC NO: WEU2010-0278 DRWN: LSTEMMLE 2010/01/18 CHKD: NS APPR: NSTAUDIG 2010/01/26		QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION			
			 = 0  = 0		mm	INCH	DRAWN BY _____ DATE _____		MICRO-CHANGE CORDSET 3/4/5-POL. MALE 90 SE 22/3-5 TPE YELLOW CABLE				
				4 PLACES	±---	±---	CHECKED BY _____ DATE _____						
				3 PLACES	±---	±---	RE _____ 2010/01/21						
				2 PLACES	±---	±.01	APPROVED BY _____ DATE _____						
1	REV		1 PLACE	±0.3	±---	NSTAUDIG 2010/01/25			MOLEX INCORPORATED				
		ANGULAR ± --- °			MATERIAL NO.		DOCUMENT NO.				SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE SHEET 2		SD-120065-037				1 OF 1		
					SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

10

9

8

7

6

5

4

3

2

1

10

9

8

7

6

5

4

3

2

1

F

E

D

C

B

A

F

E

D

C

B

A

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200651501	803007K05M020	6.56' +3.5" -0 [2.0M +89 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200651691	804007K05M020	6.56' +3.5" -0 [2.0M +89 -0]
4	1200651692	804007K05M040	13.12' +6.5" -0 [4.0M +165 -0]
4	1200651693	804007K05M050	16.40' +6.5" -0 [5.0M +165 -0]
4	1200651694	804007K05M060	19.69' +6.5" -0 [6.0M +165 -0]
4	1200651695	804007K05M100	32.81' +12.5" -0 [10.0M +318 -0]

DESCRIPTION EC NO: WEU2010-0278 DRWN: LSTEMMLE 2010/01/18 CHKD: NS APPR: NSTAUDIG 2010/01/26		DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1		DESIGN UNITS METRIC		 THIRD ANGLE PROJECTION		
				 = 0  = 0			mm	INCH	DRAWN BY _____ DATE _____ -----		MICRO-CHANGE CORDSET 3/4/5-POL. MALE 90 SE 22/3-5 TPE YELLOW CABLE					
						4 PLACES	±---	±---	CHECKED BY _____ DATE _____ RE 2010/01/21							
						3 PLACES	±---	±---	APPROVED BY _____ DATE _____ NSTAUDIG 2010/01/25							
						2 PLACES	±---	±.01	MATERIAL NO. _____ SEE TABLE		DOCUMENT NO. SD-120065-037				SHEET NO. 1 OF 1	
1		REV		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ± --- °		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						