

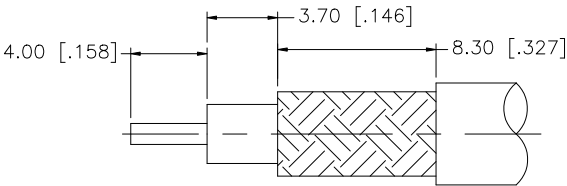
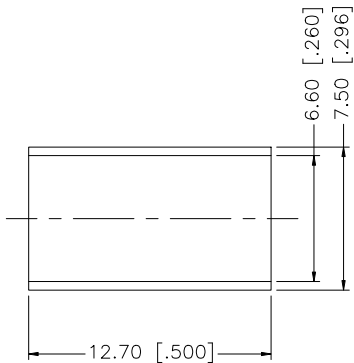


REV.	DATE	ECR NO.	DESCRIPTION
NC	07/31/05	—	INITIAL RELEASE
A	03/05/09	—	ADD "75Ohms" TO PART DESCRIPTION

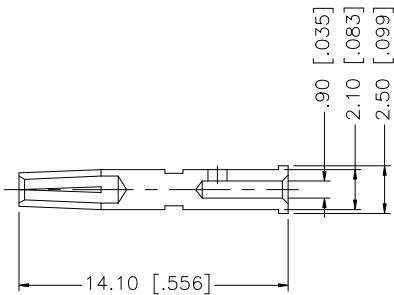

RECOMMENDED
CABLE STRIPPING DIM'S

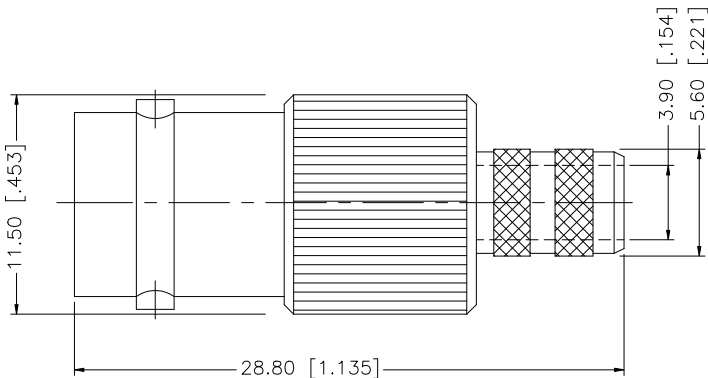

- NOTES:
1. CRIMPED FERRULE HEX CRIMP SIZE .255" [6.48]
 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	GRS	03/05/09						
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED				PART DESCRIPTION BNC CRIMP JACK, 75 Ohms				
6						ISSUED								
5					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1				PART NO. 112649			
4	FERRULE	COPPER	NICKEL	1										
3	CONTACT PIN	PHOS. BRONZE	GOLD	1						DWG. NO. 112649.DWG				
2	INSULATOR	PTFE	NATURAL	1										
1	HOUSING/BODY	BRASS	NICKEL	1						REV. A	SIZE A	SCALE NA		
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		CAD FILE		C:/112/112649.DWG					