
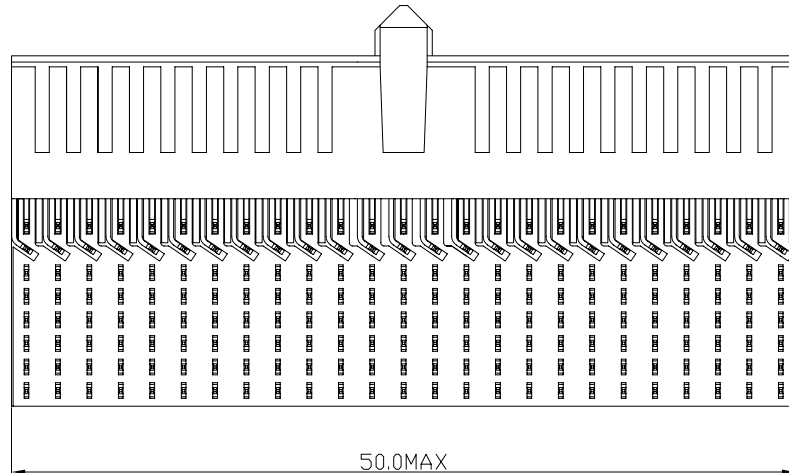
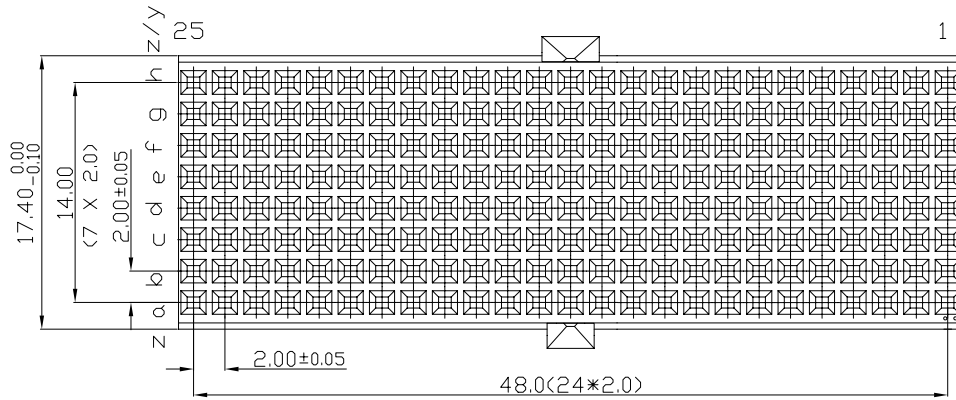


rev	ecn no	dr	date
A	CONVERSION REVISION 01	KN	14-09-01
B	DG05-0278	Kason	05-08-05
C	DG07-0362	Kason	05-09-07

FCI		www.fciconnect.com		✓		tolerance 1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1° HOEKEN		projection 			
Dr	M.FRET	11-07-00	Product family		MILLIPICS		size	A4	Scale 3/1		
Eng			Spec ref								
Chr			Material				ECN				
Appr											
title					dwg no		BS,C ,202258,010			Rev. C	
MPACS 8+2R RA RCP CONN TYPE DE/UPPER SHIELDED											
catalog no					HM2R95PA8100----		CUMSTOMER			sheet 1 of 1	

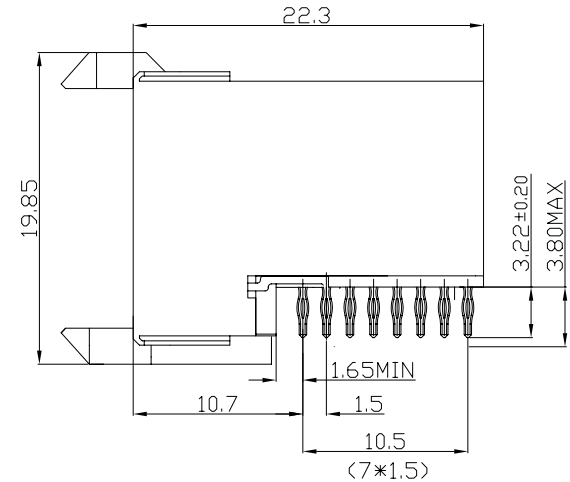

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE : 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE : 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN/CONT
INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES 1. LEAD FREE INDICATOR -LF=LEAD FREE
PERFORMANCE LEVEL INDICATOR
(REF DWG NO.BSC 201844.003)
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
BS.A201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008