

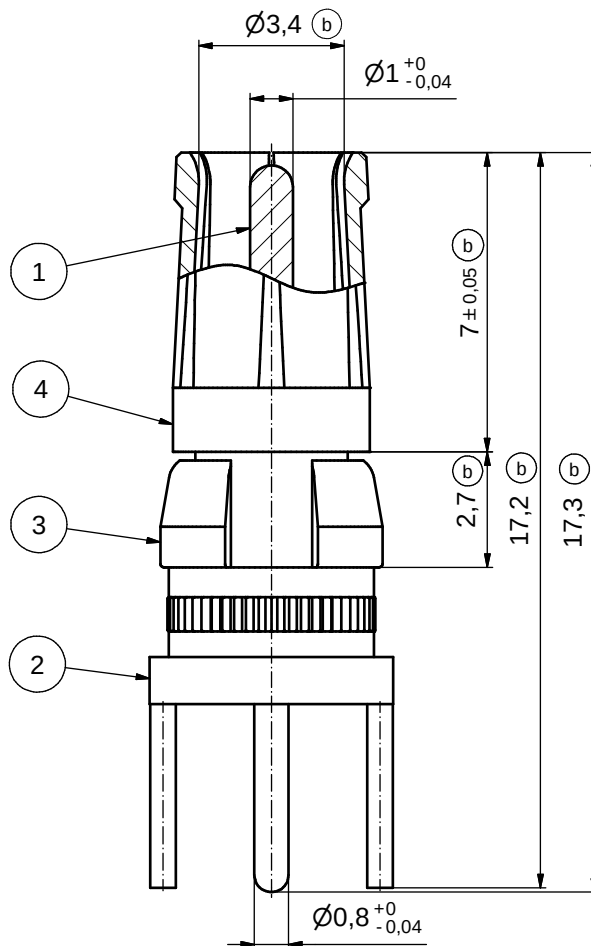
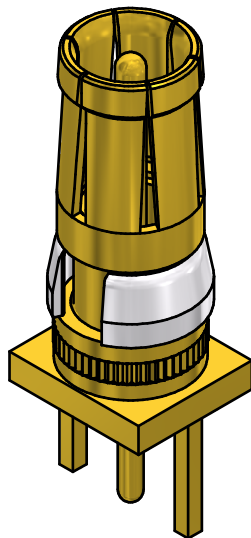


Part no.	Finish Pos.1	Finish Pos.2	Finish Pos.3	Finish Pos.4
132A24019X	GOLD FLASH over NICKEL	GOLD FLASH over NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL
132J24019X	min. 50µin HARD GOLD over min. 50µin NICKEL	GOLD FLASH over NICKEL	NICKEL PLATED	min. 30µin HARD GOLD over min. 50µin NICKEL

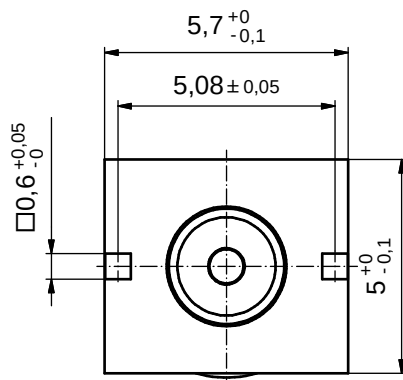

MOUNTING HOLES

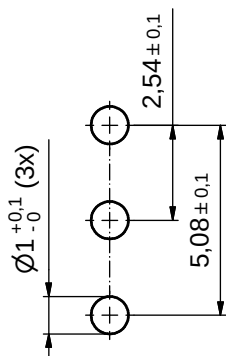

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH					tolerance		 dim. in mm	scale: 8:1		
								material: COPPER ALLOY (Pos. 1 - 4) (b)		
					date	name	title: COAXIAL CONTACT SOCKET 50 OHM Straight PCB termination, (76) with 3 Pins for D-SUB COMBINATION			
					drawn	08.12.06				Schwenkler
					appd.	08.12.06				Lehmenkühler
					norm					
					d-old			dwg no:		DIN-A3 sh: 1
	7 x b	Ä5188	30.04.14	HS						
	a	Original								
	rev.	description	date	name				part no:		see table (b)