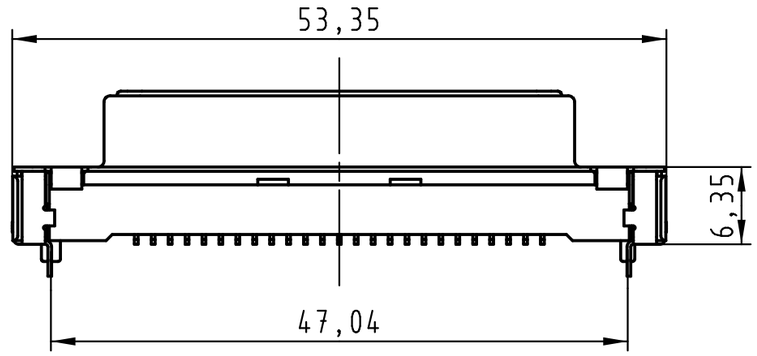

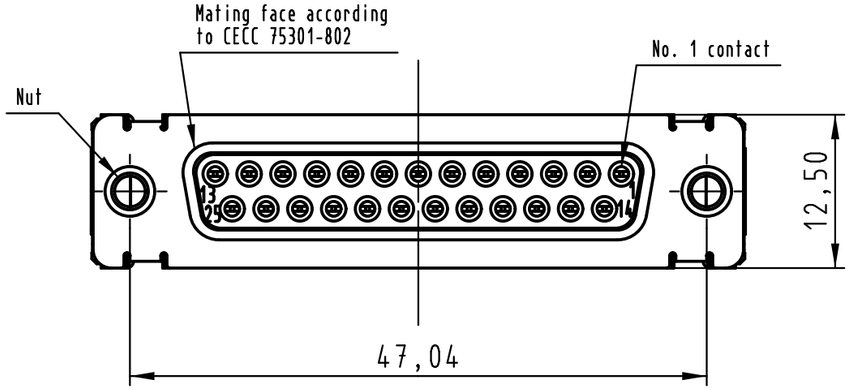

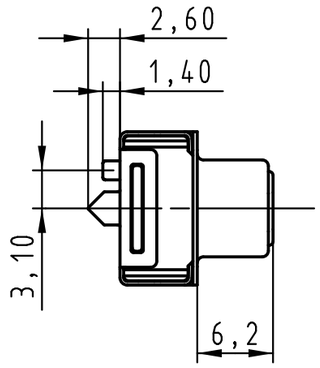

Load vacuum cover

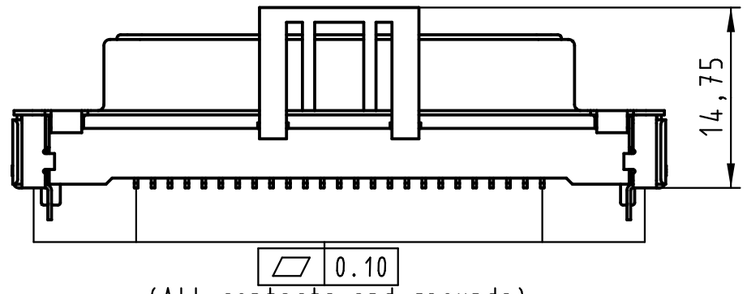

(All contacts and grounds)

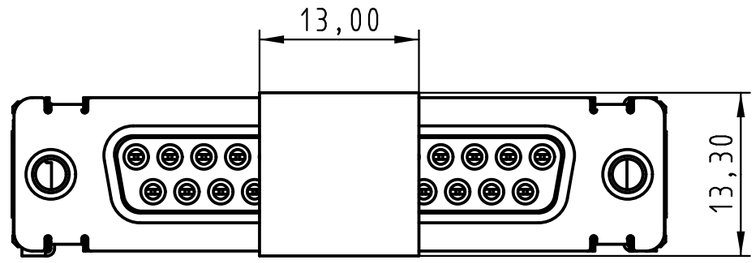

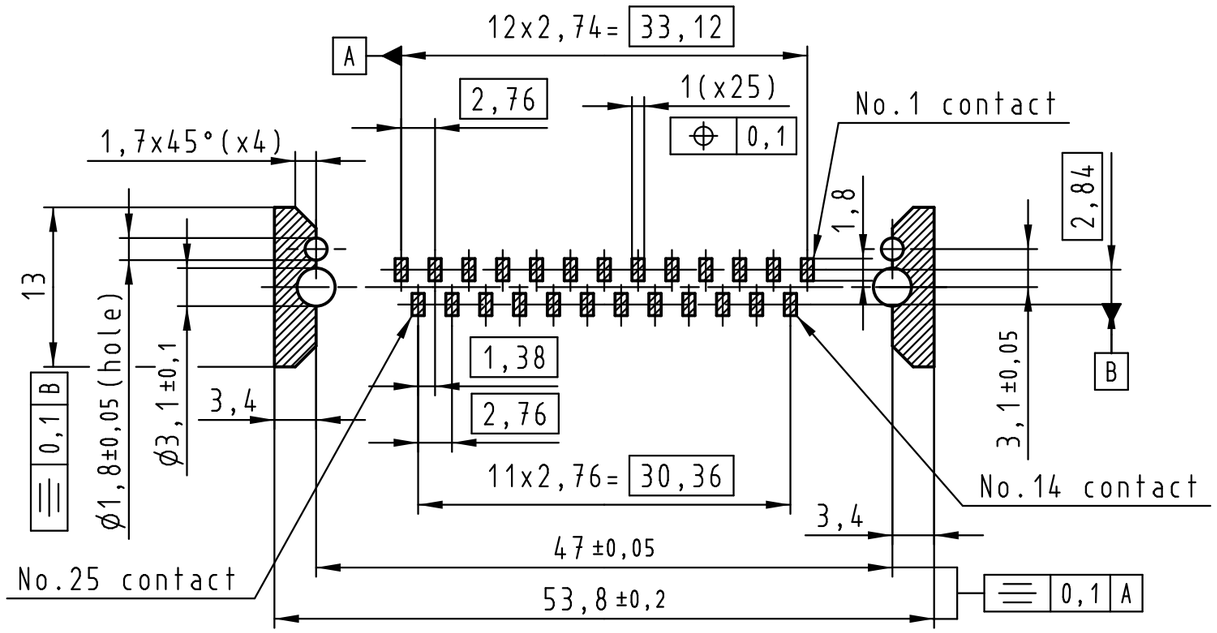

PCB layout, component side

Max. Temperature: 260° during 10 seconds.

Part number	PL	Nut	Index designation
0955 355 3611 741	1	M3	Black insulator
0955 355 3612 741	1	4-40 UNC	
0955 355 6611 741	2	M3	
0955 355 6612 741	2	4-40 UNC	
0955 355 7611 741	3	M3	
0955 355 7612 741	3	4-40 UNC	

Reel Packaging:
140 connectors
(See details on page2/2)

All Dimensions in mm
Original Size DIN A 3

Techn. Character.

Free size tolerances

	Dat.	Name	Scale
Detail.	25-Oct-11	Johnson.S	2 : 1
Insp.	17-Nov-11	Steven.W	
Stand.	17-Nov-11	Steven.W	

D-Sub SMT, 25 poles
Female, Straight
with nuts and ground pins

Mod.	Dat.	Name
EC04070	17-Nov-11	Johnson.S

Zhuhai HARTING Limited

TB 09 55 355 x61x

Sub.

All rights reserved

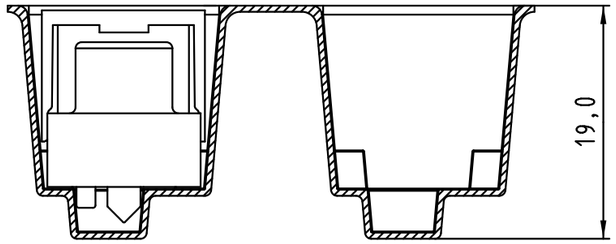

Detail A

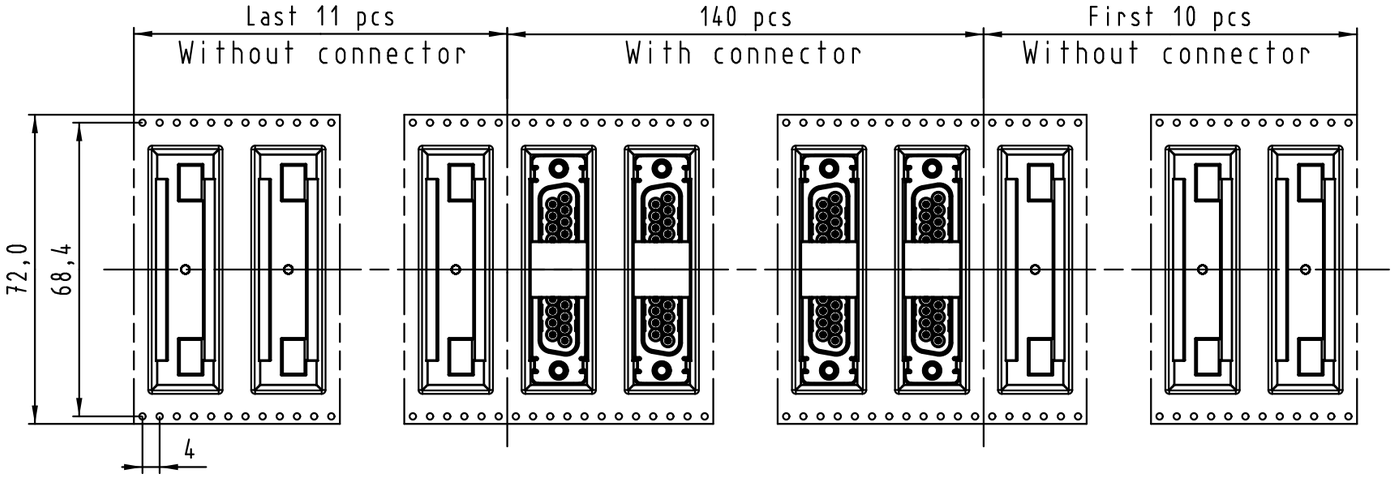

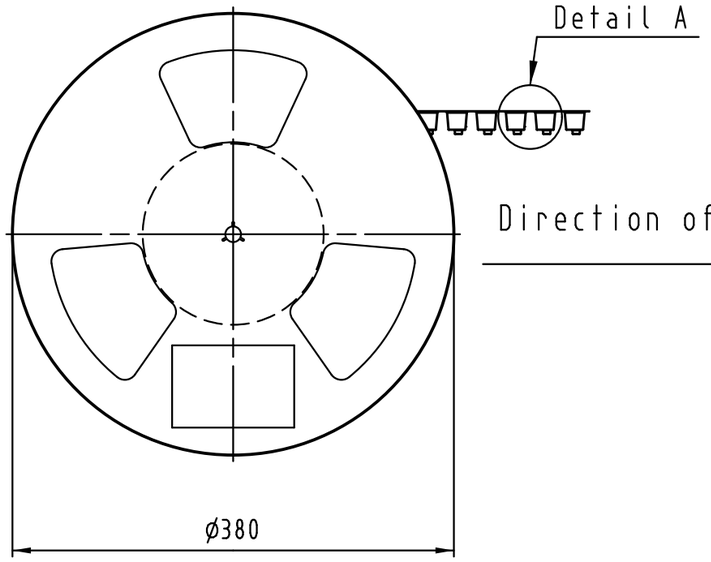

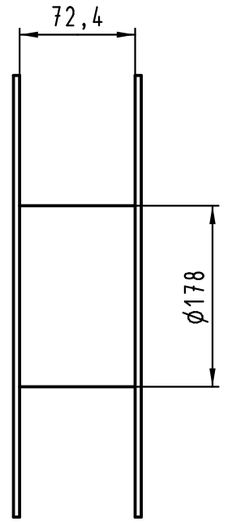

See TB 09 55 355 x61x folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2.

Part number	PL	Nut	Index designation	
0955 355 3611 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 355 3612 741	1	4-40 UNC		
0955 355 6611 741	2	M3		
0955 355 6612 741	2	4-40 UNC		
0955 355 7611 741	3	M3		
0955 355 7612 741	3	4-40 UNC		

All Dimensions in mm Original Size DIN A 3			Techn. Character.				Free size tolerances
				Dat.	Name	Scale	D-Sub SMT, 25 poles Female, Straight with nuts and ground pins
			Detail.	25-Oct-11	Johnson.S		
			Insp.	17-Nov-11	Steven.W		
			Stand.	17-Nov-11	Steven.W		
EC04070	17-Nov-11	Johnson.S	Zhuhai HARTING Limited			TB 09 55 355 x61x	Page 2/2
Mod.	Dat.	Name				Sub.	

All rights reserved