

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20







© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	23JUN2015	DL	CW

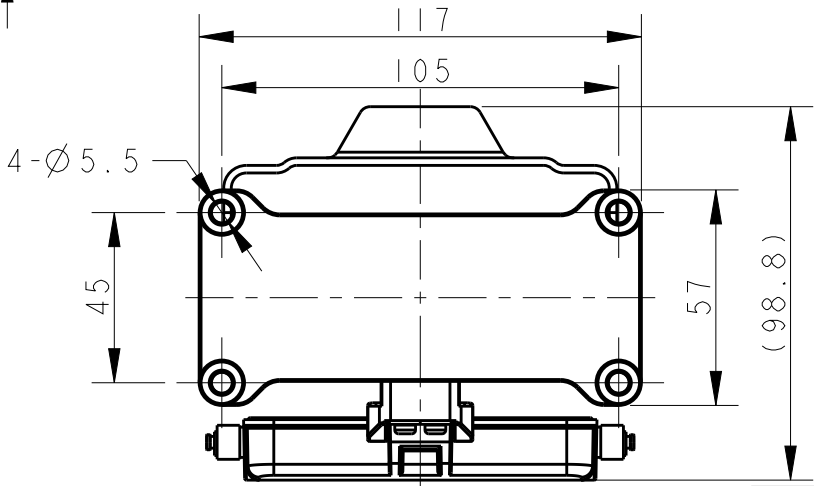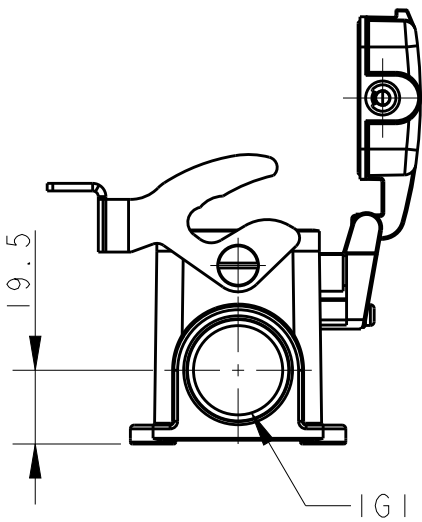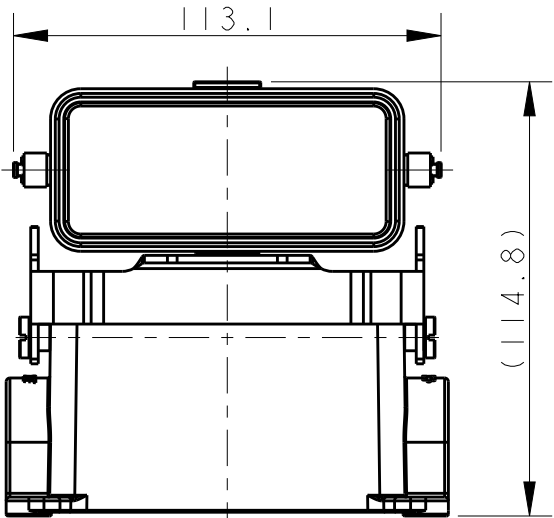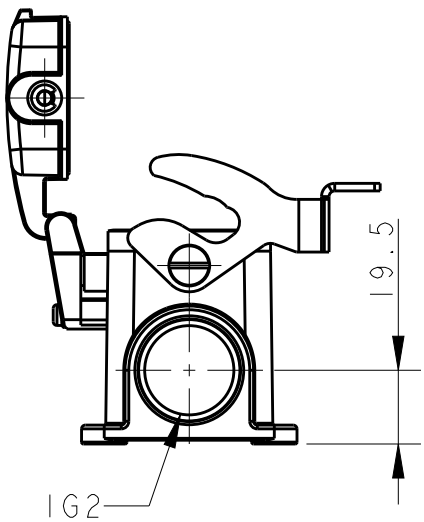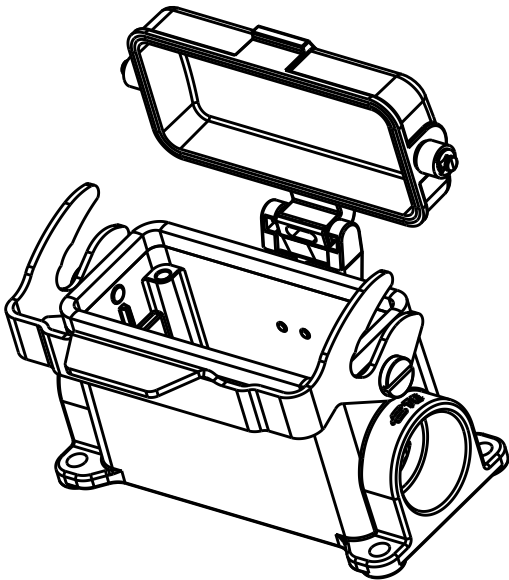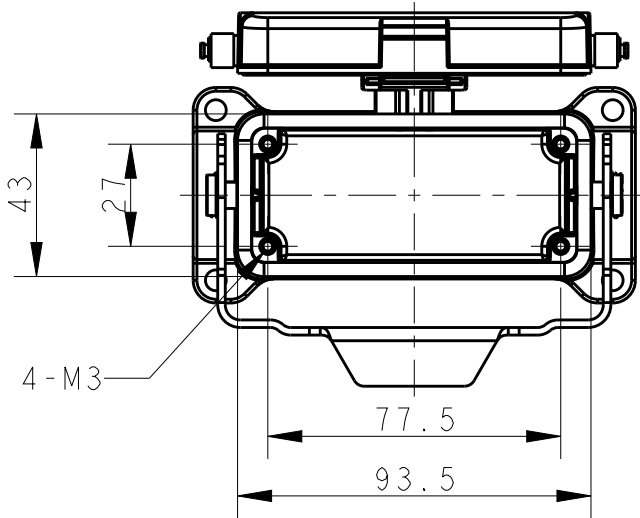

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

TI620163421-000	TYPE I	HI6B-SDRM-LB-PG2I	PG2I	-
TI620163425-000		HI6B-SDRM-LB-M25	M25	-
TI620163321-000		HI6B-SDRM-LB-2PG2I	PG2I	PG2I
TI620163325-000		HI6B-SDRM-LB-2M25	M25	M25
ASSEMBLY PART NUMBER	TYPE	ASSEMBLY PART DESCRIPTION	IG1	IG2



TYPE I: BODY + STEEL LOCKING + METAL PROTECTION COVER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 23JUN2015	TE Connectivity	
		CHK CHRIS WANG 23JUN2015		
		APVD XU XIANG 23JUN2015		
		PRODUCT SPEC 108-137013		
		APPLICATION SPEC 114-137013	NAME HI6B-SDRM-LB-PG/M	
		WEIGHT -		
CUSTOMER DRAWING		SCALE 1:2	SHEET 1 OF 2	REV A




DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 PLC ±-	
		1 PLC ±-	
		2 PLC ±-	
		3 PLC ±-	
		4 PLC ±-	
		ANGLES ±-	
MATERIAL TBD		FINISH -	
		-	

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

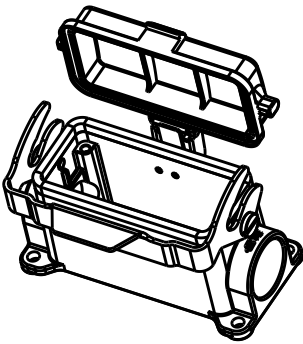
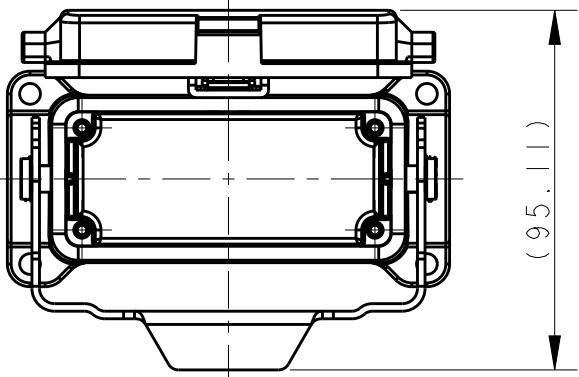


SCALE 3:10

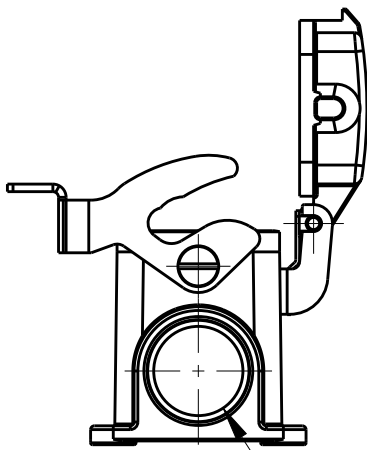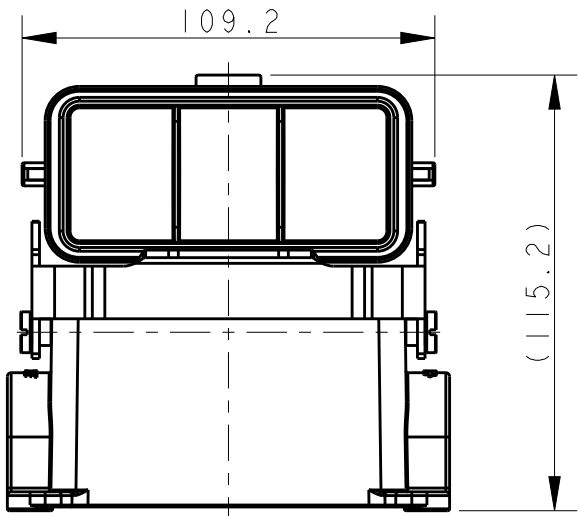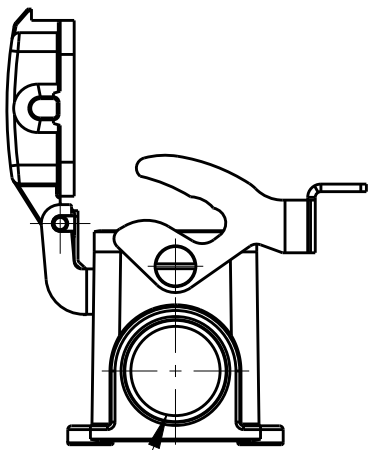


TYPE 2: BODY + STEEL LOCKING + PLASTIC PROTECTION COVER



OTHER SPEC REFER TO TYPE 1

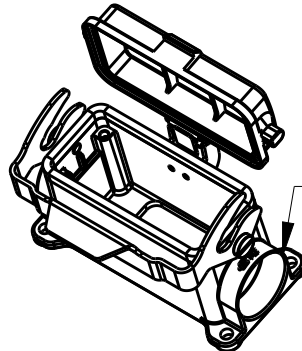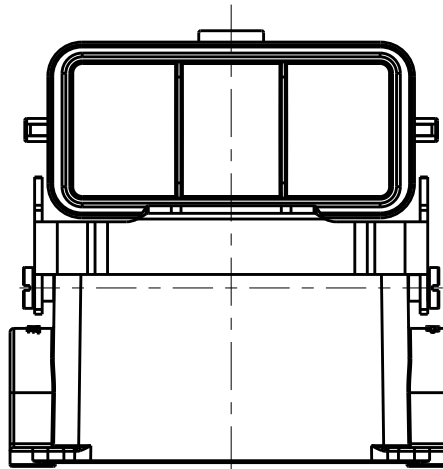

SCALE 3:10

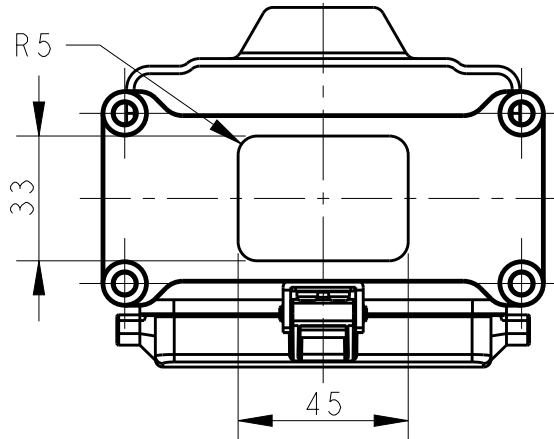

TYPE 4: BODY + STEEL LOCKING + PLASTIC PROTECTION COVER
BOTTOM CUT OUT
OTHER SPEC REFER TO TYPE 2

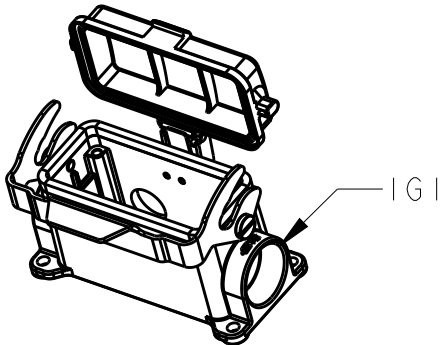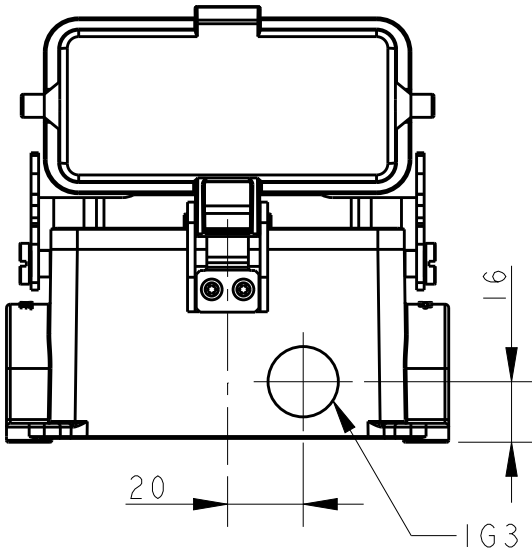

SCALE 3:10

TYPE 3: BODY + STEEL LOCKING + PLASTIC PROTECTION COVER
1 SIDE ENTRY + 1 FRONT ENTRY
OTHER SPEC REFER TO TYPE 2

TI620163121-000	TYPE 2	HI6B-SDR-LB-PG2I	PG2I	-	-
TI620163125-000		HI6B-SDR-LB-M25	M25	-	-
TI620163132-000		HI6B-SDR-LB-M32	M32	-	-
TI620163221-000		HI6B-SDR-LB-2PG2I	PG2I	PG2I	-
TI620163225-000		HI6B-SDR-LB-2M25	M25	M25	-
TI620162111-000	TYPE 3	HI6B-SDR-LB-PG11/PG2I	PG2I	-	PG11
TI620163132-100	TYPE 4	HI6B-SDR-LB-M32/T	M32	-	-
ASSEMBLY PART NUMBER	TYPE	ASSEMBLY PART DESCRIPTION	IG1	IG2	IG3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 23JUN2015	TE Connectivity		
DIMENSIONS: mm		CHK CHRIS WANG 23JUN2015			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD XU XIANG 23JUN2015			
0 PLC ±-		PRODUCT SPEC 108-137013			
1 PLC ±-		APPLICATION SPEC 114-137013	NAME HI6B-SDR-LB-PG/M		
2 PLC ±-		WEIGHT -	SIZE A3	CAGE CODE -	DRAWING NO C-TI62016XXXXX00
3 PLC ±-		CUSTOMER DRAWING	SCALE 1:2	SHEET 2 OF 2	REV A
4 PLC ±-					
ANGLES ±-					
FINISH -					
MATERIAL TBD					