


PCB terminal block - ZFKDSA 1-3,81-23 MIXC-GN - 1711428

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




PCB terminal block, nominal current: 12 A, nom. voltage: 200 V, pitch: 3.81 mm, number of positions: 23, connection method: Spring-cage connection, mounting: Wave soldering, color: multi-color. The article can be aligned to create different nos. of positions!

The figure shows the 8-position version

Your advantages

- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Clamping space opened by means of fixed screwdriver enables convenient conductor connection
- ✓ Angled connection enables multi-row arrangement on the PCB
- ✓ The latching on the side enables various numbers of positions to be combined
- ✓ Two solder pins reduce the mechanical strain on the soldering spots

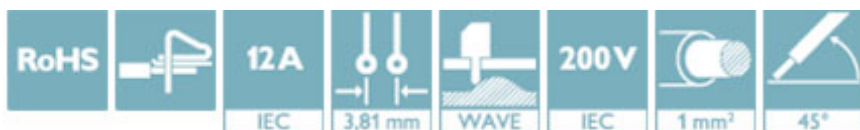

Key Commercial Data

Packing unit	50 pc
GTIN	 4 055626 245508
GTIN	4055626245508

Technical data

Dimensions

Length [l]	16.9 mm
Pitch	3.81 mm
Height	15 mm
Solder pin [P]	3.5 mm
Hole diameter	1.2 mm

General

Range of articles	ZFKDS(A) 1
Insulating material group	I
Rated voltage (III/2)	200 V
Nominal current I_N	12 A

PCB terminal block - ZFKDSA 1-3,81-23 MIXC-GN - 1711428

Technical data

General

Nominal cross section	1 mm ²
Flammability rating according to UL 94	V0
Number of positions	23

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>