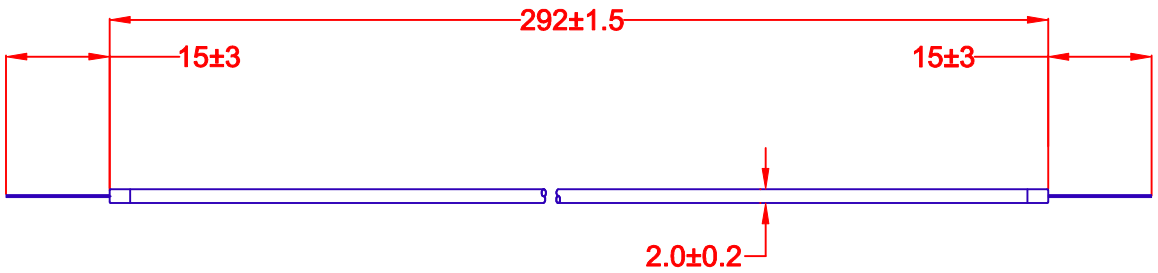


| JKL LAMP PART NUMBER | COLOR | STARTING CIRCUIT VOLTAGE VS (Vrms) | OPERATING LAMP VOLTAGE VL (Vrms) | OPERATING LAMP CURRENT IL (mArms) | BRIGHTNESS (CANDELA/m2) | *RATED LIFE (HRS) |
|---|---|---|---|---|---|---|
| BF20292-24B | LCD HIGH OUTPUT WHITE 8400°k RGB | 1820 @ 0°C | 810 | 5 | 38,000 ± 10% | 20,000 |

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OFTHE INITIAL RATING.

| REV. NO. | DESCRIPTION/ECO NUMBER | APPV'D DATE |
|---|---|---|
| A | DIMENSION CHANGES | 12/19/02 |
| | RELEASED | 2/28/02 |

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- 0.2
2 PL +/- 0
ANGLE +/- 0

DRAWN BY L. WENGSTROM
APPV'D BY F.D. DATE 12/19/02

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

JKL COMPONENTS CORPORATION

TITLE
MINIATURE COLD CATHODE FLUORESCENT LAMP

SIZE A
FSCM NO. 55335
DRAWING NO. BF20292-24B
SCALE NONE
RELEASED DATE 2/28/02
REVISION DATE 12/19/02
REV. NO. A
SHEET 1 OF 1