

5




4

3


2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

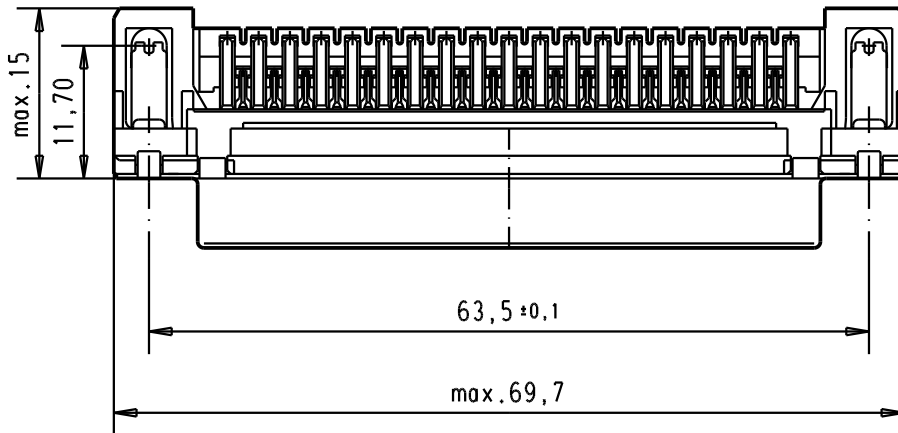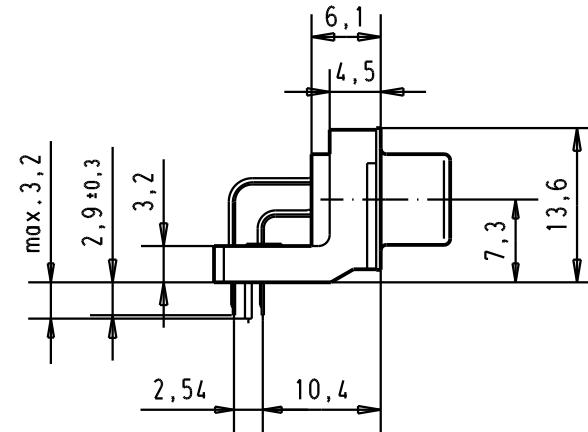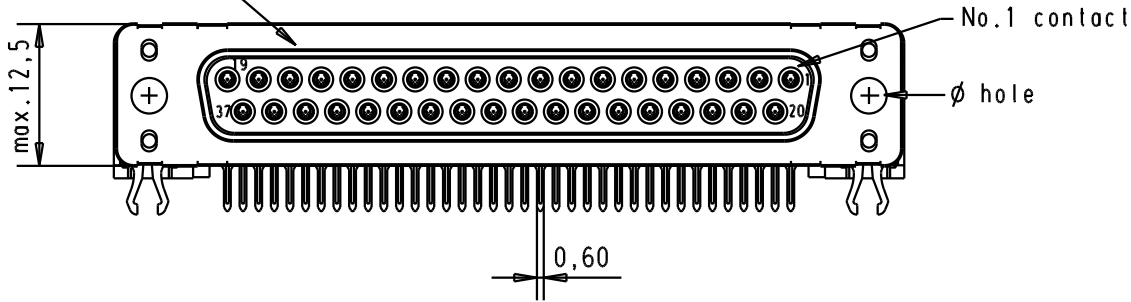


PCB layout hole
component side

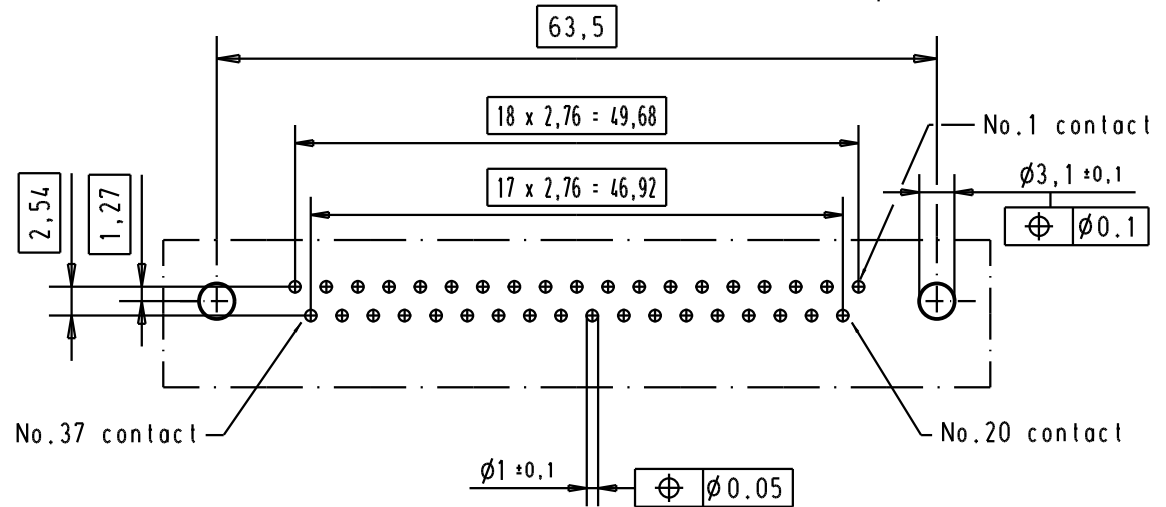

Connector retention and insertion forces on the PCB = 25 / 80 newtons

A

							Dat.	Name			
							Detail.	06/dec/00	ALSPACE		
							Insp.				
							Stand.				
09 66 452 3610	3.1 ± 0.1	1	31892	05/05/04	JH						
09 66 452 6610	3.1 ± 0.1	2	31084	04/SEP/02	YT						
09 66 452 7610	3.1 ± 0.1	3	27960	06/dec/00	ALSPACE						
Part number	Ø hole	Performance level	Mod.	Dat.	Name						



All Dim. in mm
Orig. Size DIN A 4

D-Sub 37 poles standard angle
female, solder pin with hole and
grounding board lock.

Maßstab/
Scale

1.5:1

HARTING EURL
F-95972 Paris



TB 0966452x61x

Blatt/ Page

4

Sub.