

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [46436-3008](#)
Status: **Active**
Overview: EXTreme Ten60Power™ High-Current Connector
Description: 2.54mm, 5.50mm Pitch EXTreme Ten60Power™ Right Angle Receptacle with Top Guide Receivers, 24 Signal Circuits, 6 Power Circuits

Documents:

[3D Model](#) [Application Specification AS-46436-100 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-46436-100 \(PDF\)](#)

Agency Certification


CSA LR19980
TUV R72081037

General

Product Family PCB Receptacles
Series [46436](#)
Application Board-to-Board, Power, Signal
Comments See PS-46436-100 for details
Overview [EXTreme Ten60Power™ High-Current Connector](#)
Product Name EXTreme Ten60Power™
UPC 883906918866

Physical

(p)ower-(s)ignal Configuration 6p - 24s
Circuits (Loaded) 30
Circuits (maximum) 30
Color - Resin Black
Durability (mating cycles max) 200
Flammability 94V-0
Glow-Wire Compliant No
Guide to Mating Part Yes
Keying to Mating Part None
Lock to Mating Part No
Material - Metal Copper
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 20.000/g
Number of Rows 1
Orientation Right Angle
PCB Locator No
PCB Retention None
PCB Thickness - Recommended 1.58mm
Packaging Type Tray
Pitch - Mating Interface 2.54mm, 5.50mm
Plating min - Mating 0.127µm
Plating min - Termination 2.540µm
Polarized to Mating Part Yes
Polarized to PCB Yes
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating -40°C to +105°C
Termination Interface: Style Through Hole

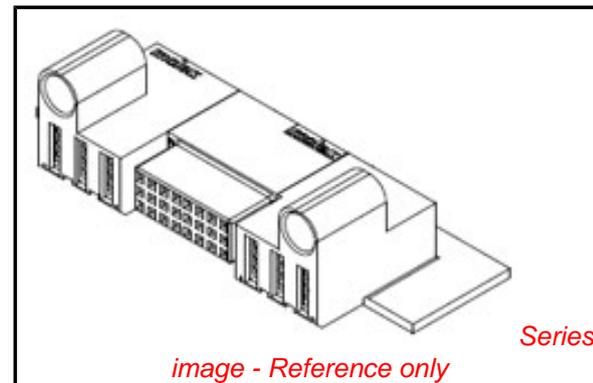

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[46436Series](#)

Mates With

[46437-3008 EXTreme Ten60Power™ Right Angle Plug Assembly](#)

Electrical

Current - Maximum per Contact	2.5A, 55A
Grounding to PCB	No
Voltage - Maximum	600V AC / 250V DC

Material Info**Reference - Drawing Numbers**

Application Specification	AS-46436-100
Product Specification	PS-46436-100
Sales Drawing	SD-46436-308

This document was generated on 06/04/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION