

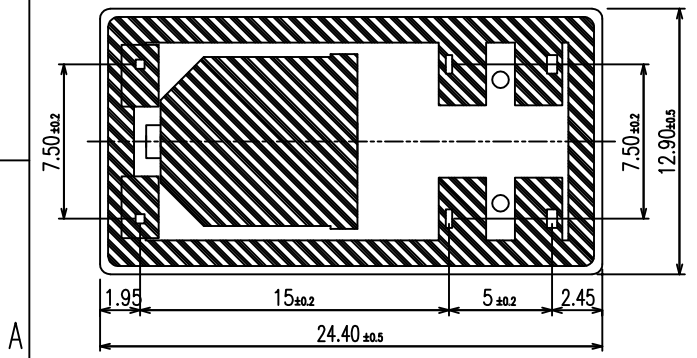



2				1			
LOC	DIST	REVISIONS					
HB		P	LTR	DESCRIPTION	DATE	DWN	APVD
			E 1	REVISED PER ECO-11-005140	29MAR11	RK	HMR
			G	1.CHANGE TE LOGO 2. ADD LINE IDENTIFICATIONS.TERMINALS TOLERANCE CLARIFICATION ECO-12-005305	28MAR12	YS.H	BH.Y

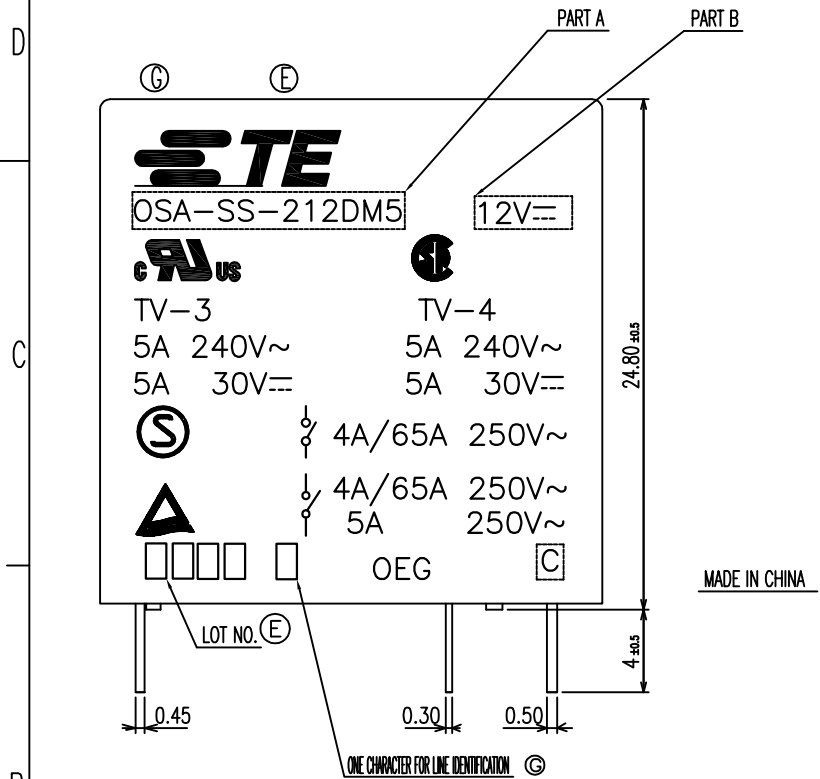


MADE IN CHINA

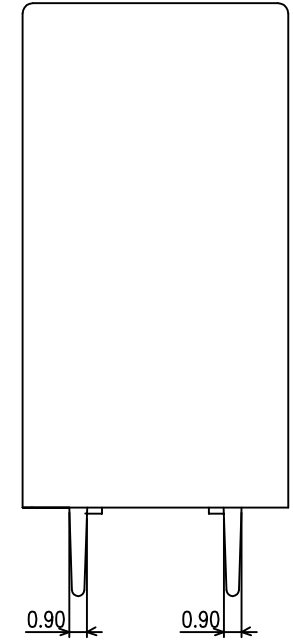


CONNECTION DIAGRAM?BOTTM VIEW?



DRILLING DIAGRAM?BOTTM VIEW?



TOLERANCE	
Diagram dimension	Tolerance
max. 1mm	±0.1mm
1 - 3mm	±0.2mm
min. 3mm	±0.3mm

DIMENSIONS: mm		TO FRANCES UNLESS OTHERWISE SPECIFIED: 0 PLC + 1 PLC + 2 PLC + 3 PLC + 4 PLC + ANGLES +	DWN H.SASAKI	 TE Connectivity			
			CHK Y.OIKAWA				
			APVD A.NAGAI	NAME OSA-SS-DM5,000 ,000M			
			PRODUCT SPEC -				
			APPLICATION SPEC -				
MATERIAL -	FINISH -	WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO G= 5-1419124-7	RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 4:1	SHEET 1	OF 2	REV G

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC
HB

DIST

REVISIONS

P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD

9-1440001-1	OSA-SS-224DM5	24VDC	OSA-SS-224DM5	o
9-1440001-0	OSA-SS-218DM5	18VDC	OSA-SS-218DM5	n
8-1440001-9	OSA-SS-212DM5	12VDC	OSA-SS-212DM5	m
8-1440001-8	OSA-SS-212DM5	12VDC	OSA-SS-212DM5	l
8-1440001-7	OSA-SS-209DM5	9VDC	OSA-SS-209DM5	k
8-1440001-6	OSA-SS-206DM5	6VDC	OSA-SS-206DM5	j
8-1440001-5	OSA-SS-205DM5	5VDC	OSA-SS-205DM5	i
1461388-9	OSA-SS-248DM5	48VDC	OSA-SS-248DM5	h
6-1419124-1	OSA-SS-224DM5	24VDC	OSA-SS-224DM5	g
3-1419145-6	OSA-SS-218DM5	18VDC	OSA-SS-218DM5	f
3-1419145-5	OSA-SS-212DM5	12VDC	OSA-SS-212DM5	e
5-1419124-7	OSA-SS-212DM5	12VDC	OSA-SS-212DM5	d
3-1419145-4	OSA-SS-209DM5	9VDC	OSA-SS-209DM5	c
5-1419124-5	OSA-SS-206DM5	6VDC	OSA-SS-206DM5	b
5-1419124-3	OSA-SS-205DM5	5VDC	OSA-SS-205DM5	a
TE CONNECTIVITY PART NUMBER	DESCRIPTION	PART B	PART A	ITEM

Ⓔ NOTES:

1.LOT NO. SYSTEM AS FOLLOWING:

0813

WEEK

YEAR

Ⓒ 2.TERMINAL DIMENSIONS BEFORE SOLDER DIP

Ⓒ 3.FOR THE TIN-PLATING OF THE PINS:

+0.1mm FOR WIDTH, THICKNESS AND DIAMETER

+0.5mm FOR LENGTH

RELAY TYPE

		EPOXY RESIN	SEAL	14
94V-0		PBT	CASE	13
94V-0		PA66	CARD	12
		Ag ALLOY	STATIONARY CONTACT	11
		Cu ALLOY	STATIONARY TERMINAL	10
		Ag ALLOY	MOVABLE CONTACT	9
		Cu ALLOY	MOVABLE SPRING	8
	Cu-Ni PLATED	STEEL	ARMATURE	7
	Cu-Ni PLATED	STEEL	CORE	6
		PBS	HINGE SPRING	5
	Ni PLATED	STEEL	YOKE	4
		UEW	MAGNETIC WIRE	3
		CP WIRE	COIL TERMINAL	2
94V-0		PBT	BOBBIN	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM



TE Connectivity

NAME	OSA-SS-DM5,000 ,000M			RESTRICTED TO
SIZE	CAGE CODE	DRAWING NO		
A3	00779	5-1419124-7		
CUSTOMER DRAWING	SCALE	SHEET	2 OF 2	REV G

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± 4 PLG ±	CHK
MATERIAL	FINISH	APVD
-	± ±	PRODUCT SPEC
		APPLICATION SPEC
		WEIGHT
		CUSTOMER DRAWING