
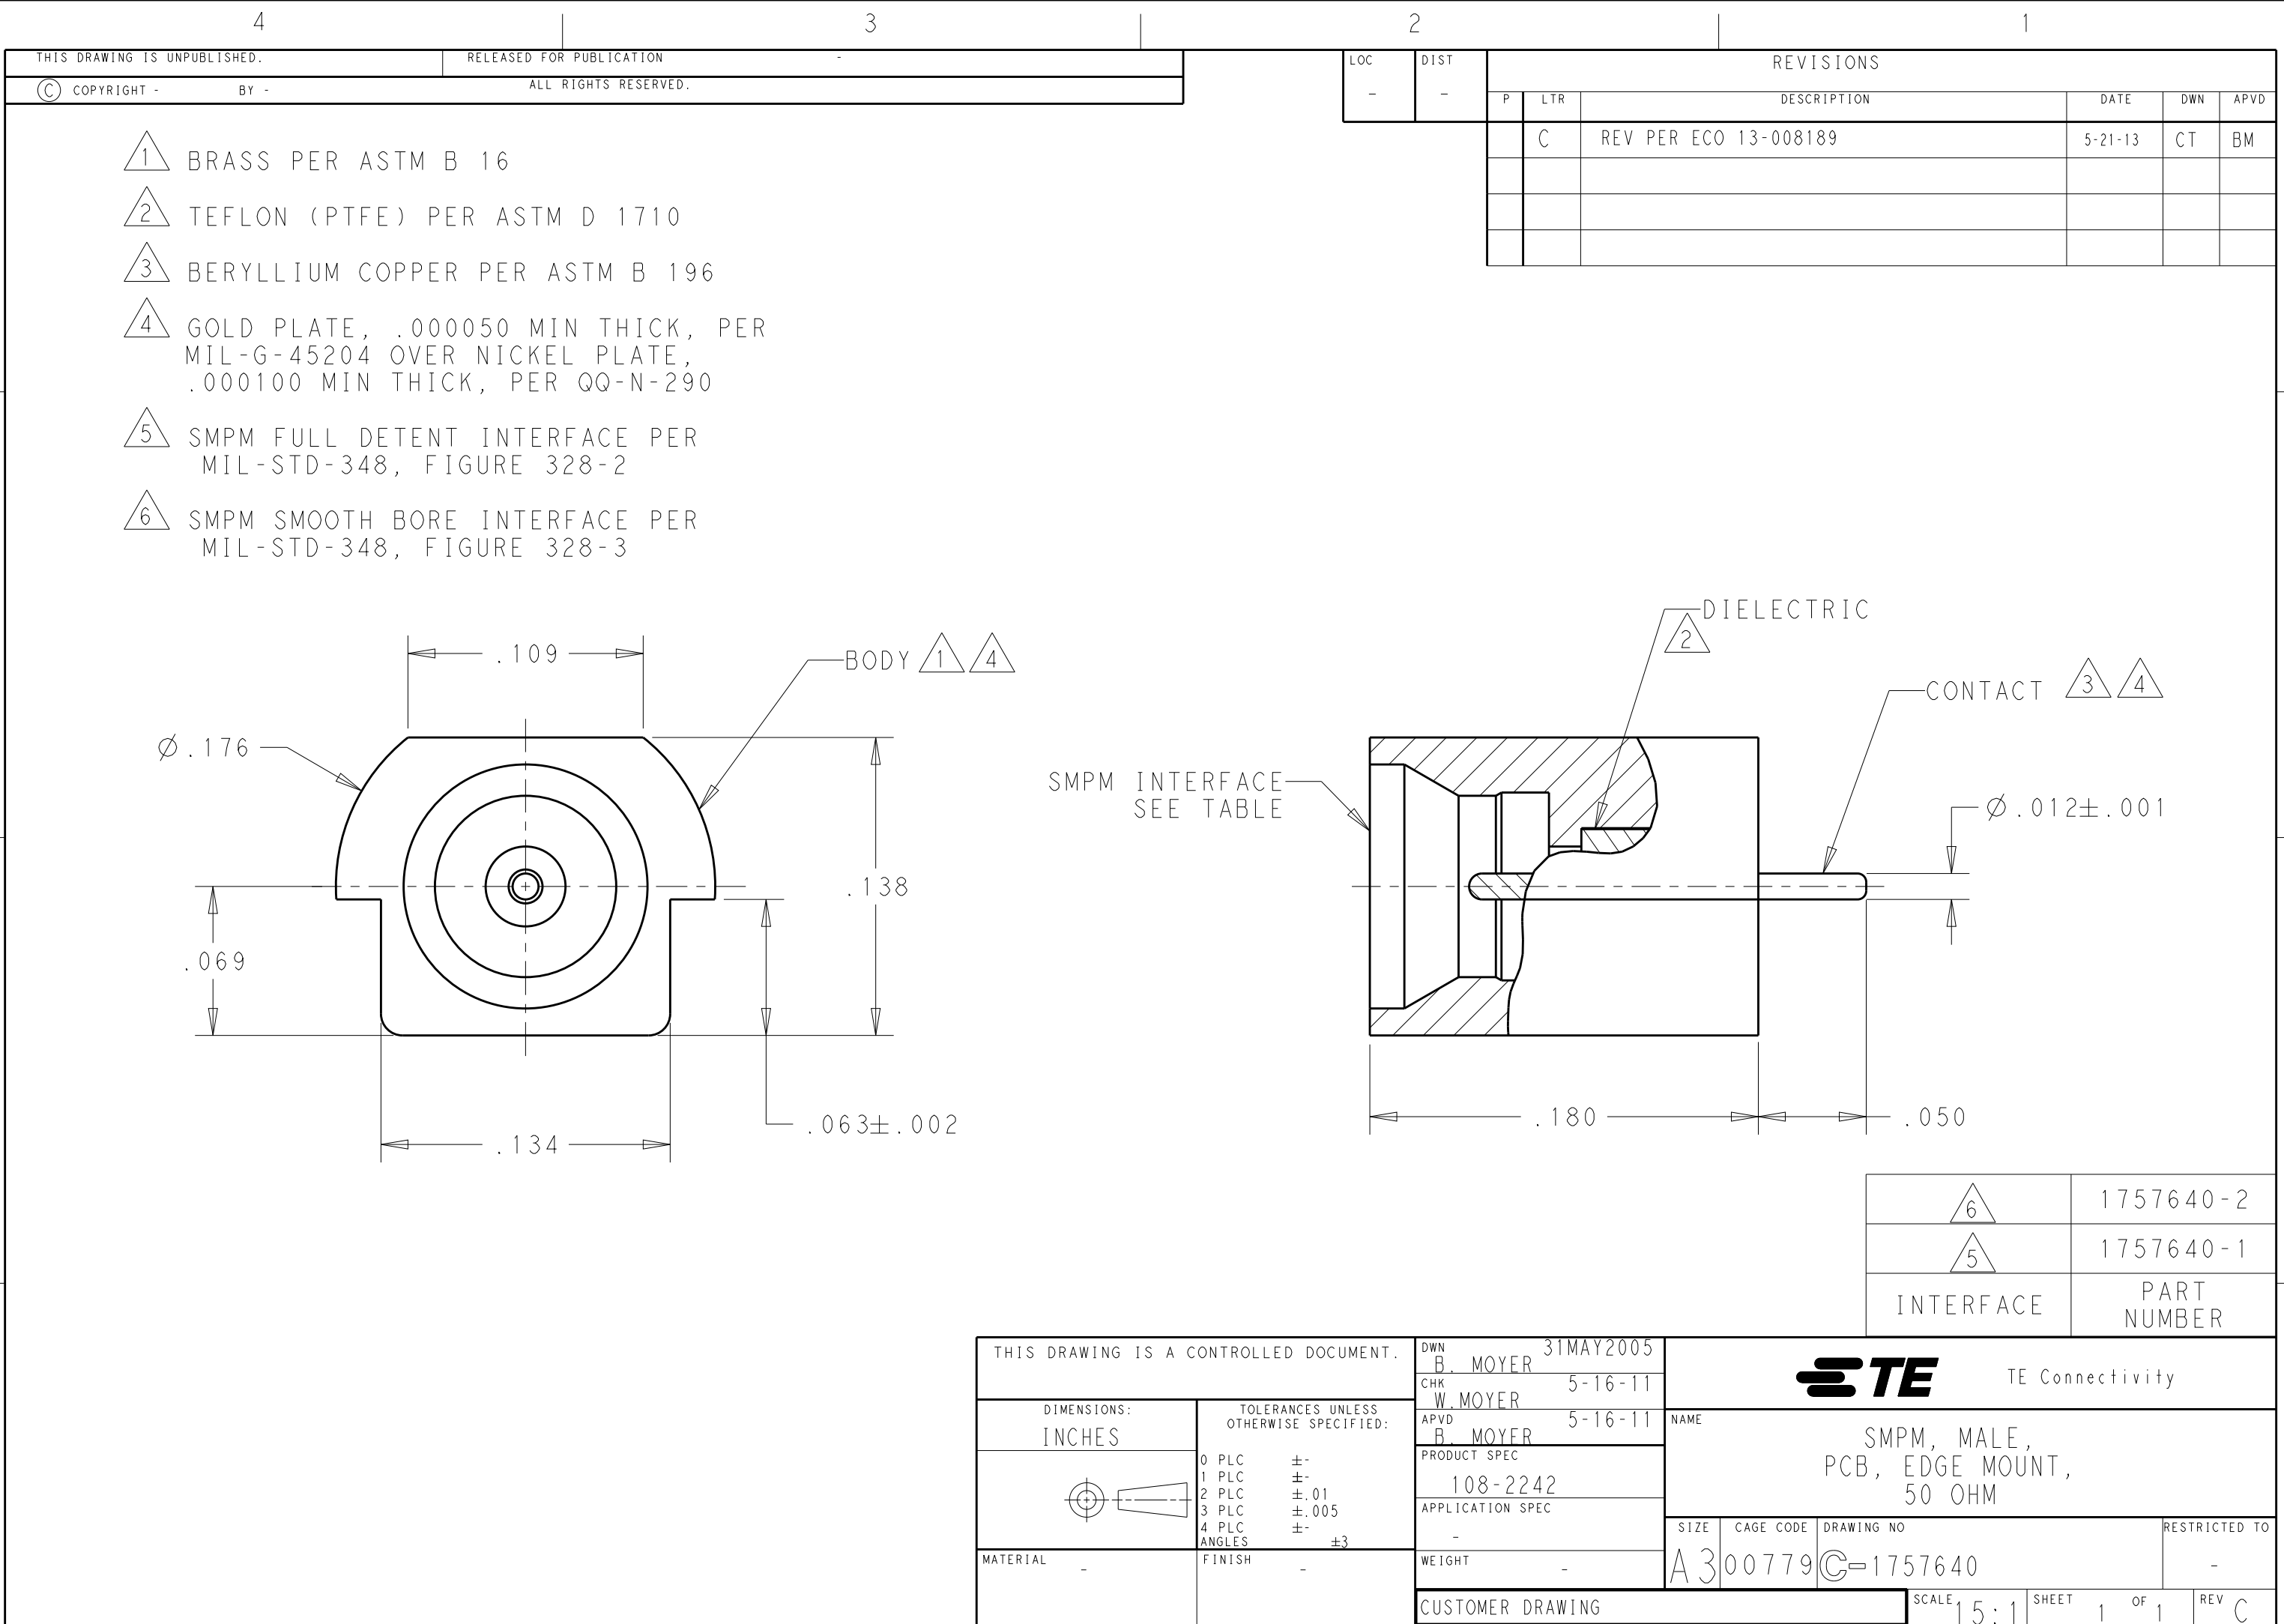




- 1 BRASS PER ASTM B 16
- 2 TEFLON (PTFE) PER ASTM D 1710
- 3 BERYLLIUM COPPER PER ASTM B 196
- 4 GOLD PLATE, .000050 MIN THICK, PER MIL-G-45204 OVER NICKEL PLATE, .000100 MIN THICK, PER QQ-N-290
- 5 SMPM FULL DETENT INTERFACE PER MIL-STD-348, FIGURE 328-2
- 6 SMPM SMOOTH BORE INTERFACE PER MIL-STD-348, FIGURE 328-3

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		C	REV PER ECO 13-008189	5-21-13	CT	BM

6	1757640-2
5	1757640-1
INTERFACE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MOYER 31MAY2005		 TE Connectivity							
DIMENSIONS: INCHES		CHK W. MOYER 5-16-11									
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD B. MOYER 5-16-11		NAME SMPM, MALE, PCB, EDGE MOUNT, 50 OHM						
			PRODUCT SPEC 108-2242								
			APPLICATION SPEC -		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
MATERIAL -		FINISH -		WEIGHT -		A300779		C-1757640	-		
CUSTOMER DRAWING						SCALE	15:1	SHEET	1 OF 1	REV	C