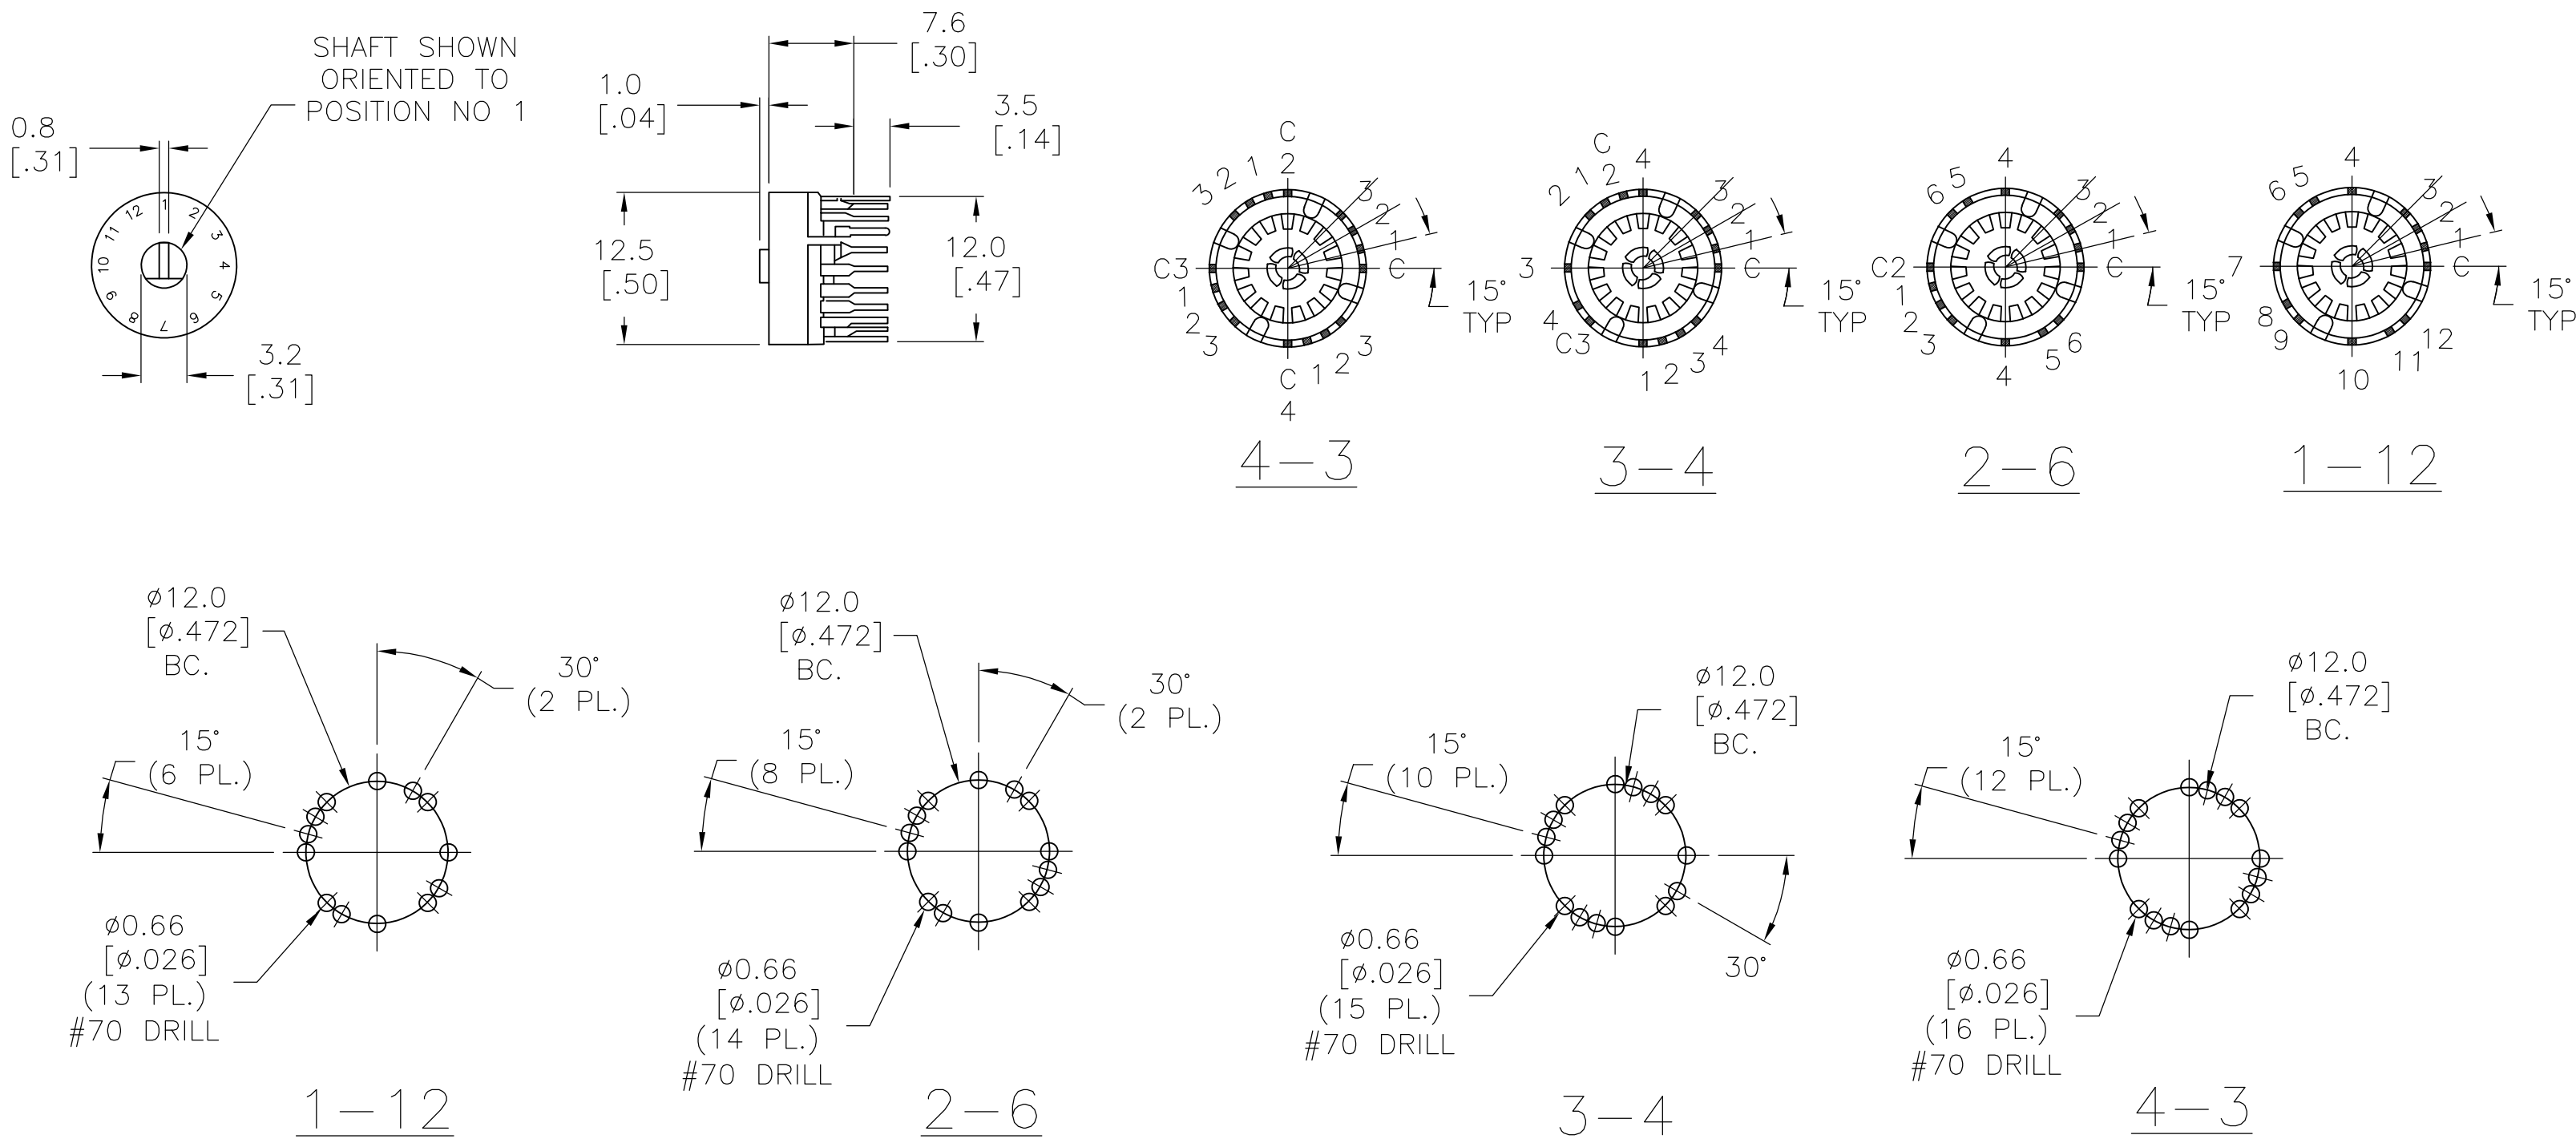


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	0		A2	REVISED PER ECO-11-004917	11MAR11	RK	HMR





- NOTES:
1. TERMINAL NUMBERS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON SWITCHES.
 2. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).

SPECIFICATIONS	
RATING	.4VA MAX. @ 20VDC, OR PEAK AC
TIMING	BREAK BEFORE MAKE
INITIAL CONTACT RESISTANCE	30 MILLIOHMS MAX
INSULATION RESISTANCE	10,000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE	1,000 VRMS AT SEA LEVEL
DURABILITY	10,000 CYCLES @ .4VA RESISTIVE
	30,000 CYCLES @ .1µA 12VDC RESISTIVE
OPERATING FORCE	14 INCH OUNCES
OPERATING TEMPERATURE	-20°C TO +70°C
STORAGE TEMPERATURE	-20°C TO +70°C

MATERIALS		
COMPONENT NAME	BASE MATERIAL	FINISH
BASE	EPOXY	
FIXED CONTACT	BRASS	GOLD OVER NICKEL
MOVEABLE CONTACT	COPPER ALLOY	GOLD OVER NICKEL
TERMINALS	BRASS	TIN OVER NICKEL

3 FIXED.	4	MRJB304	1825536-4
4 FIXED.	3	MRJB404	1825536-3
6 FIXED.	2	MRJB604	1825536-2
12 CONTINUOUS ROTATION.	1	MRJB1204	1825536-1
POSITIONS	POLES	ALCO P/N	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN — 100CT79		 TE Connectivity			
		CHK — 100CT79					
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD — —		NAME	
		0 PLC ± —		PRODUCT SPEC		ROTARY SWITCH 12 POSITION-30DEG DETENT. —	
		1 PLC ± —		—			
		2 PLC ± —		—			
		3 PLC ± —		APPLICATION SPEC			
		4 PLC ± —		—			
MATERIAL		FINISH		SIZE		CAGE CODE	
SEE SPECIFICATIONS		SEE SPECIFICATIONS		WEIGHT —		DRAWING NO	
				A2 00779		RESTRICTED TO	
				C=1825536		—	
CUSTOMER DRAWING						SCALE 2:1	
						SHEET 1 of 1	
						REV A2	