

7

6

5

4

3


2

1

View on mating side

c	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
b																	
a	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1		

A = 16 standard contacts L=3
 C = 16 standard contacts L=3
 S = 32 total number of contacts

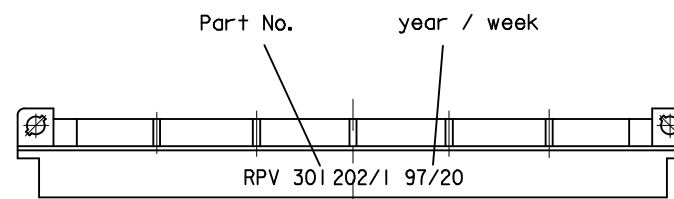

Printing beside row c

Marking	Customer special
Performance level	Customer special
Flux proof	no
Fixing clip	no
Dimensions	SDA-85003-0001 sht.7
Technical Data	PS-85003-0001

C	special	c1+3+5+7....31
A	special	a1+3+5+7....31
Contact symbol	Perform. level	Contact position number

ENTER DESCRIPTION EC NO: I2009-0240 DRWN:PJT 2008/11/28 CHKD:MR HARSHA 2008/11/29 APPR:KPRASAD 2008/11/29			QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
B	REV				DRAWN BY CA	DATE 1997/05/16	TITLE 96 POS. MALE DIN CONNECTOR RPV 301 202/1					
					CHECKED BY KN	DATE 1997/05/16						
					APPROVED BY JB	DATE 1997/05/16						
			ANGULAR ±---°			MATERIAL NO. ENTER PART		DOCUMENT NO. SDA-85300-0464			SHEET NO. 1 OF 00	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A 4		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

6

5

4

3

2

1