

D

C

B




A

D

C

B

A

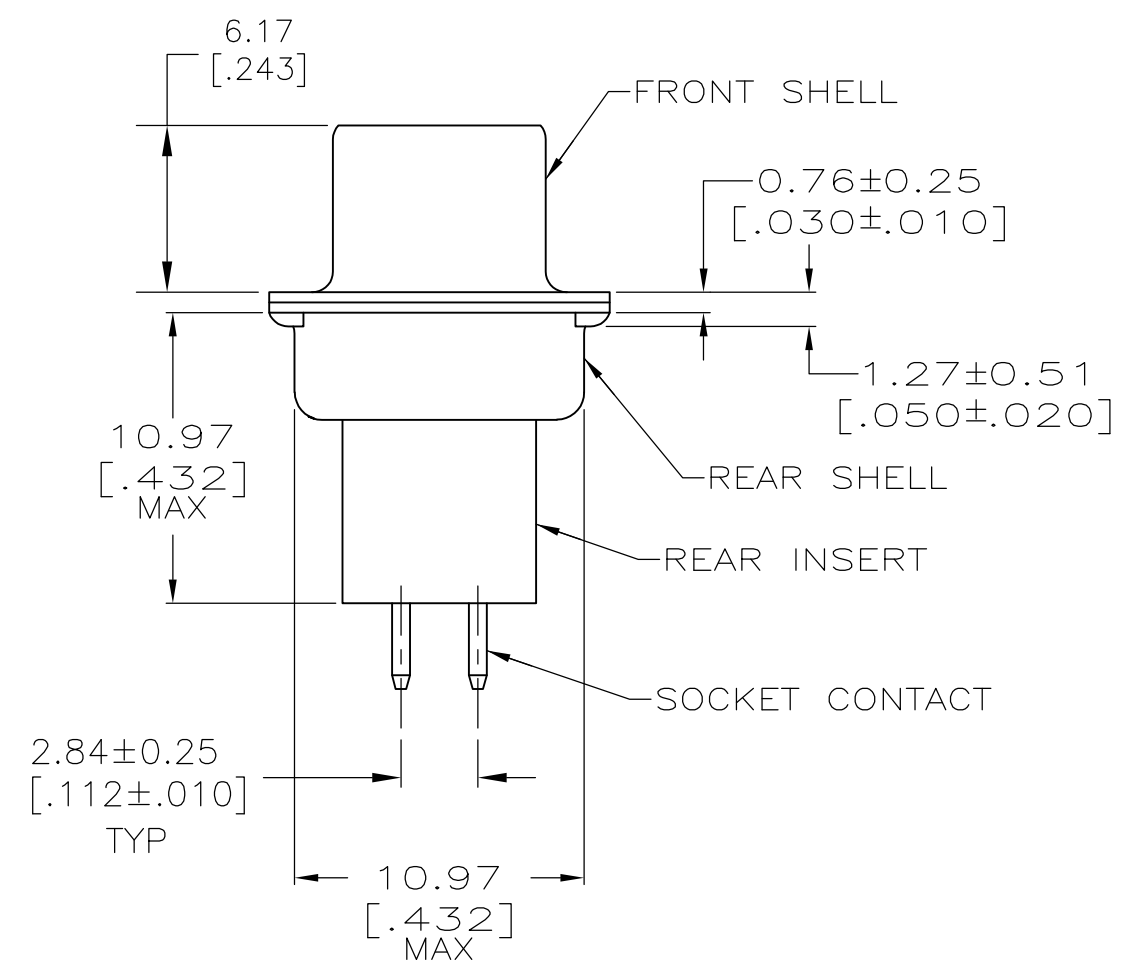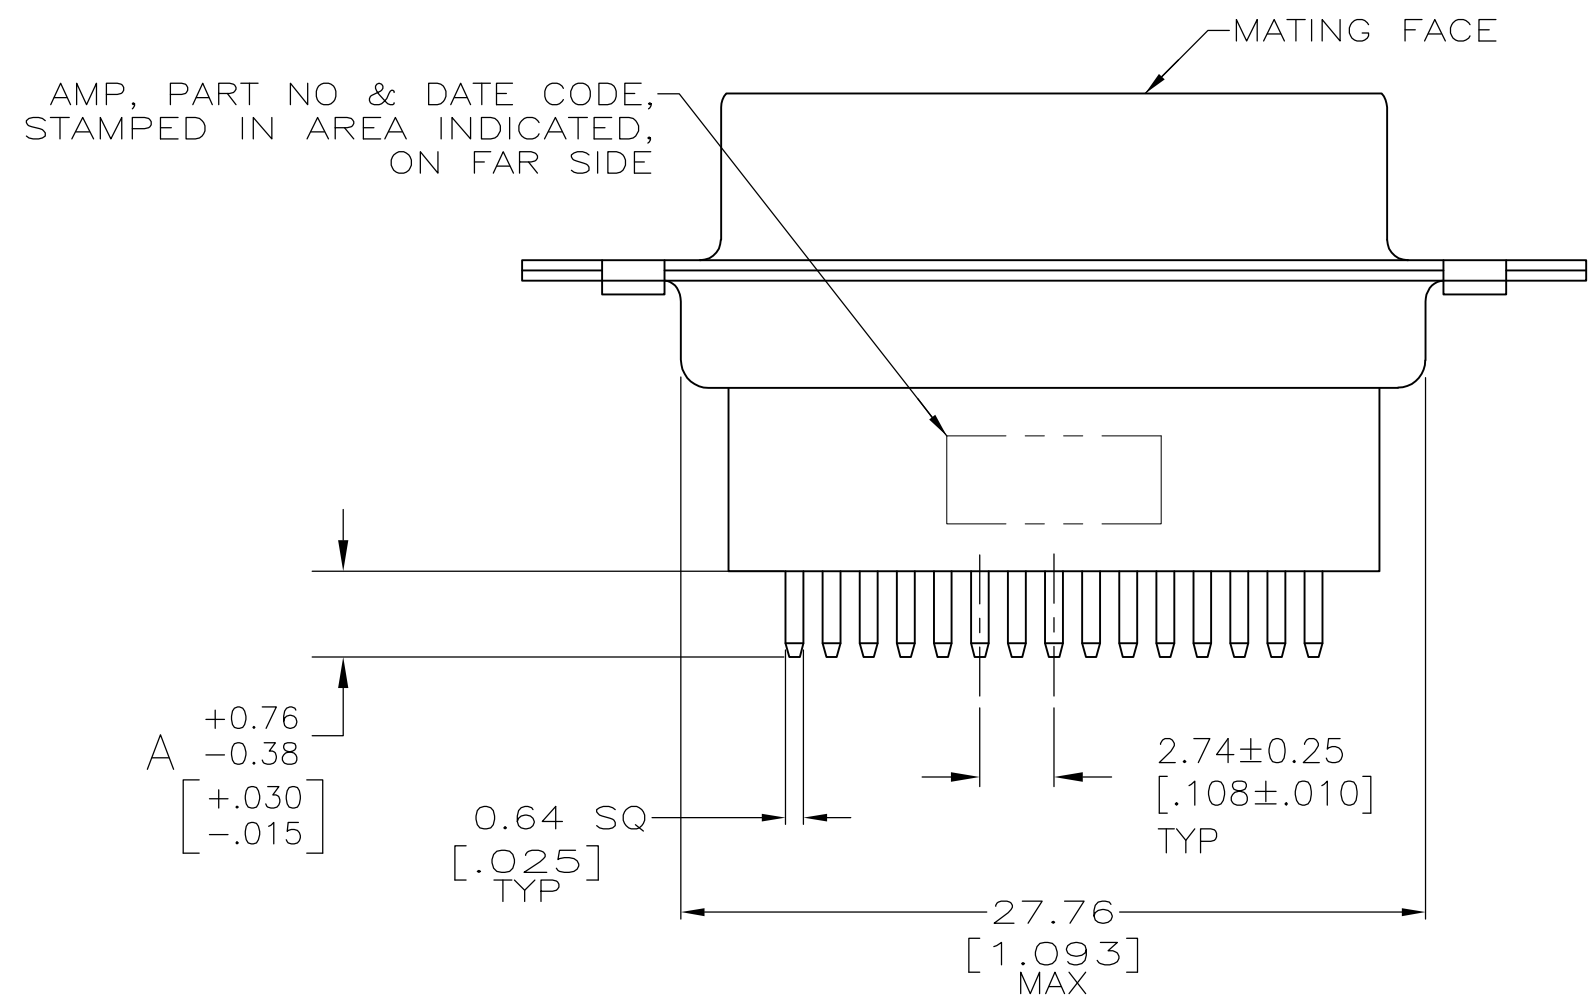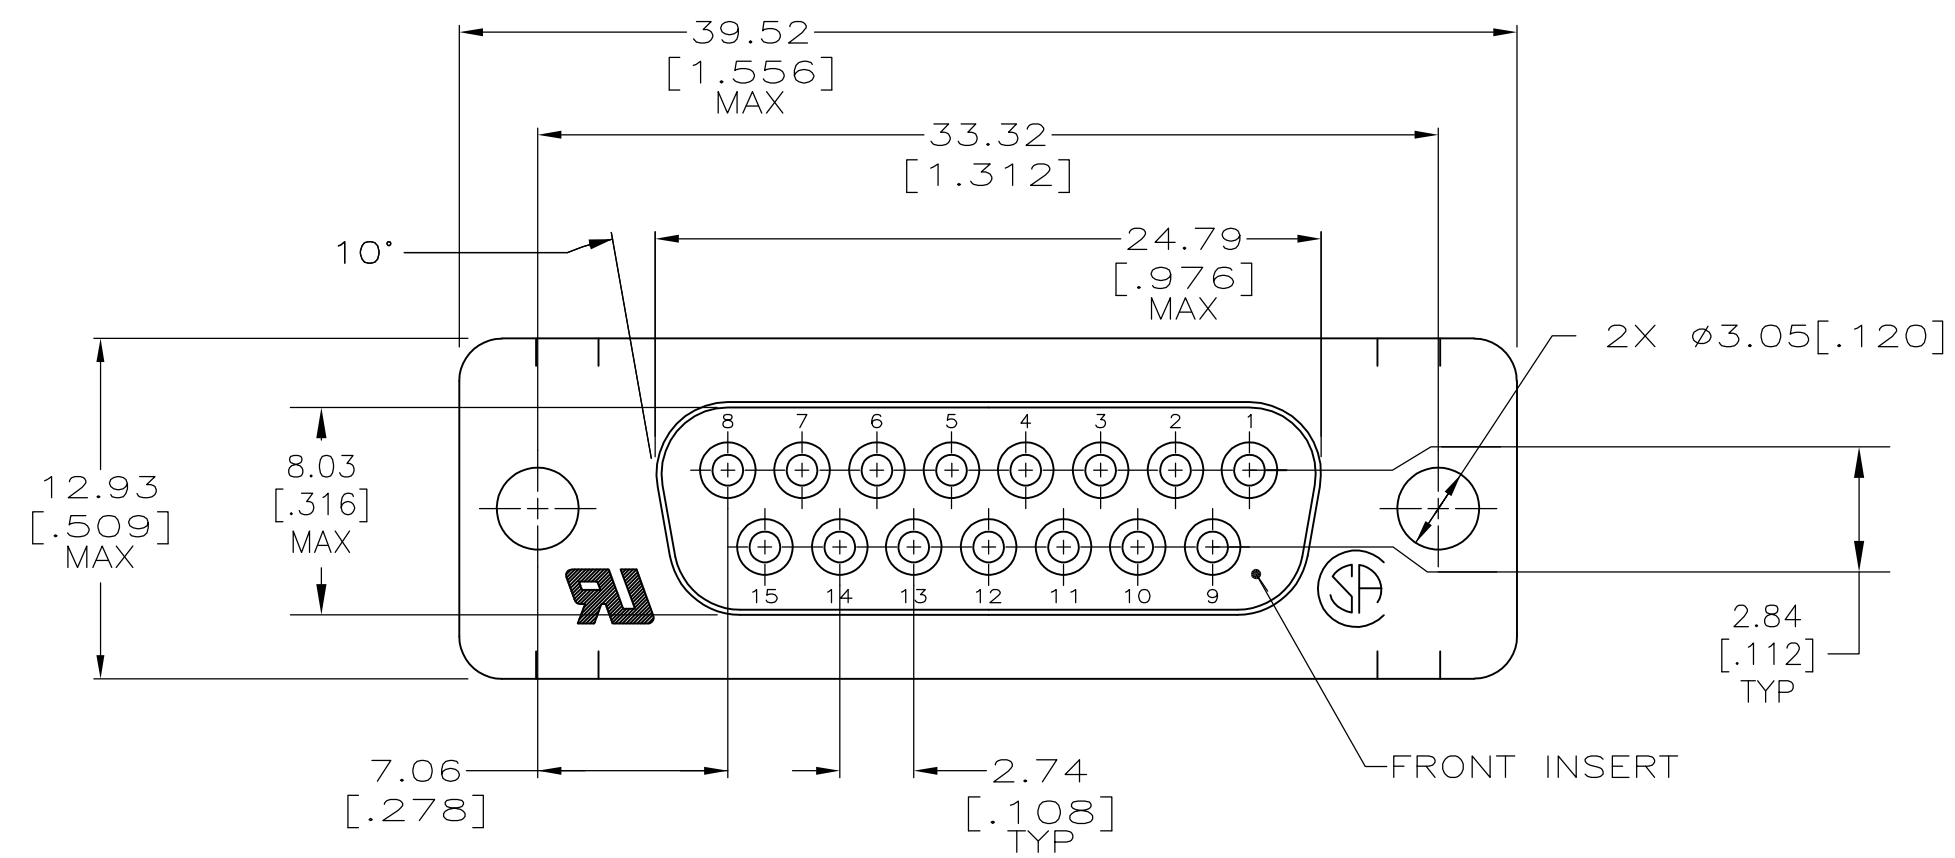

- 1

MOLDED PARTS: GLASS-FILLED PBT OR GLASS-FILLED NYLON, UL94V-0 RATED. COLOR: BLACK
SHELLS: CARBON STEEL
CONTACTS: PHOS BRONZE
- 2

SHELLS: 5.08µm [.000200] MIN ZINC WITH YELLOW CHROMATE COATING.
CONTACTS: GOLD FLASH ON MATING END, 2.54µm [.000100] MIN TIN-LEAD ON SOLDER END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
- 7

SHELLS: 5.08µm [.000200] MIN ZINC WITH YELLOW CHROMATE COATING.
CONTACTS: 0.76µm [.000030] MIN GOLD IN MATED AREA, 2.54µm [.000100] MIN TIN-LEAD ON SOLDER END, BOTH OVER 1.27µm [.000050] MIN NICKEL.
OR
GOLD FLASH OVER PALLADIUM-NICKEL
0.76µm [.000030] MIN TOTAL ON MATING AREA, 2.54µm [.000100] MIN TIN-LEAD ON SOLDER END, BOTH OVER 1.27µm [.000050] MIN NICKEL.

3. NOTE DELETED.
4. NOTE DELETED.
5. NOTE DELETED.
6. NOTE DELETED.

OBSOLETE	-	-	205736-9
SUPSD BY 205736-7	2	4.78 [.188]	205736-8
	7	4.78 [.188]	205736-7
OBSOLETE	2	16.54 [.651]	205736-6
SUPSD BY 745185-5	7	16.54 [.651]	205736-5
	2	10.85 [.427]	205736-4
SUPSD BY 745185-5	7	10.85 [.427]	205736-3
SUPSD BY 205736-1	2	3.18 [.125]	205736-2
OBSOLETE	7	3.18 [.125]	205736-1
	GOLD FINISH	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009

DIMENSIONS:
mm [INCHES]

MATERIAL

1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± 0.13 [.005]
3 PLC	± -
4 PLC	± -
ANGLES	± 2°

FINISH

2

3

DWN
J. POLIGNONE
CHK
E. BRIANT
APVD
E. BRIANT

01FEB07
01FEB07
01FEB07

PRODUCT SPEC
108-40025
APPLICATION SPEC
114-40013
WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
RECEPTACLE ASSY, SIZE 2,
15 POSITION, FOR PCB
AMPLIMITE HDP

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=205736

RESTRICTED TO
-

SCALE
NTS

SHEET
1 OF 1

REV
Z