



### Main

|                                    |  |
|------------------------------------|--|
| Range of product                   | Harmony XVB Universal  |
| Product or component type          | Complete beacon  |
| Beacon or indicator bank unit type | Base unit with direct or tube fixing mode<br>Illuminated unit              |
| Signalling type                    | Flashing   |
| Mounting diameter                  | 2.76 in (70 mm)  |
| Component name                     | XVBL   |
| Material                           | Glass reinforced polyamide (base unit)<br>Polycarbonate (illuminated unit) |
| Light source                       | Clear bulb not included  |
| Bulb type                          | Incandescent with BA 15d<br>Protected LED                                  |
| [Us] rated supply voltage          | 48...230 V AC  |
| Power dissipation in W             | <= 7 W   |

### Complementary

|  |   |
|--|---|
| Connections - terminals                | Screw clamp terminals, connection capacity: <= 1 x 1.5 mm <sup>2</sup> with cable end |
| [Ui] rated insulation voltage          | 250 V conforming to IEC 60947-1   |
| Nominal voltage limit                  | 0.85...1.1 Un conforming to IEC 60947-5-1   |
| [Uimp] rated impulse withstand voltage | 4 kV conforming to IEC 60947-1  |
| Flashing frequency                     | 1 Hz  |
| CAD overall width                      | 2.76 in (70 mm)   |
| CAD overall height                     | 5.47 in (139 mm)  |
| CAD overall depth                      | 2.76 in (70 mm)   |
| Terminals description ISO n°1          | (COM-1)PW<br>(GND)GROUND  |
| Product weight                         | 0.62 lb(US) (0.28 kg)   |

### Environment

|                                     |  |
|-------------------------------------|--|
| pollution degree                    | 2  |
| product certifications              | CCC<br>CSA C22-2 No 14<br>GOST<br>UL 508   |
| standards                           | EN/IEC 60947-5-1   |
| protective treatment                | TC   |
| ambient air temperature for storage | -40...158 °F (-40...70 °C)   |
| electrical shock protection class   | Class I (on support tube) conforming to IEC 61140<br>Class II (on base unit) conforming to IEC 61140 |
| IP degree of protection             | IP65 (on fixing base XVBZ0.) conforming to IEC 60529<br>IP66 (on base unit) conforming to IEC 60529  |
| NEMA degree of protection           | NEMA 4X (indoor) conforming to UL 508  |


### Offer Sustainability

|  |  |
|--|--|
| WARNING: This product can expose you to chemicals including:   | WARNING: This product can expose you to chemicals including:   |
| Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. | Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. |
| For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                                    | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                                    |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Illuminated Beacon for BA 15d Bulb or LED

### Dimensions

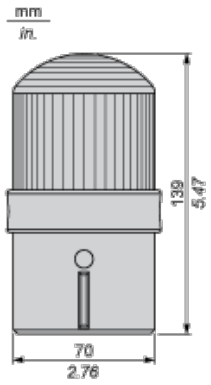

## Illuminated Beacon

### Wiring Diagram

