


REV.	DATE	ECR NO.	DESCRIPTION
A	02/10/10	XXXXXX	UPDATE DRAWING FORMAT

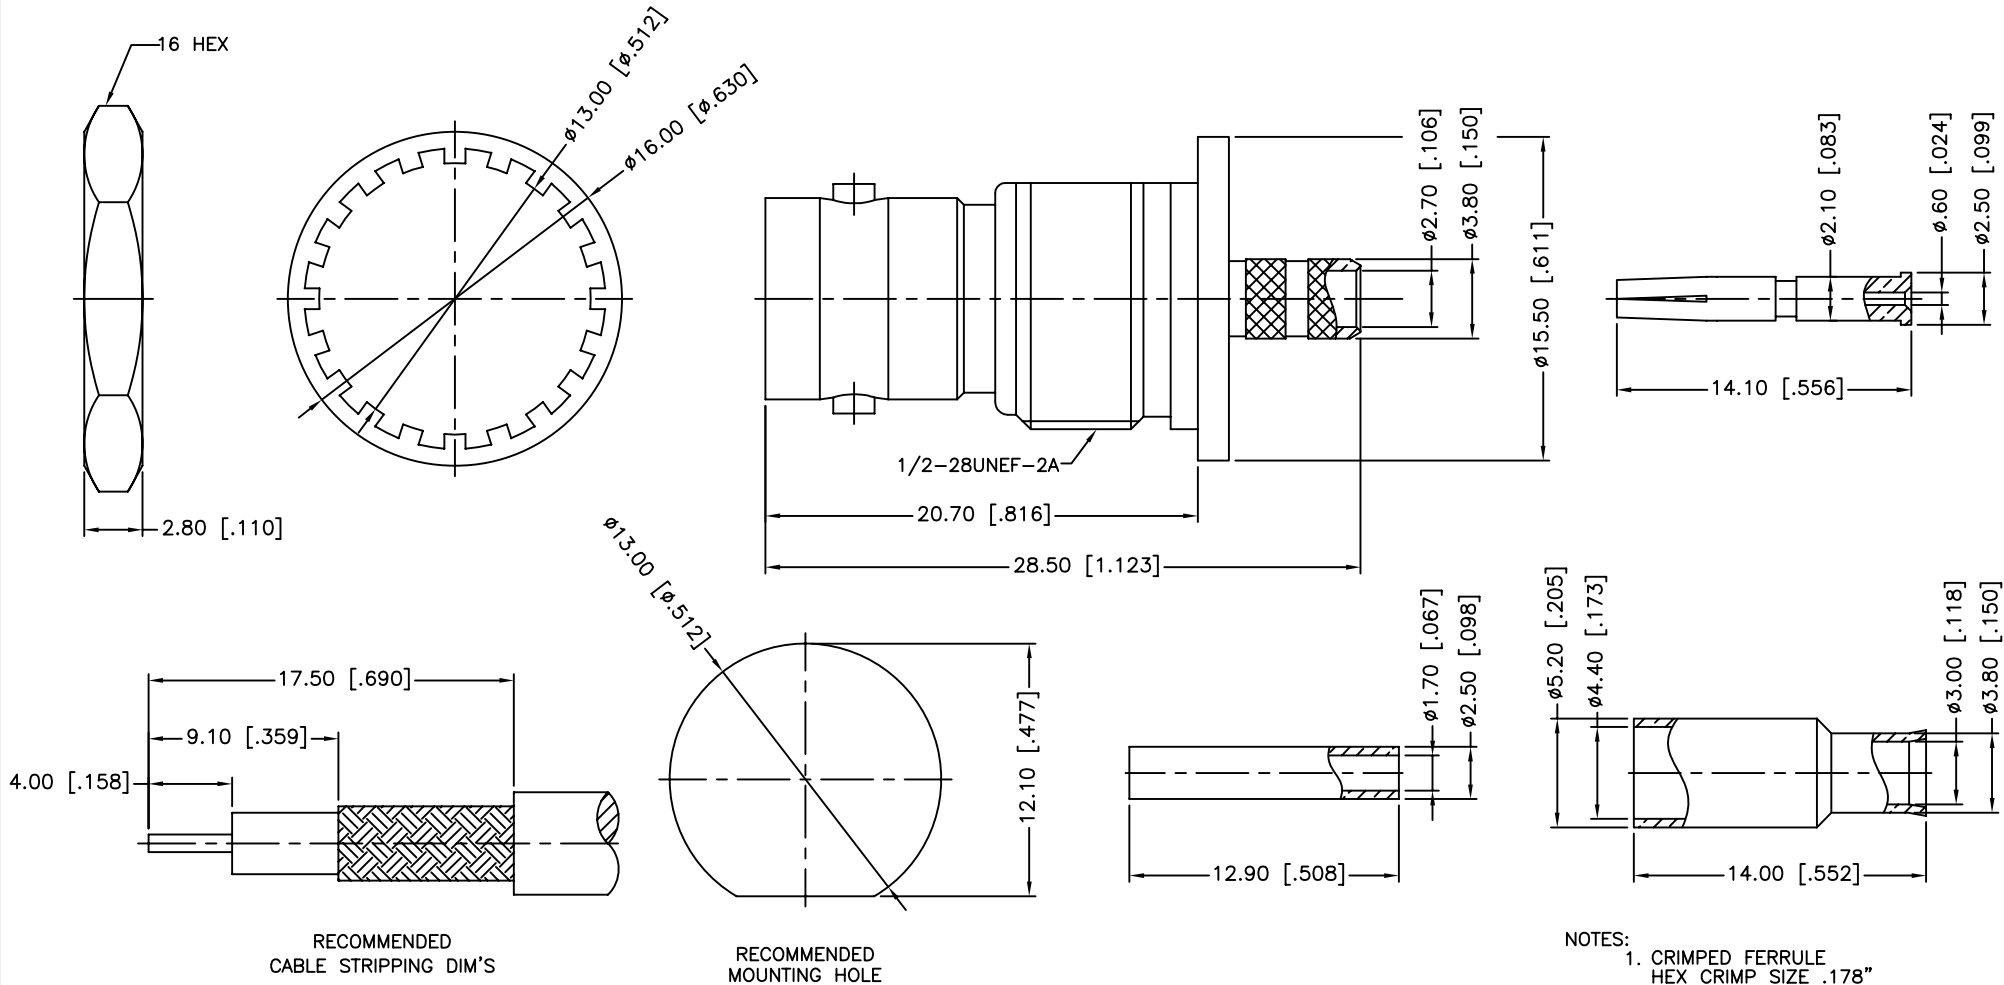

10	FERRULE	COPPER	NICKEL	1
9	SLEEVE	DELTRIN	NATURAL	1
8	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
7	HEX NUT	BRASS	NICKEL	1
6	LOCK WASHER	BRASS	NICKEL	1
5	BARREL	BRASS	NICKEL	1
4	INSULATOR	DELTRIN	NATURAL	1
3	INSULATOR	PTFE	NATURAL	1
2	BODY	BRASS	NICKEL	1
1	HOUSING	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS	DATE	Amphenol Connex	
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm		DRAWN	TANGOR		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"		CHECKED			
DO NOT SCALE DRAWING		ISSUED			
		SHEET	1 OF 1	PART DESCRIPTION	
		CAD FILE	C:/CONNEX/112252.DWG	BNC BULKHEAD ISOLATED CRIMP JACK (FOR RG-174/U,188A/U,316/U)	
				PART NO.	
				112252	
				DWG. NO.	112252.DWG
				REV.	A
				SIZE	A
				SCALE	NA