











PRODUCT NO.	PIN NUMBER							DIM"A"	PCB THICKNESS		PRODUCT NO.	PIN NUMBER							DIM"A"	PCB THICKNESS		PRODUCT NO.	PIN NUMBER							DIM"A"	PCB THICKNESS	
	ROW #	6	5	4	3	2	1					ROW #	6	5	4	3	2	1					ROW #	6	5	4	3	2	1			
88949-X02 88949-X02LF	D		✓			✓	2.90	1.6		88949-X22LF	D		✓			NO	2.90	1.6		88949-X32LF	D		✓			✓	2.90	1.6				
	C		✓			✓					C		✓			NO					C		NO		NO							
	B		✓			✓					B		✓			NO					B		NO		NO							
	A		✓			✓					A		✓			NO					A		✓		✓							
88949-X12 88949-X12LF	D		✓			✓	3.53	2.4			88949-X22LF	D		✓			NO	88949-X32LF	D			✓			✓							
	C		✓			✓						C		✓			NO		C			NO		NO								
	B		✓			✓						B		✓			NO		B			NO		NO								
	A		✓			✓						A		✓			NO		A			✓		✓								

SEE NOTE 6
14.65 REF.

6.00


4.00

3.00±0.15

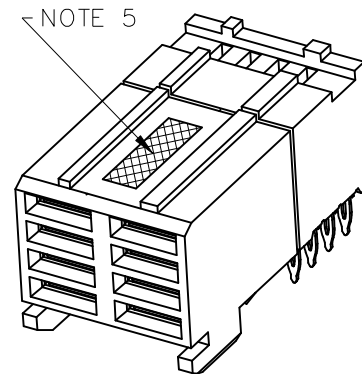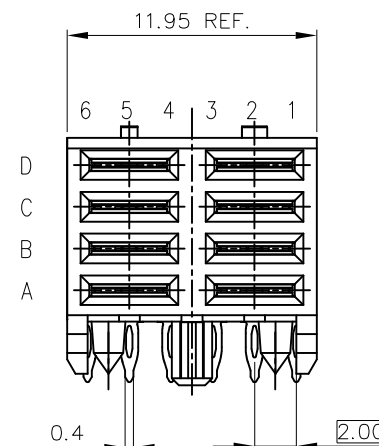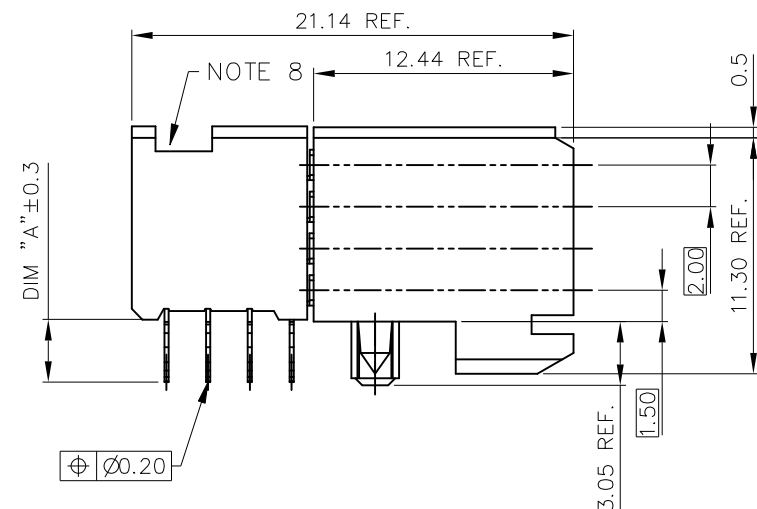


PLATING CONTACT AREA:	
DASH NR:	PERFORMANCE LEVEL
-1YY	TELCORDIA CO
-2YY	CUSTOMER SPECIAL
-3YY	CUSTOMER SPECIAL
-9YY	TELCORDIA CO
-1YYLF	TELCORDIA CO
-2YYLF	CUSTOMER SPECIAL
-3YYLF	CUSTOMER SPECIAL
-9YYLF	TELCORDIA CO

PRESS-FIT HOLES CHART	
HOLE DIAMETER AFTER PLATING	0.65-0.80
DRILLED HOLE	0.81-0.86
COPPER PLATING	0.025 MIN.
SnPb PLATING	0.005-0.015

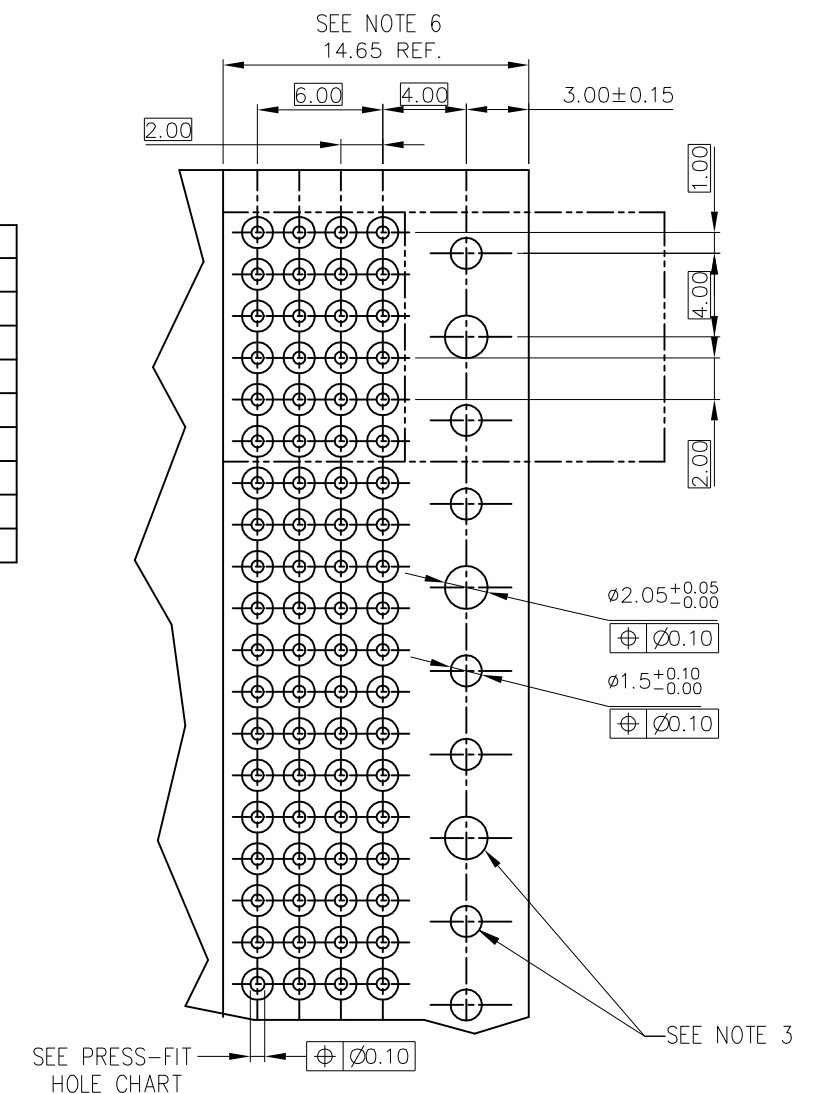

NOTES:

1. BODY MATERIAL: LIQUID CRYSTAL POLYMER 30% GLASS, FLAME RETARDANT ACC. UL 94-V0.
2. TERMINAL MATERIAL: PHOSPHOR BRONZE.
3. INDICATED HOLES ARE UNPLATED.
4. PLATING OF COMPLIANT SECTION 0.5-1.5 μ m SnPb 85-97 OR 0.5-1.5 μ m PURE Sn FOR LEAD FREE.
5. PRODUCT MARKING : PARTNUMBER & BATCH ID.
6. SET BACK FOR PRESS BLOCK.
7. SEE TA-941 FOR APPLICATION TOOLING.
8. TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD.
9. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008 .
10. THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
11. PRODUCT SPECIFICATION: GS-12-453.
12. APPLICATION SPECIFICATION: GS-20-001.
13. FOR THE PRODUCT WITH 30u" GOLD PLATING IN TERMINAL, THEY CAN BE REPLACED BY 30 GXT PLATING.

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406/ISO 1101		projection 		product family METRAL(tm) HPL559										
ltr	ecn no	dr	date	tolerances unless otherwise specified				scale 1:1		title R/A PRESS-FIT POWER RECEPTACLE ASSY.-12MM										
D	V61180	EPK	8/28/96	angles	linear					.0±.3										
E	V00849	JWS	5/31/00							.00±.13										
F	DG04-0107	CLu	041228							0°±2° .000±.051										
G	DG07-0458	Cenh	11/15/07	dr	STU STONER		921029				dwg no						sheet1 of 1		size	
H	DG08-0171	TER	8/26/08	engr	R.DOUTRICH		921029				88949						A4			
J	EXL-N-23443	NICK	3/4/16	chr	STU STONER		921029													
K	ELX-N-26608	MZ	3/28/17	appd	STU STONER		921029													
sheet index		revision		k																
		sheet		1																