

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

SEP, 2000.

© COPYRIGHT 2000 By Tyco Electronics Japan G.K.

ALL RIGHTS RESERVED.

LOC
JDIST
/

REVISIONS

変更

P

LTR

DESCRIPTION

DATE

DWN

APVD

Y

REDRAWN


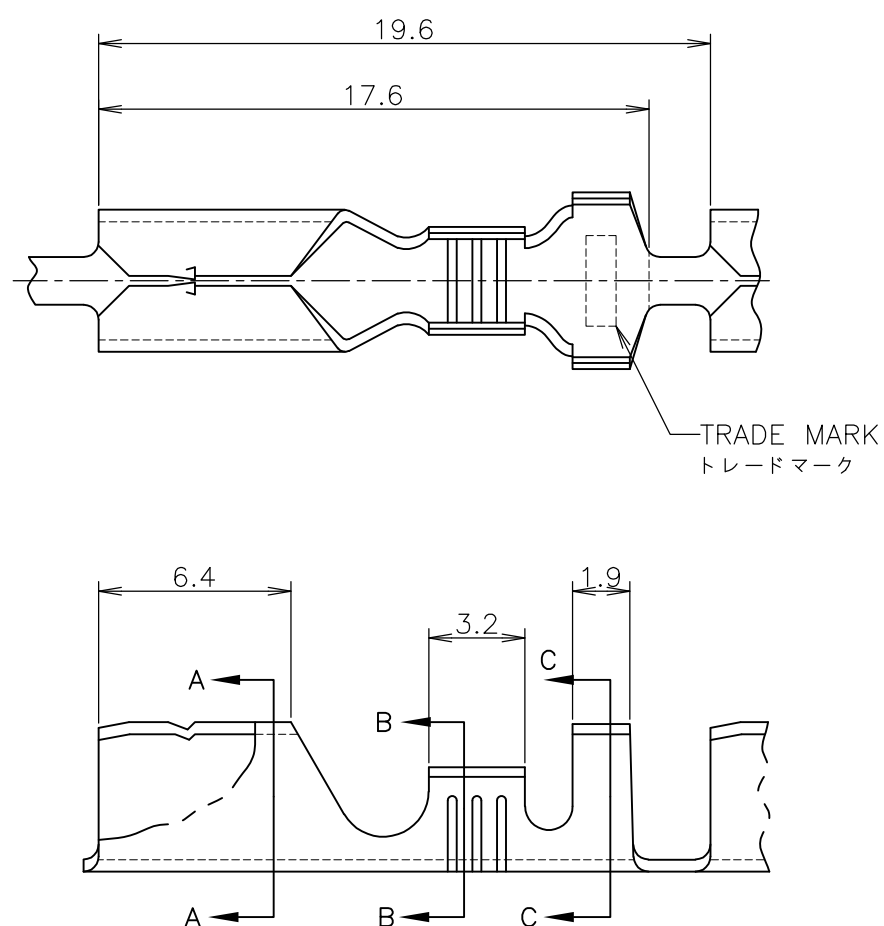


ECR-11-012298

15JUN2011

T.T

T.M

— —; AS SHOWN

CONTROLLED DIMENSION TO KEEP
INSERTION FORCE AND EXTRACTION FORCE

① 1st EXTRACTION FORCE :14.7~44.1N (1.5~4.5kgf)
(APPLICABLE CONTACT P/N 170002-4)

② STRESS RELIEVING
FINISH IS SUBJECT TO CHANGE BY THE TYPE OF STRESS RELIEVING PROCESS.
INERT GAS FURNACE -- MATTE
ATMOSPHERIC FURNACE FOLLOWED BY ACID PICKLE -- BRIGHT

③ WITH PAPER LAYER


① 初回引抜き : 14.7~44.1N (1.5~4.5kgf)
(嵌合相手 P/N: 170002-4)

② ストレス除去処理
処理法により外観が変わります。
不活性ガス加熱方法...無光沢
大気加熱方式...光沢

③ 中間紙あり

9-170003-5	—//—	7000	③	108-5003	—//— ②
170003-6	—//—	7000		108-5003 準抛 ①	NON ACID CLEANING 酸洗処理なし
2-170003-5	—//—	24000		108-5003	—//— ②
1-170003-5	—//—	25000		108-5003	—//— ②
1-170003-4	—//—	24000		108-5003	POST-TIN 電気錫めっき
170003-5	170021-3	7000		108-5003	—//— ②
170003-4	170021-2	7000		108-5003	POST-TIN 電気錫めっき
PARTS NUMBER 端子型番	L/P PARTS NUMBER L/P 型番	QTY/REEL 1リール当り数量	PRODUCT SPEC 製品規格番号	FINISH 仕上げ	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mmTOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC	±	±0.4
1 PLC	±	±1.0
2 PLC	±	
3 PLC	±	
4 PLC	±	
ANGLES	±	

MATERIAL
材料
BRASS THK 0.4
黄銅 板厚 0.4FINISH
仕上
SEE TABLE
表参照

DWN T.TSUZAKI 15JUN2011

CHK T.MASUDA 15JUN2011

APVD T.MASUDA 15JUN2011

PRODUCT SPEC
製品規格
108-5003APPLICATION SPEC
取付適用規格

WEIGHT

CUSTOMER DRAWING

WIRE RANGE
抱合電線断面積
AWG#20~#14
0.50~2.27 mm²INSULATION DIA
被覆外径
2.5~3.8 mm ϕ

STE

TE Connectivity

NAME
名称
5 DIA SHUR PLUG RECEPTACLE
Ø5 シェアー プラグ リセプタクル

SIZE

CAGE CODE

DRAWING NO
番号

A300779

C-170003

RESTRICTED TO

SCALE
尺度
NONE

SHEET

1 OF 1

REV
Y