
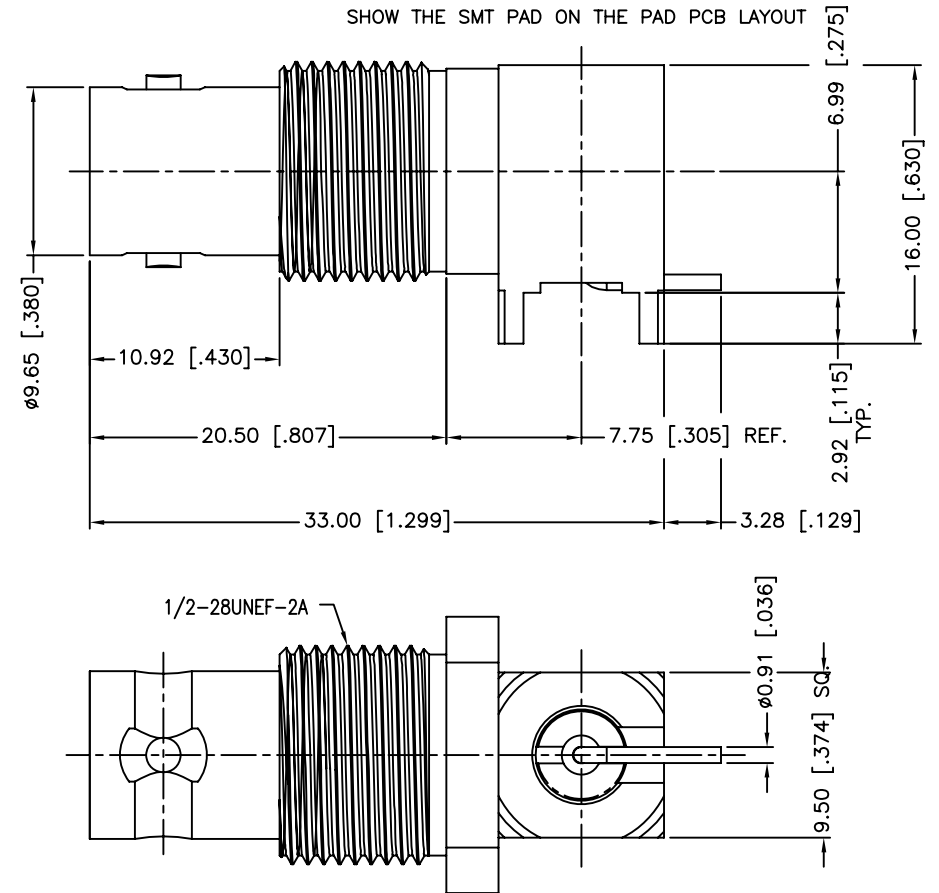


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/22/10	XXXXXX	INITIAL RELEASE
E	04/15/10	2040	CHANG BACK BODY PLATED FROM MATTE TIN TO NICKEL
F	04/26/10	2042	

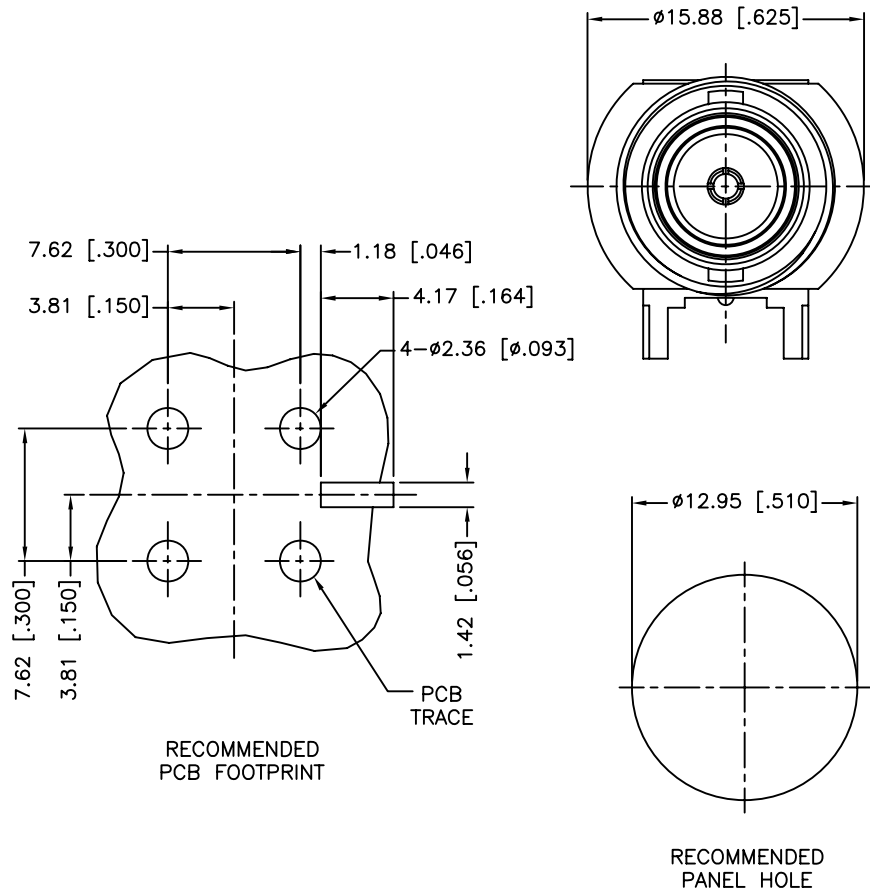

- FREQUENCY RANGE: DC – 1 GHz
- VSWR(RETURN LOSS): 1.12 (25dB), MAX DC – 1.5GHz
1.22 (20dB), MAX 1.5 – 3 GHz
VSWR PERFORMANCE DEPENDANT UPON PCB LAUNCH CONFIGURATION

7	INSULATOR DISC	PTFE	NATURAL	1
6	BODY-CUBE	BRASS	NICKEL	1
5	CONTACT-REAR	BRASS	GOLD	1
4	INSULATOR	PTFE	NATURAL	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	LOCK RING	BRASS	NICKEL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	04/26/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/112800.DWG	

Amphenol Connex			
PART DESCRIPTION BNC R/A PCB JACK THRU LEG, SMT CONTACT BULKHEAD – 75 OHM			
PART NO. 112800			
DWG. NO. 112800.DWG	REV. F	SIZE A	SCALE NA