

MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
21EN65-RB1

21EN65-RB1

M

DRAWING
NUMBER

ISSUE

II

REPLACES

PR-8581

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK




CHECK

CHECK

CHECK

A	CO44351
J	A P
13	SEPT 79
B	PR 8581
G	J W
21	MAR 80
C	CO47573
	PART 4
R	J H
11	AUG 80

FO-5285 1-B
DRAWN
J A P 13 SEPT 79

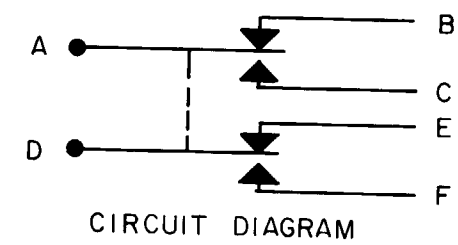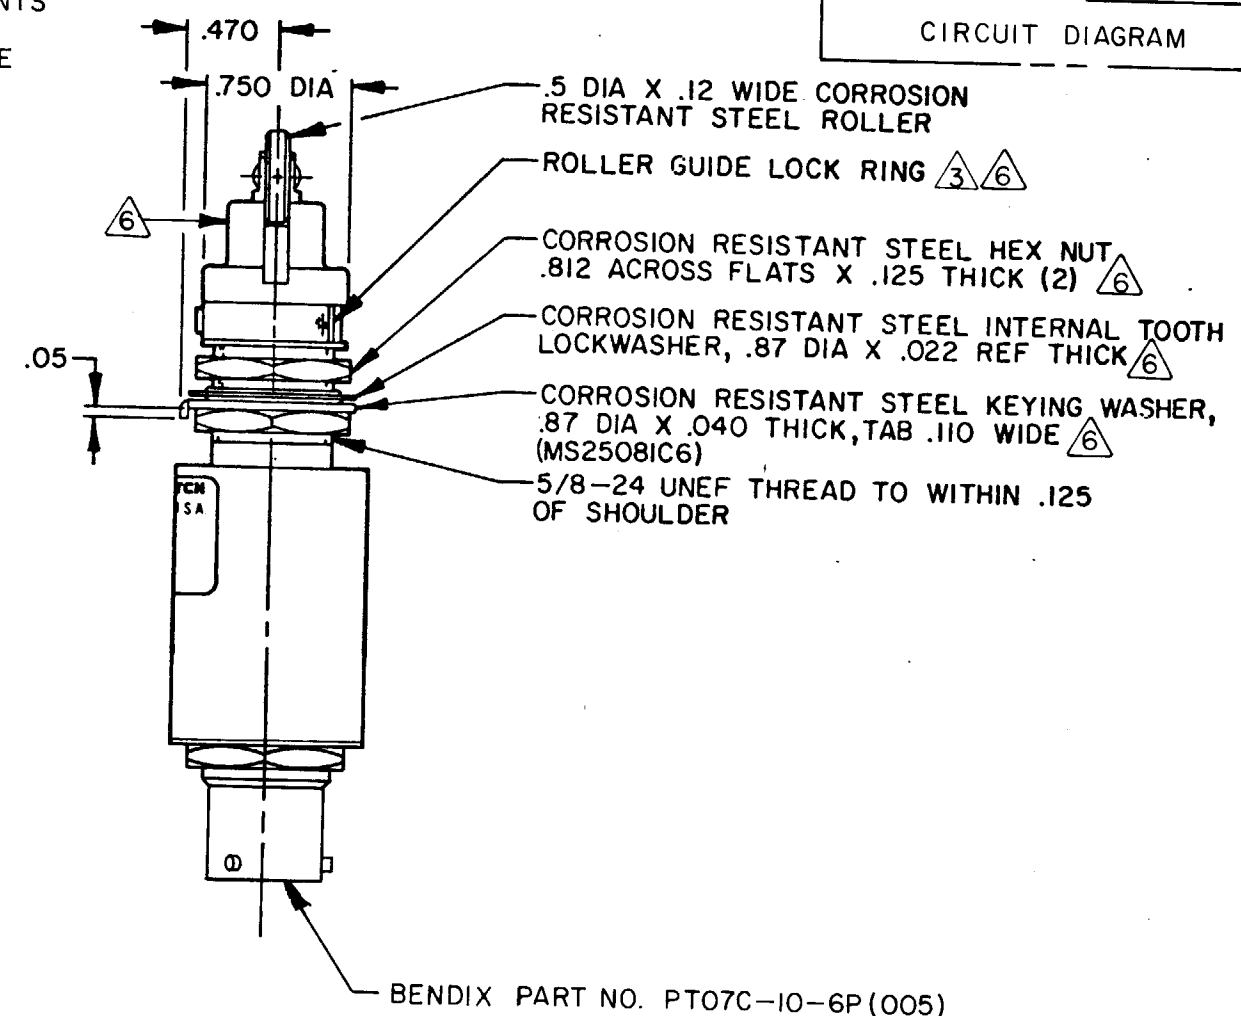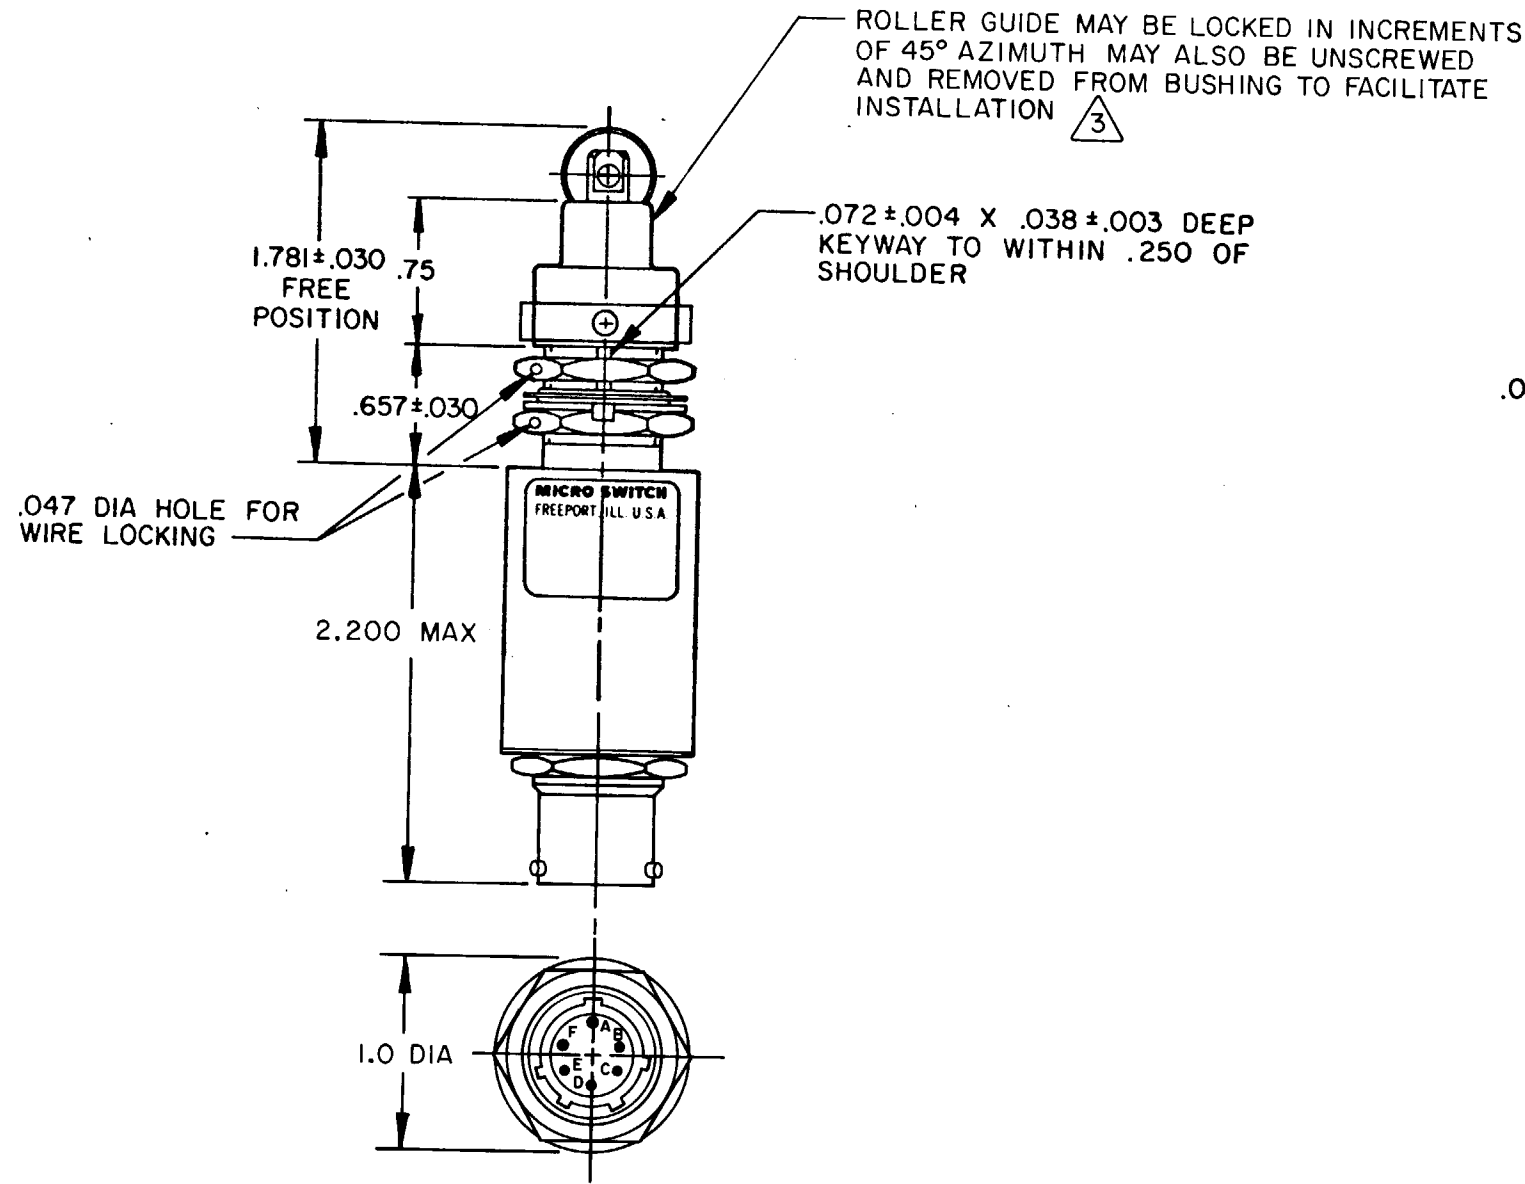

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4
 - (3) TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK RING
 - 4 - CIRCUIT DIAGRAM AND CAT. LIST. ARE SHOWN ON NAMEPLATE
 - 5 - CONTACTS "A" - "C" AND "D" - "F" MAKE WITHIN .003 CONTACTS "A" - "B" AND "D" - "E" MAKE WITHIN .006
 - (6) - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE	6-12 LB	CONTACT ARRANGEMENT	
DIFFERENTIAL FORCE	30 LB MAX	S P D T (2)	
RELEASE FORCE	4 LB MIN	28 VDC	
PRETRAVEL	.040 MAX	LOAD	
DIFFERENTIAL TRAVEL	.020 MAX	SEA LEVEL	50,000 FT.
OVERTRAVEL	.250 MIN	RES	4
		IND	2
		MOTOR	4

SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±			
DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/16	0.015
ONE PLACE	X.X	0.015	0.015
TWO PLACES	X.XX	0.0015	0.0015
THREE PLACES	X.XXX	0.00015	0.00015
ANGLES			
SI METRIC		US CUSTOMARY	
DESIGN UNITS		THIRD ANGLE PROJECTION	
			
WEIGHT 3.75 OZ MAX			