



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT TOOL NO.	INSTALLS * THE FOLLOWING STAINLESS STEEL CABLE TIE CROSS-SECTION **	WEIGHT/PC	
		OZ	GRAMS
GS4MT-E	STD LH & H	15.52	440



NOTES, UNLESS OTHERWISE SPECIFIED:

RoHS COMPLIANT.

* THIS TOOL TIGHTENS PANDUIT STAINLESS
STEEL CABLE TIES AND CUTS OFF EXCESS
PORTION WHEN PRESET TENSION IS ATTAINED.

** CABLE TIE CROSS-SECTION CODE:
STD = STANDARD
LH = LIGHT HEAVY
H = HEAVY

DIMENSIONS IN BRACKETS ARE METRIC.

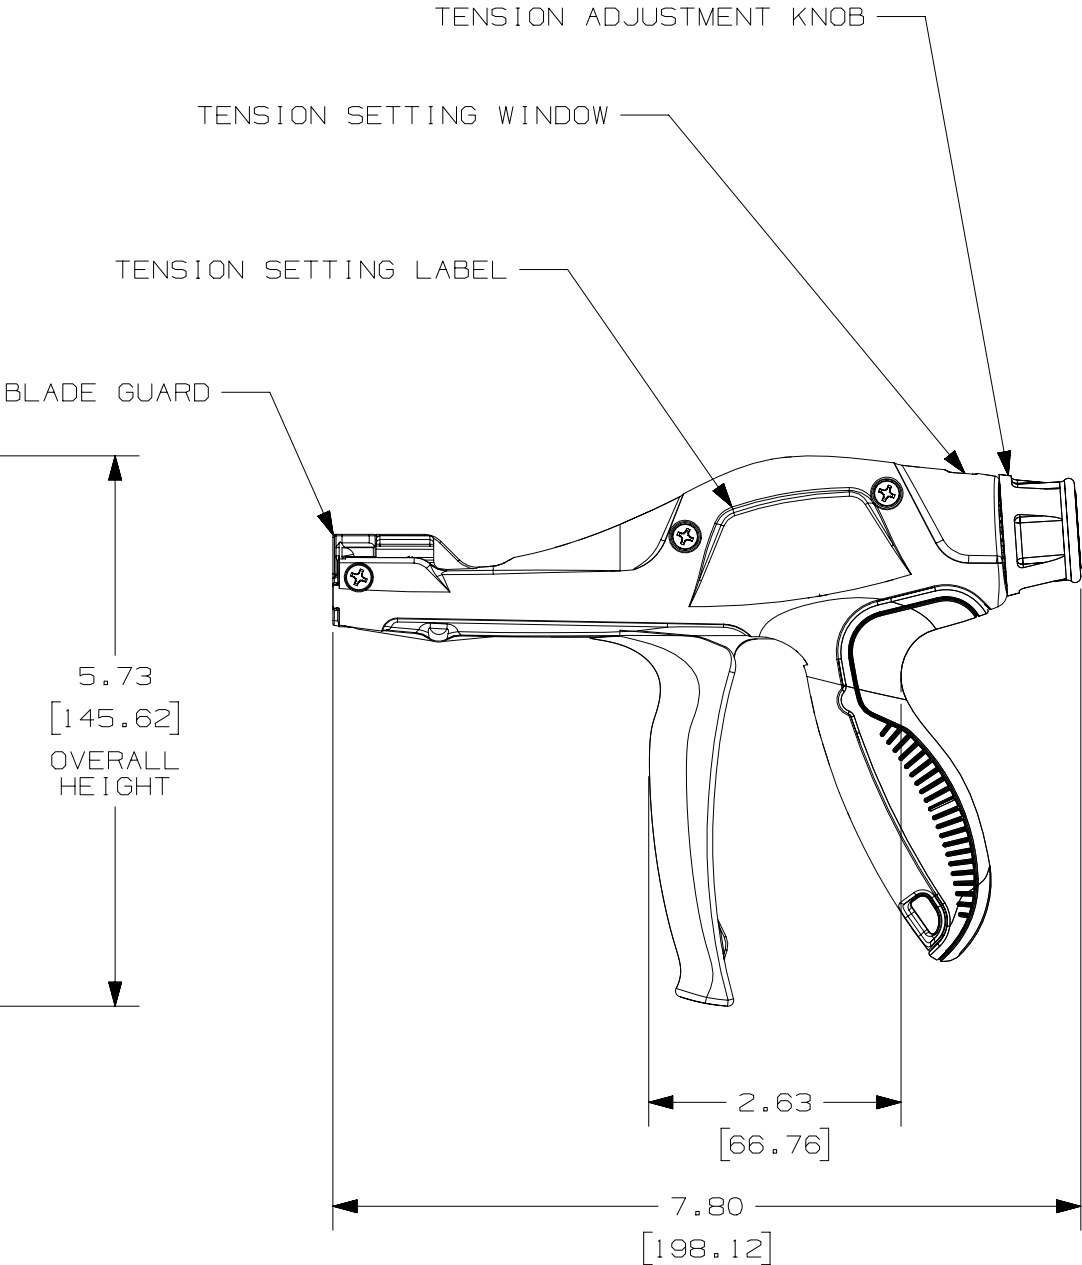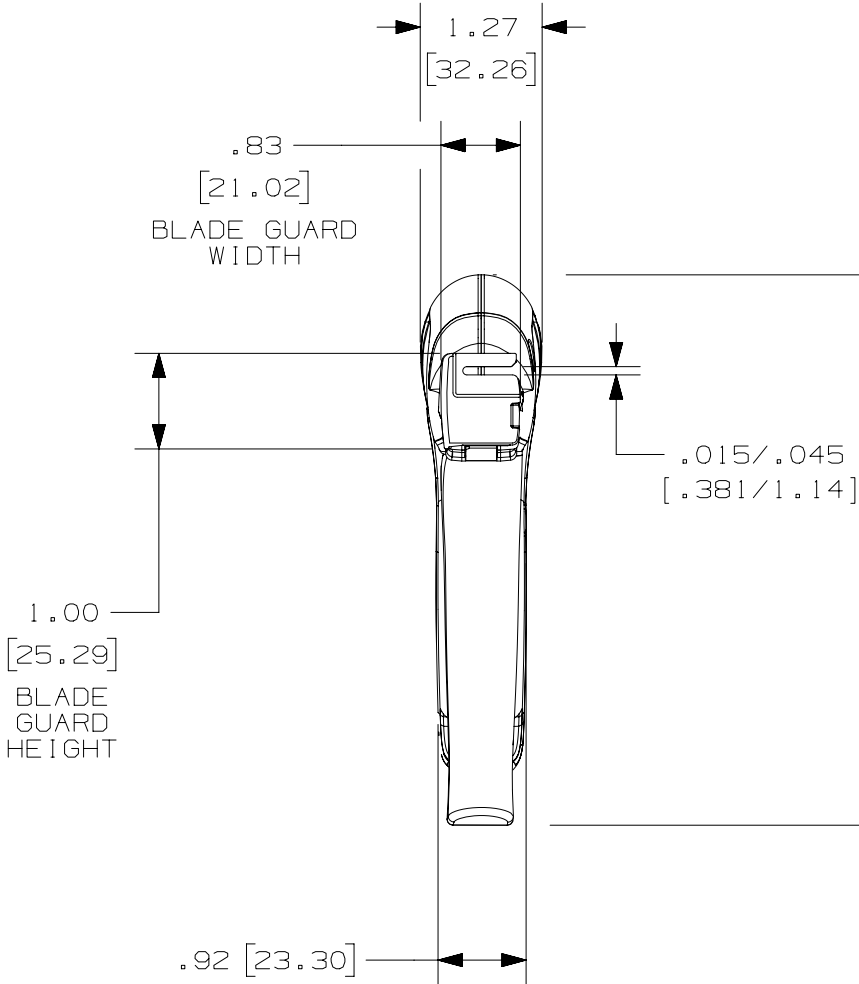

TENSION SETTINGS

TIE WIDTH	—	—
SETTING	STD 1-4	HVY 5-8

MS90387-3

							TITLE					
							CD, GS4MT-E					
							Customer/Military Drawing					
							ITEM REVISION NAME		R27580AA/02			
							DATASET FILE NAME		R27580AA_DS_TM27580B01/02A			
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:			
02	8-28-18	JEH	ABJ	JADE	UPDATED TENSION LABEL WITH MIL SPEC MS90387-3	037489	.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		-			
01	11-2-16	JEH	ABJ	JADE	RELEASED AT REV 01	4853	 THIRD ANGLE PROJECTION		DRAWING NUMBER: TM27580B01			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
							JEH	1-26-15	ABJ	1:2		B