




LOC	DIST	REVISONS				
		FR	LTR	DESCRIPTION	DATE	DWN APVD
		V		REVISED PER ECO-08-009474	7/21/2008	DW JL
		W		REVISED PER ECO-09-005412	10/9/2009	AEG WKE
		W1		REVISED PER ECO-10-000443	13JAN10	KK AEG

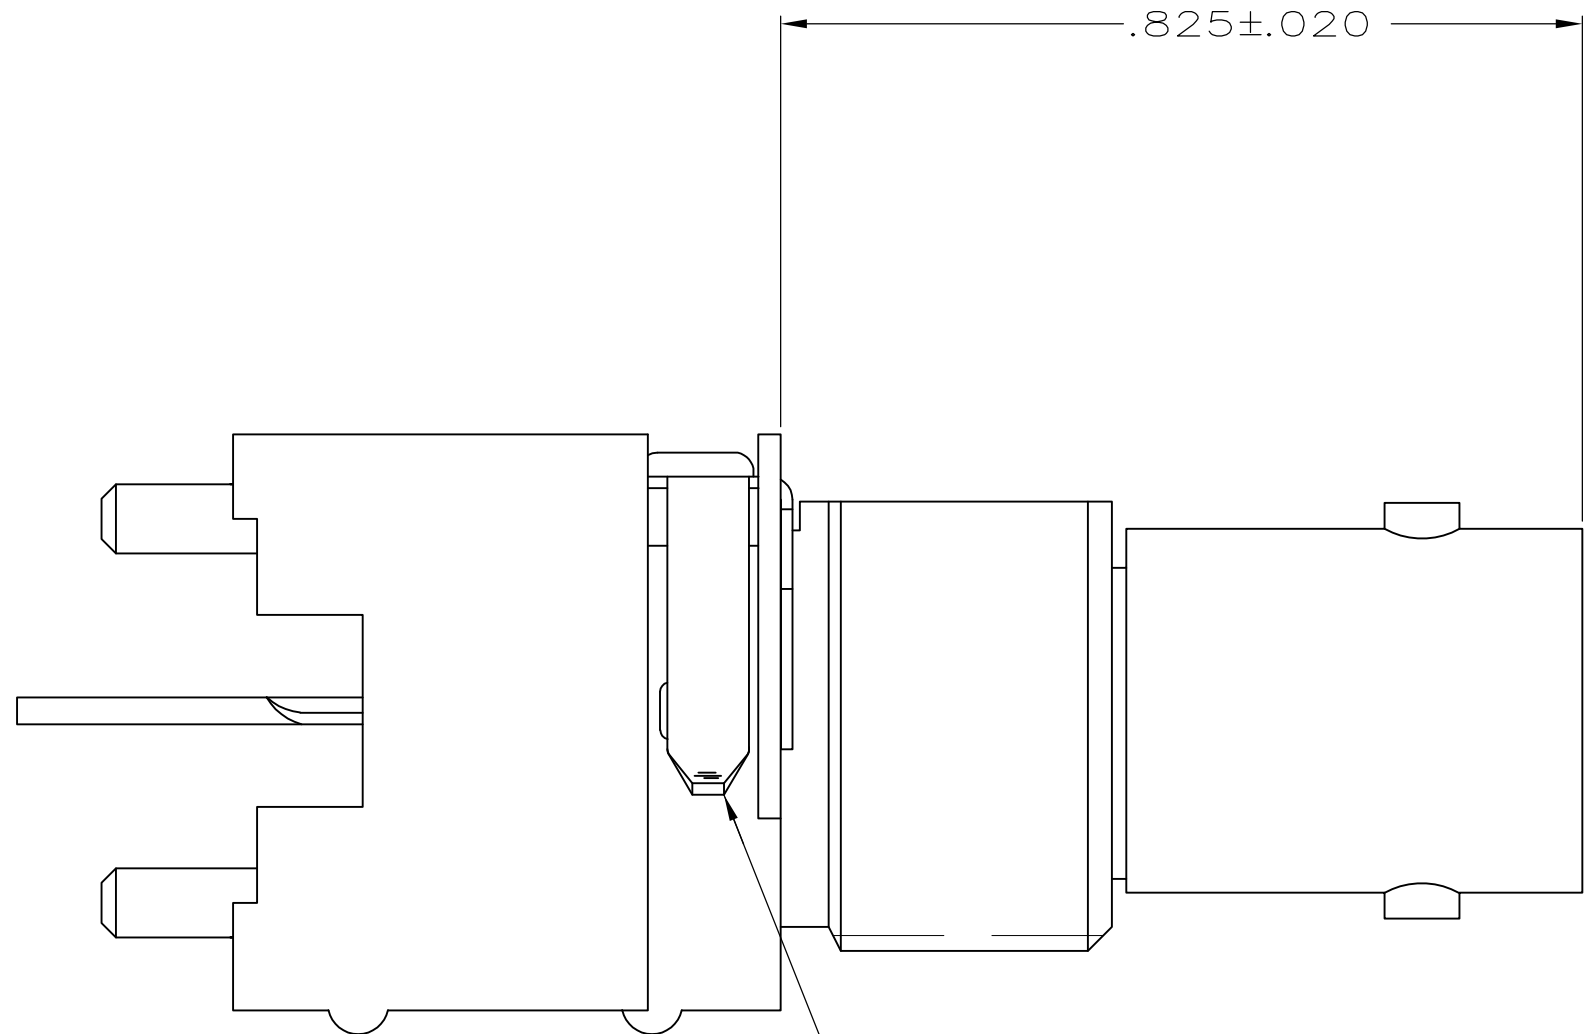


VIEW X

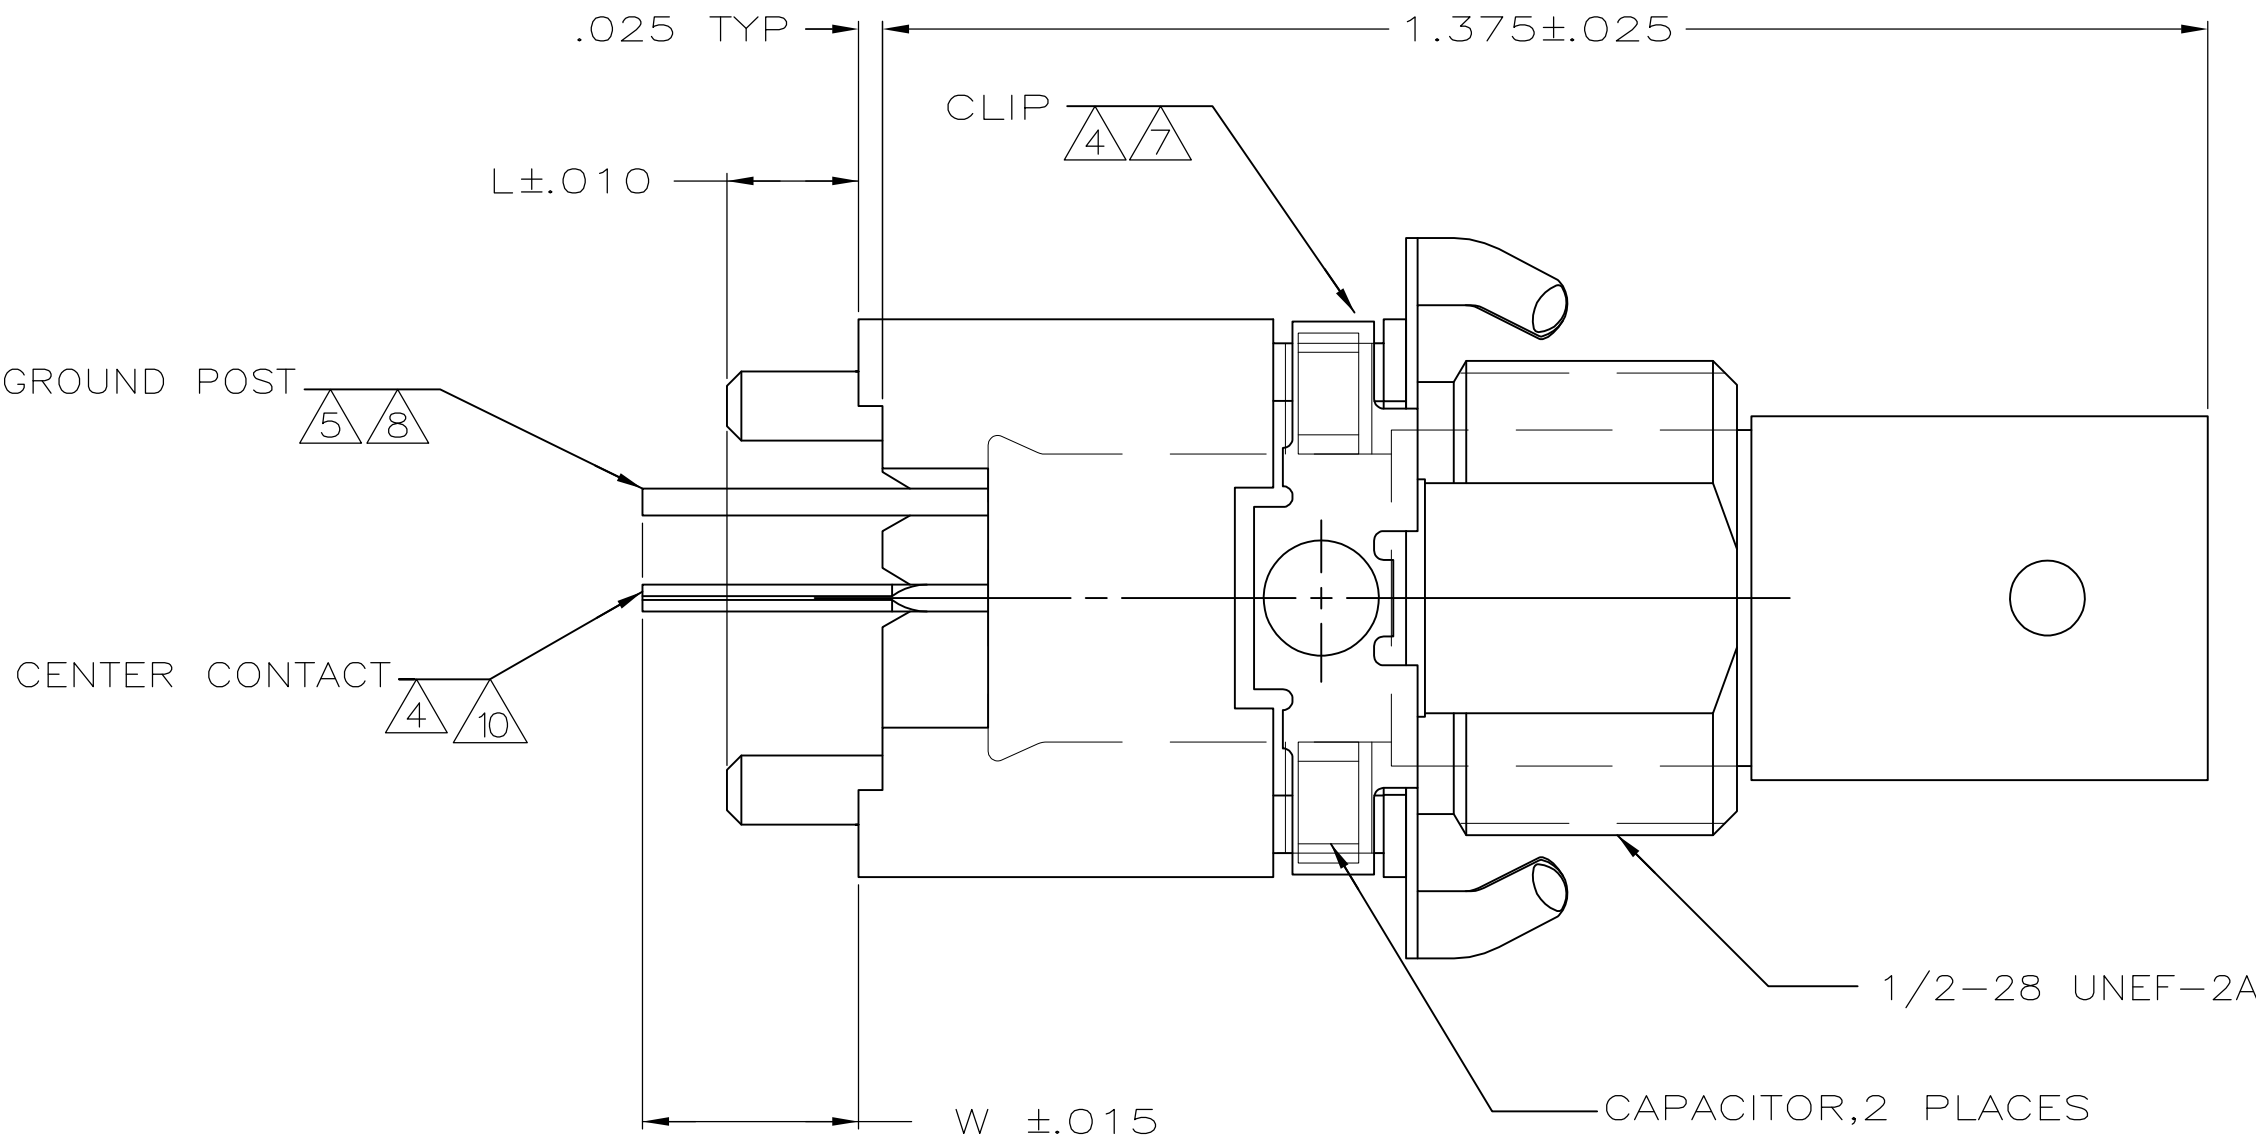



- 1 POLYESTER, PBT, BLACK, PER MIL-M-24519
- 2 POLYMETHYLPENTENE GENERAL PURPOSE
- 3 ZINC PER QQ-Z-363
- 4 PHOSPHOR BRONZE PER QQ-B-750
- 5 BRASS PER QQ-B-626
- 6 BRASS PER ASTM-B-453
- 7 NICKEL PL PER QQ-N-290
- 8 TIN PL PER ASTM-B-545
- 9 TIN PL PER ASTM-B-545
- 10 SELECTIVELY GOLD PLATED ON INTERFACE AREA PER: MIL-G-45204, .000030 THK, TIN PLATED ON SOLDER TAIL PER: ASTM-B-545, ALL OVER NICKEL PL PER: QQ-N-290
- 11 POLYESTER, PCT, BLACK, GENERAL PURPOSE
- 12 PTFE PER ASTM-D-1710
- 13 TRAY PACKAGING.

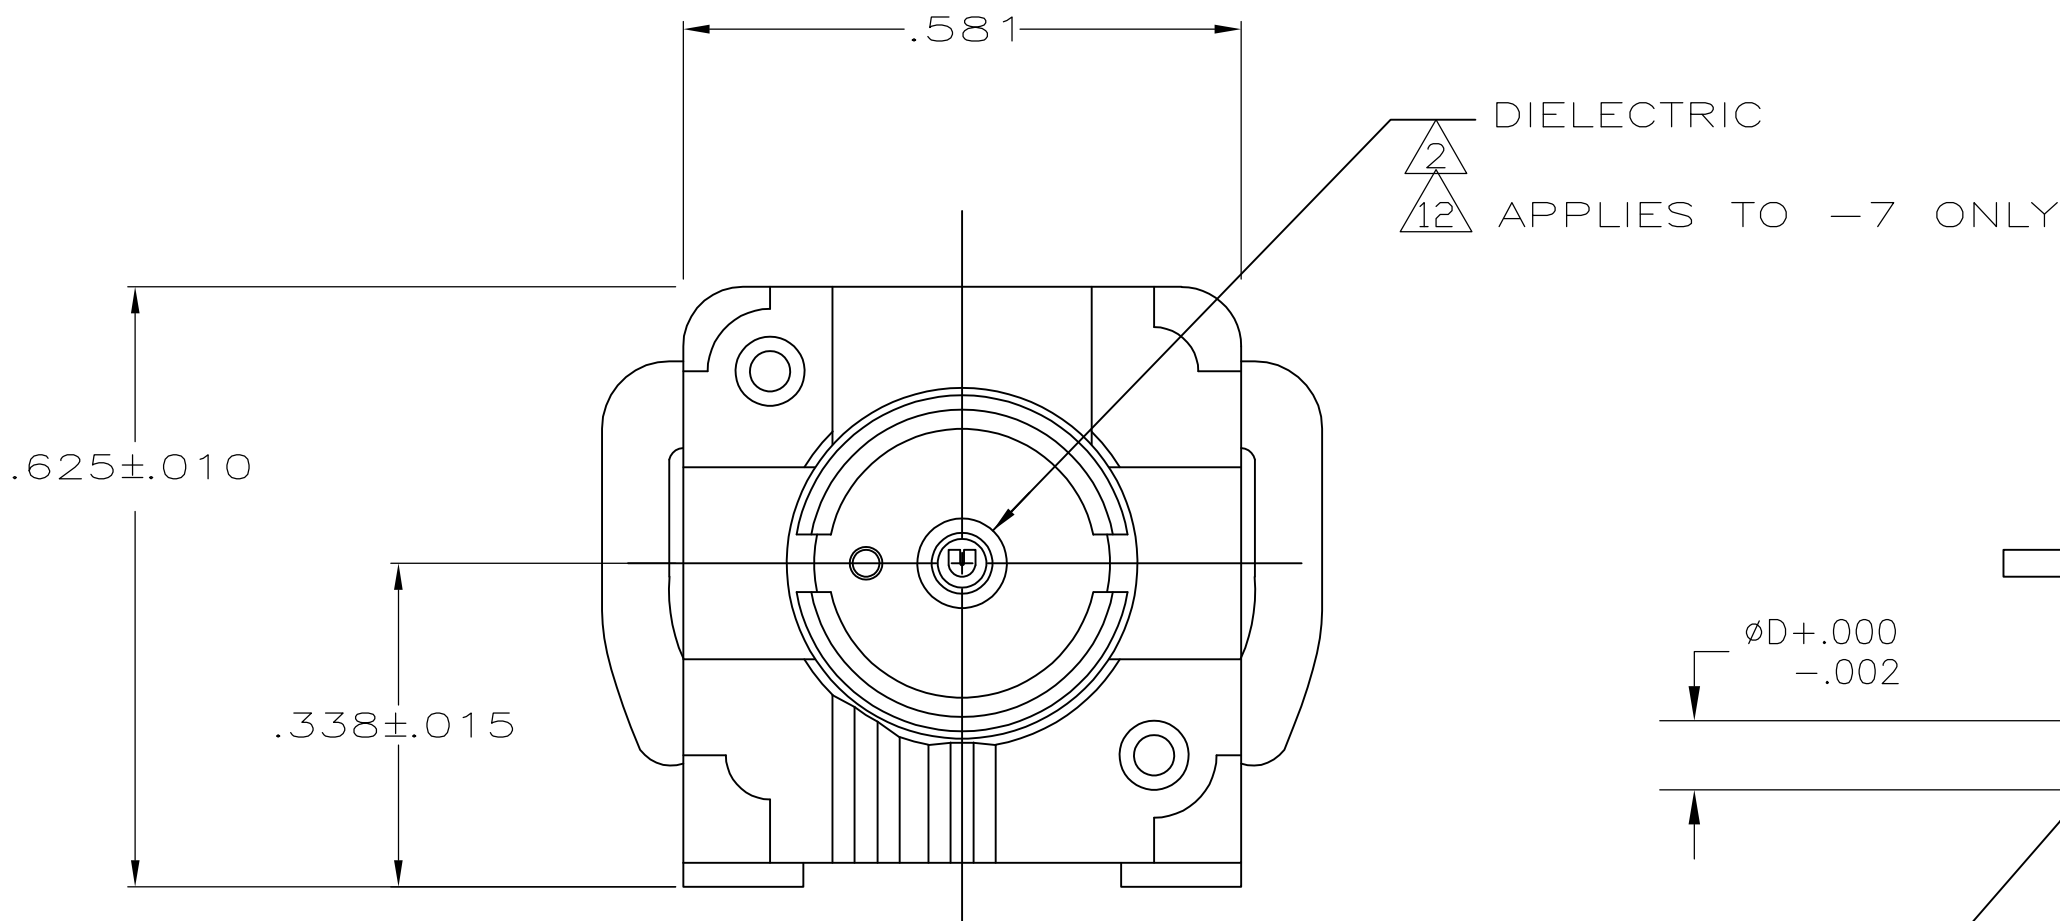


MOUNTING POST

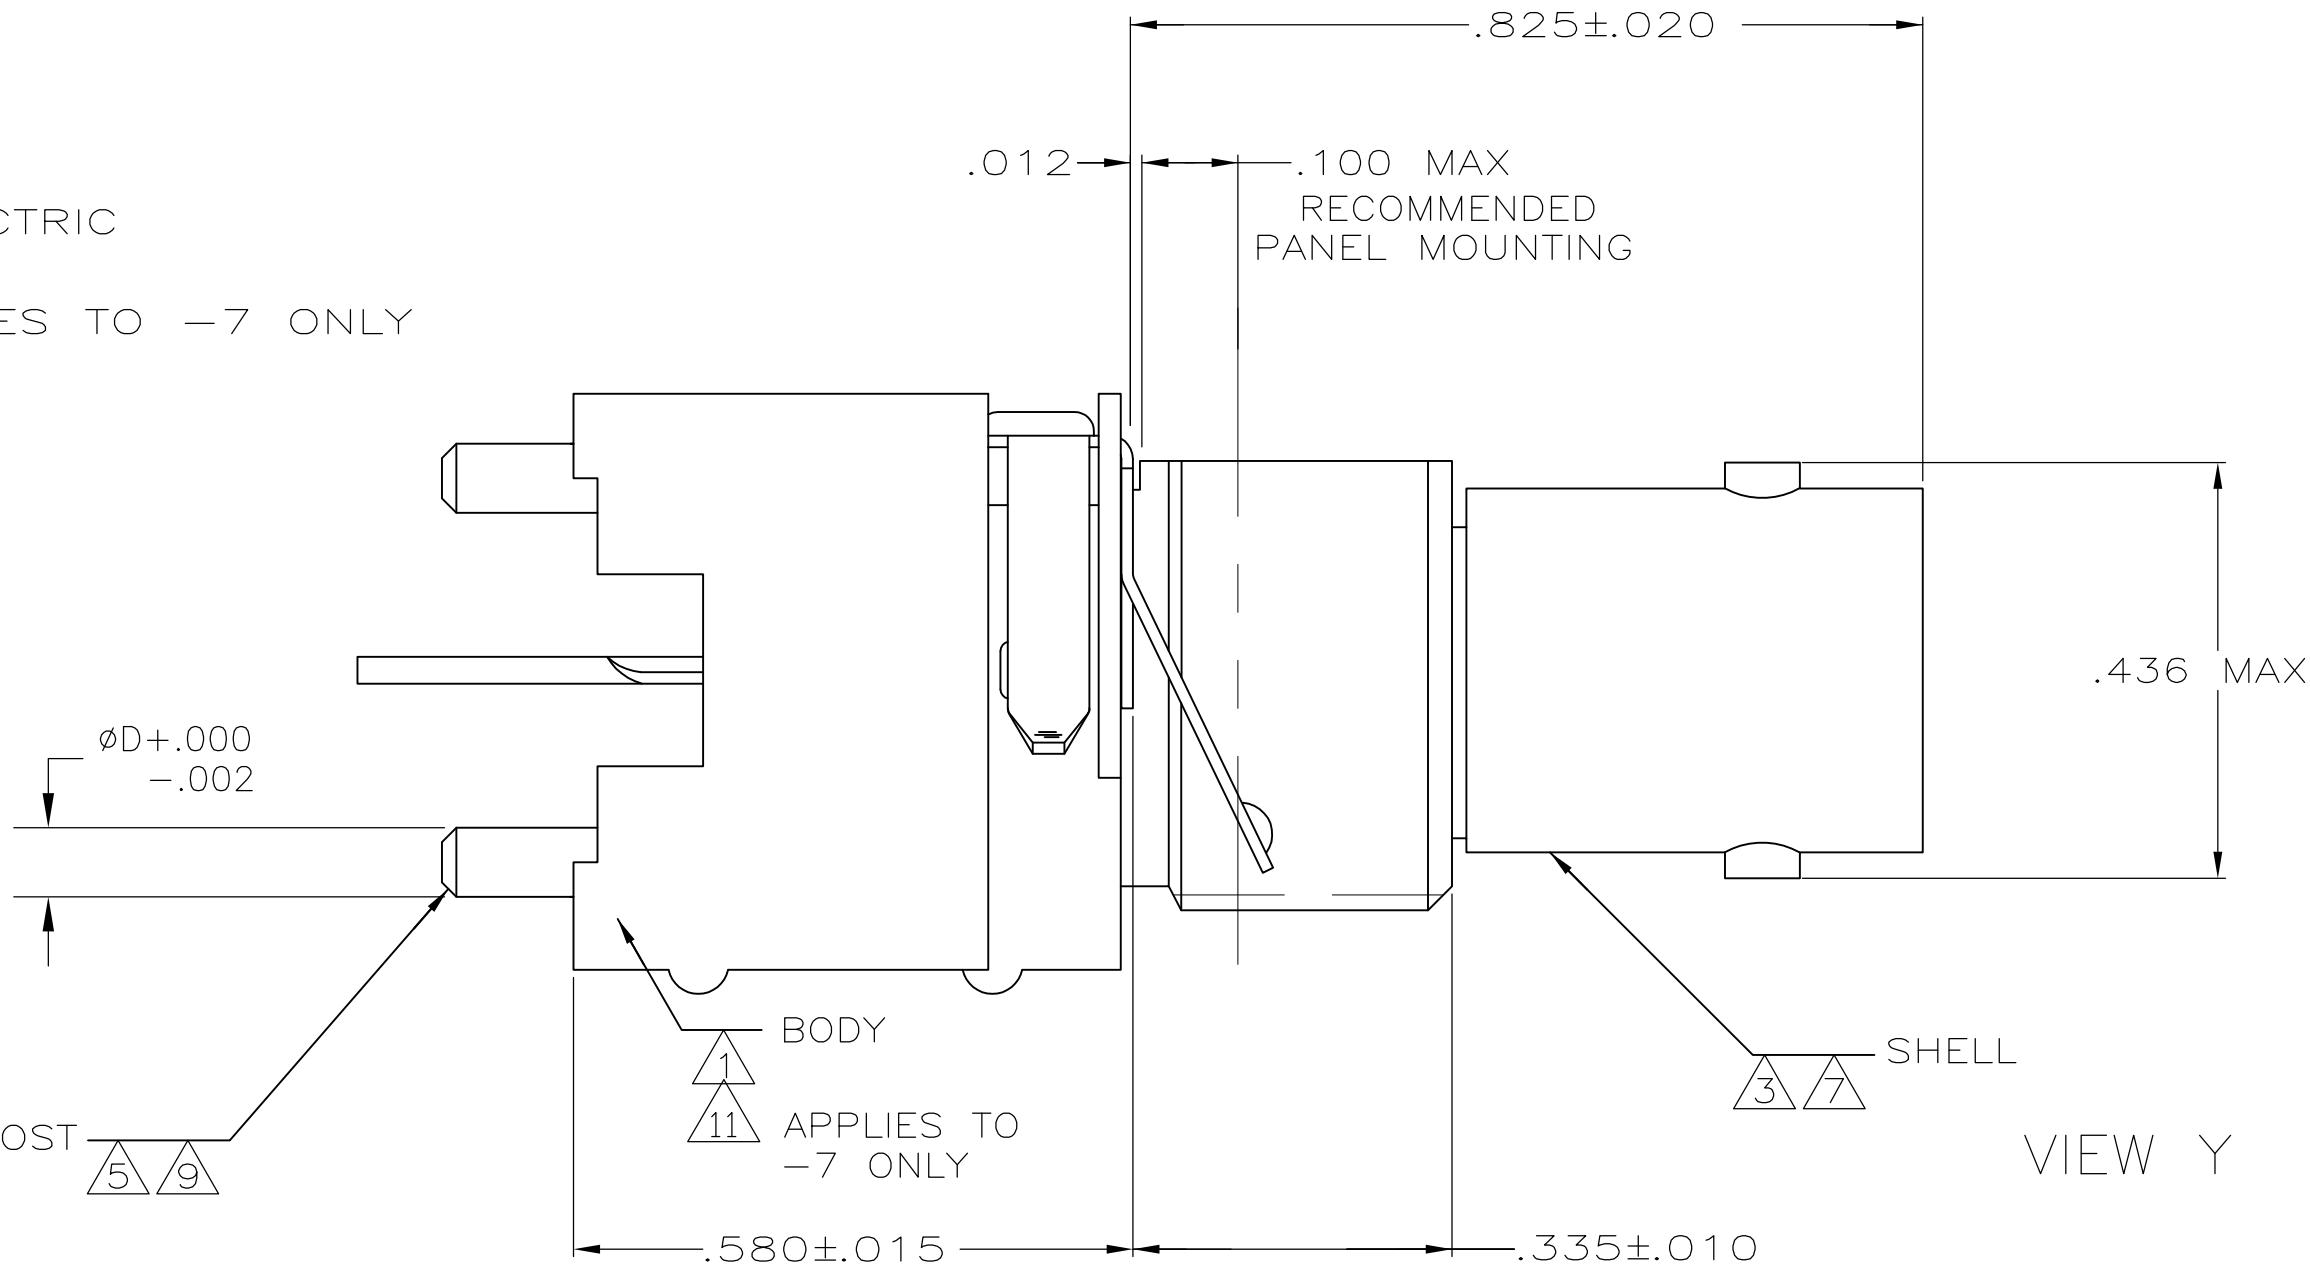

VIEW Y

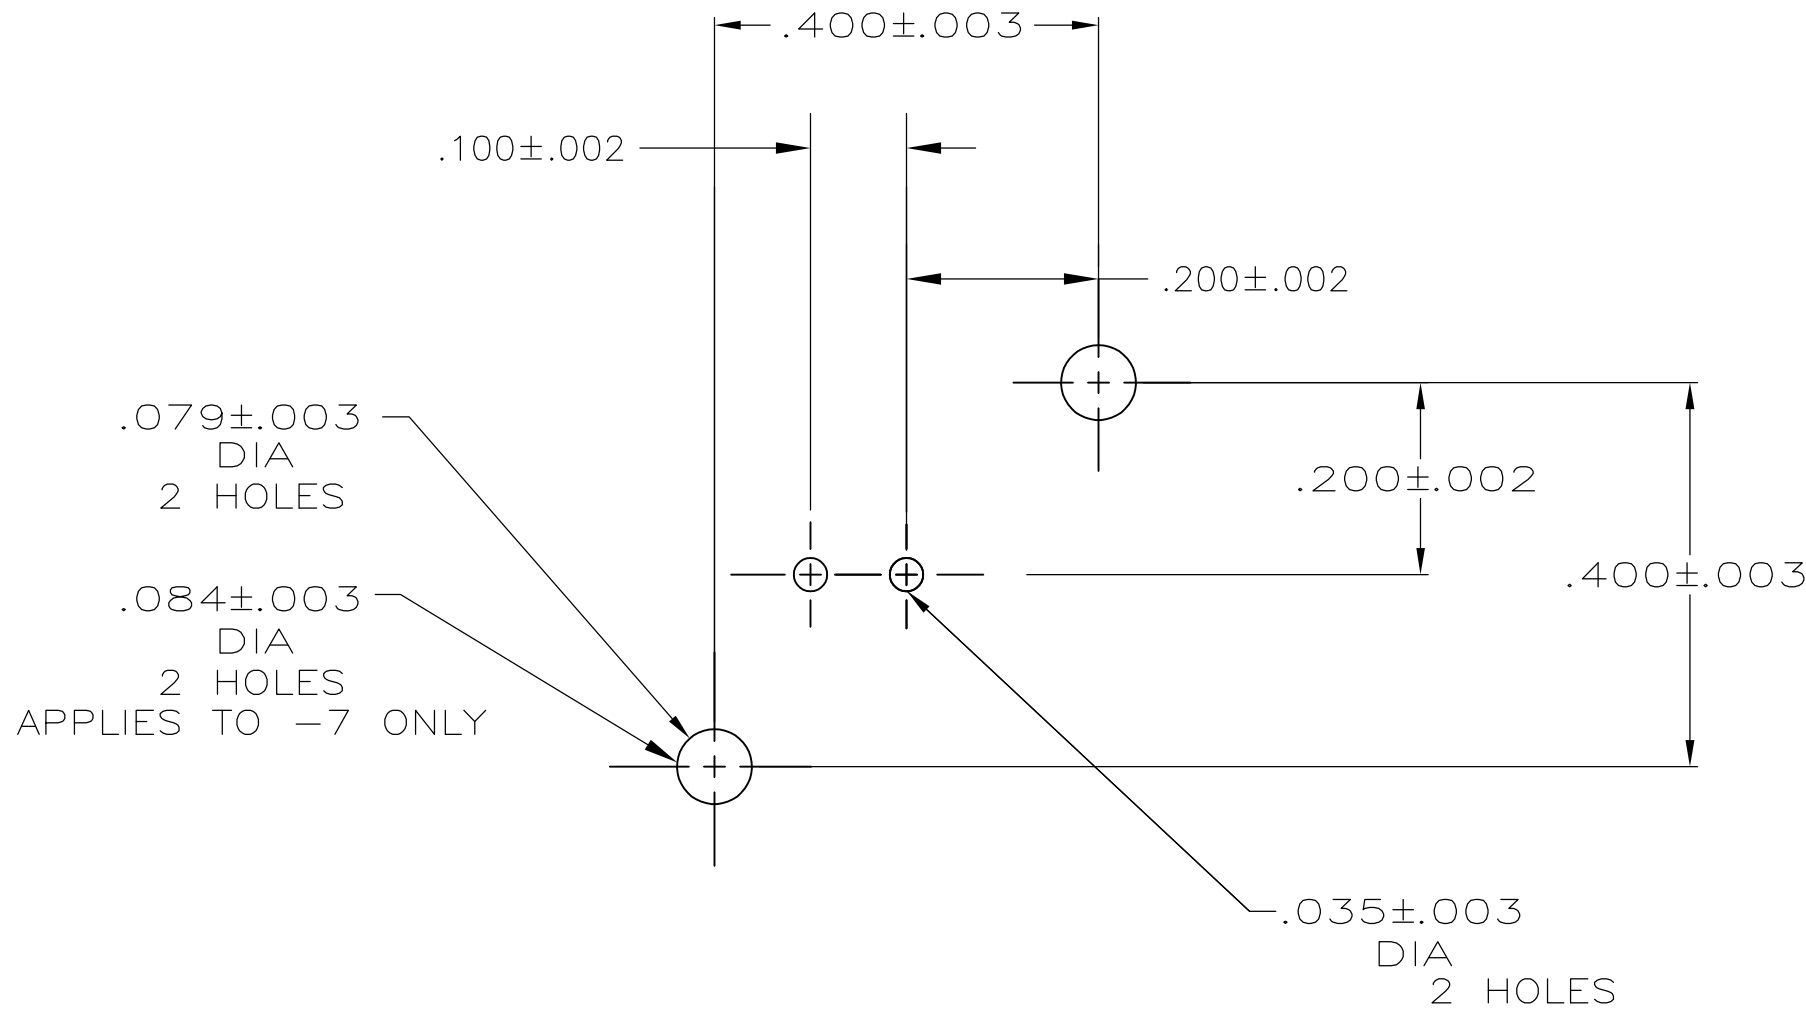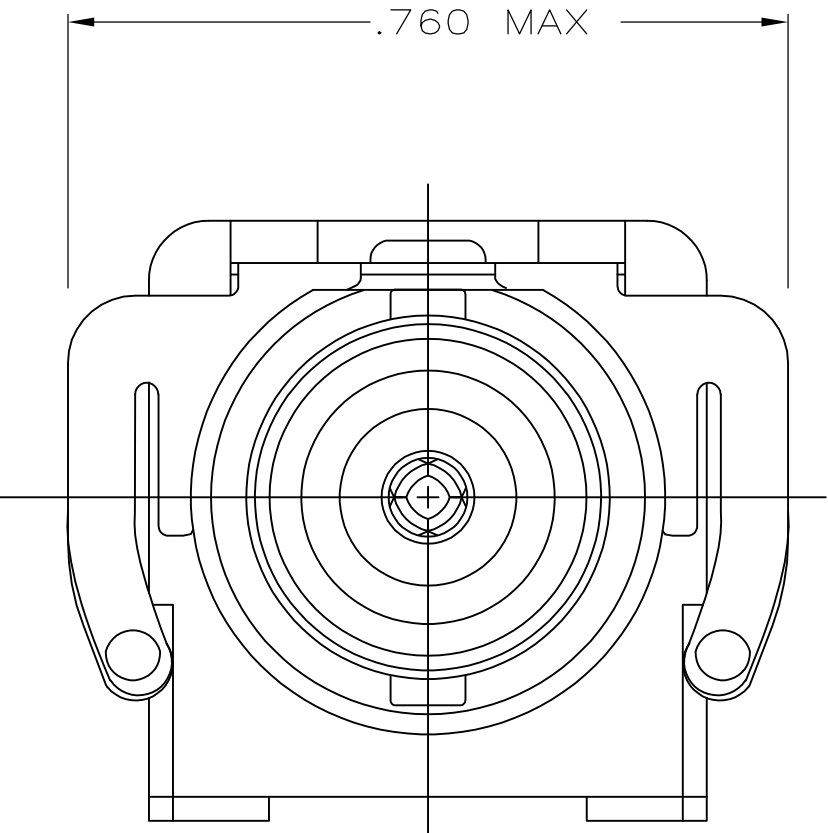

PCB CONFIGURATION

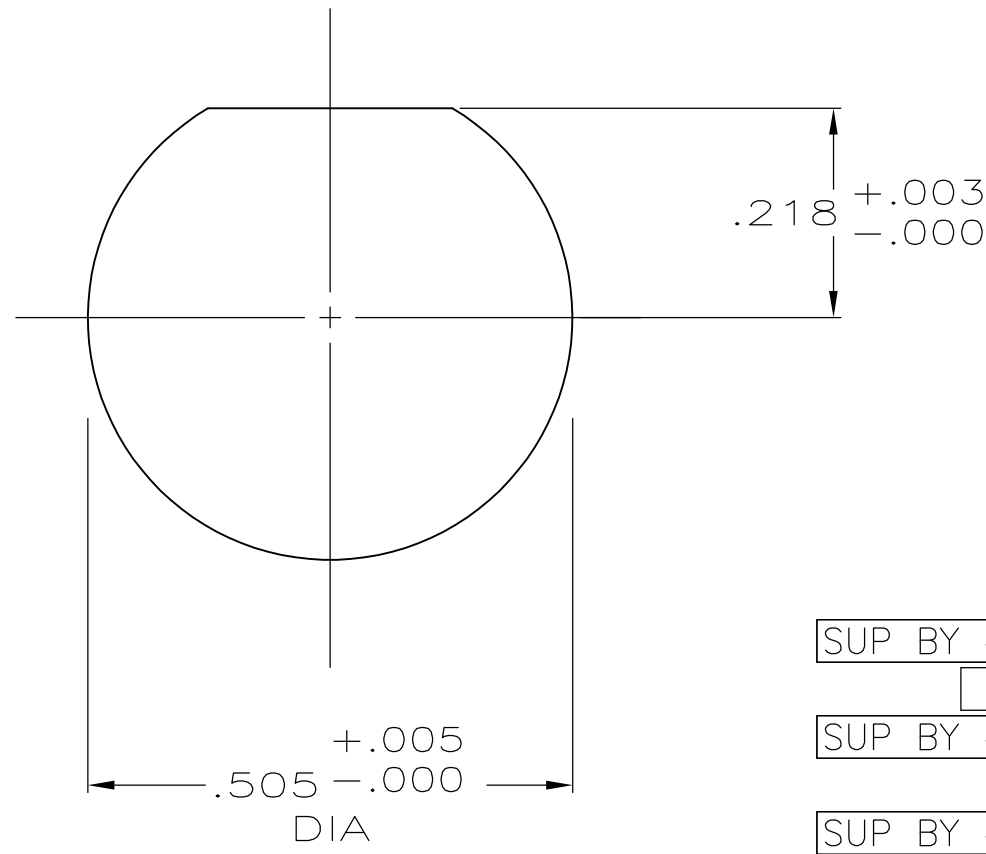

RECOMMENDED
PANEL CUTOUT

13	.169 +.008 -.007	.077	.137	Y	9400 pf, 1500 VDC	413476-7
SUP BY 413476-6	.225	.072	.158	Y	9400 pf, 1500 VDC	413476-6
OBSOLETE	.225	.072	.231	Y	9400 pf, 1500 VDC	413476-5
SUP BY 413476-2	.225	.072	.137	X	9400 pf, 1500 VDC	413476-4
SUP BY 413476-2	.225	.072	.137	X	9400 pf, 500 VDC	413476-3
SUP BY 413476-2	.225	.072	.137	Y	9400 pf, 1500 VDC	413476-2
SUP BY 413476-2	.225	.072	.137	Y	9400 pf, 500 VDC	413476-1
W		øD	L	CLIP VIEW	CAPACITANCE AND VOLTAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. KERLIN 5/3/90	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK R.E. RUTH 5/18/90	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	JACK, DECOUPLER, VERTICAL, PCB, SERIES BNC	
0 PLC ± -		108-1269	SIZE	
1 PLC ± -		APPLICATION SPEC	CAGE CODE	
2 PLC ± -		WEIGHT	DRAWING NO	
3 PLC ± .008		A1 00779	RESTRICTED TO	
4 PLC ± -		413476	SCALE	
ANGLES ± -		CUSTOMER DRAWING	SHEET	
1-6 11 12		5:1	1 OF 1	
7 8 9 10		REV	W1	