


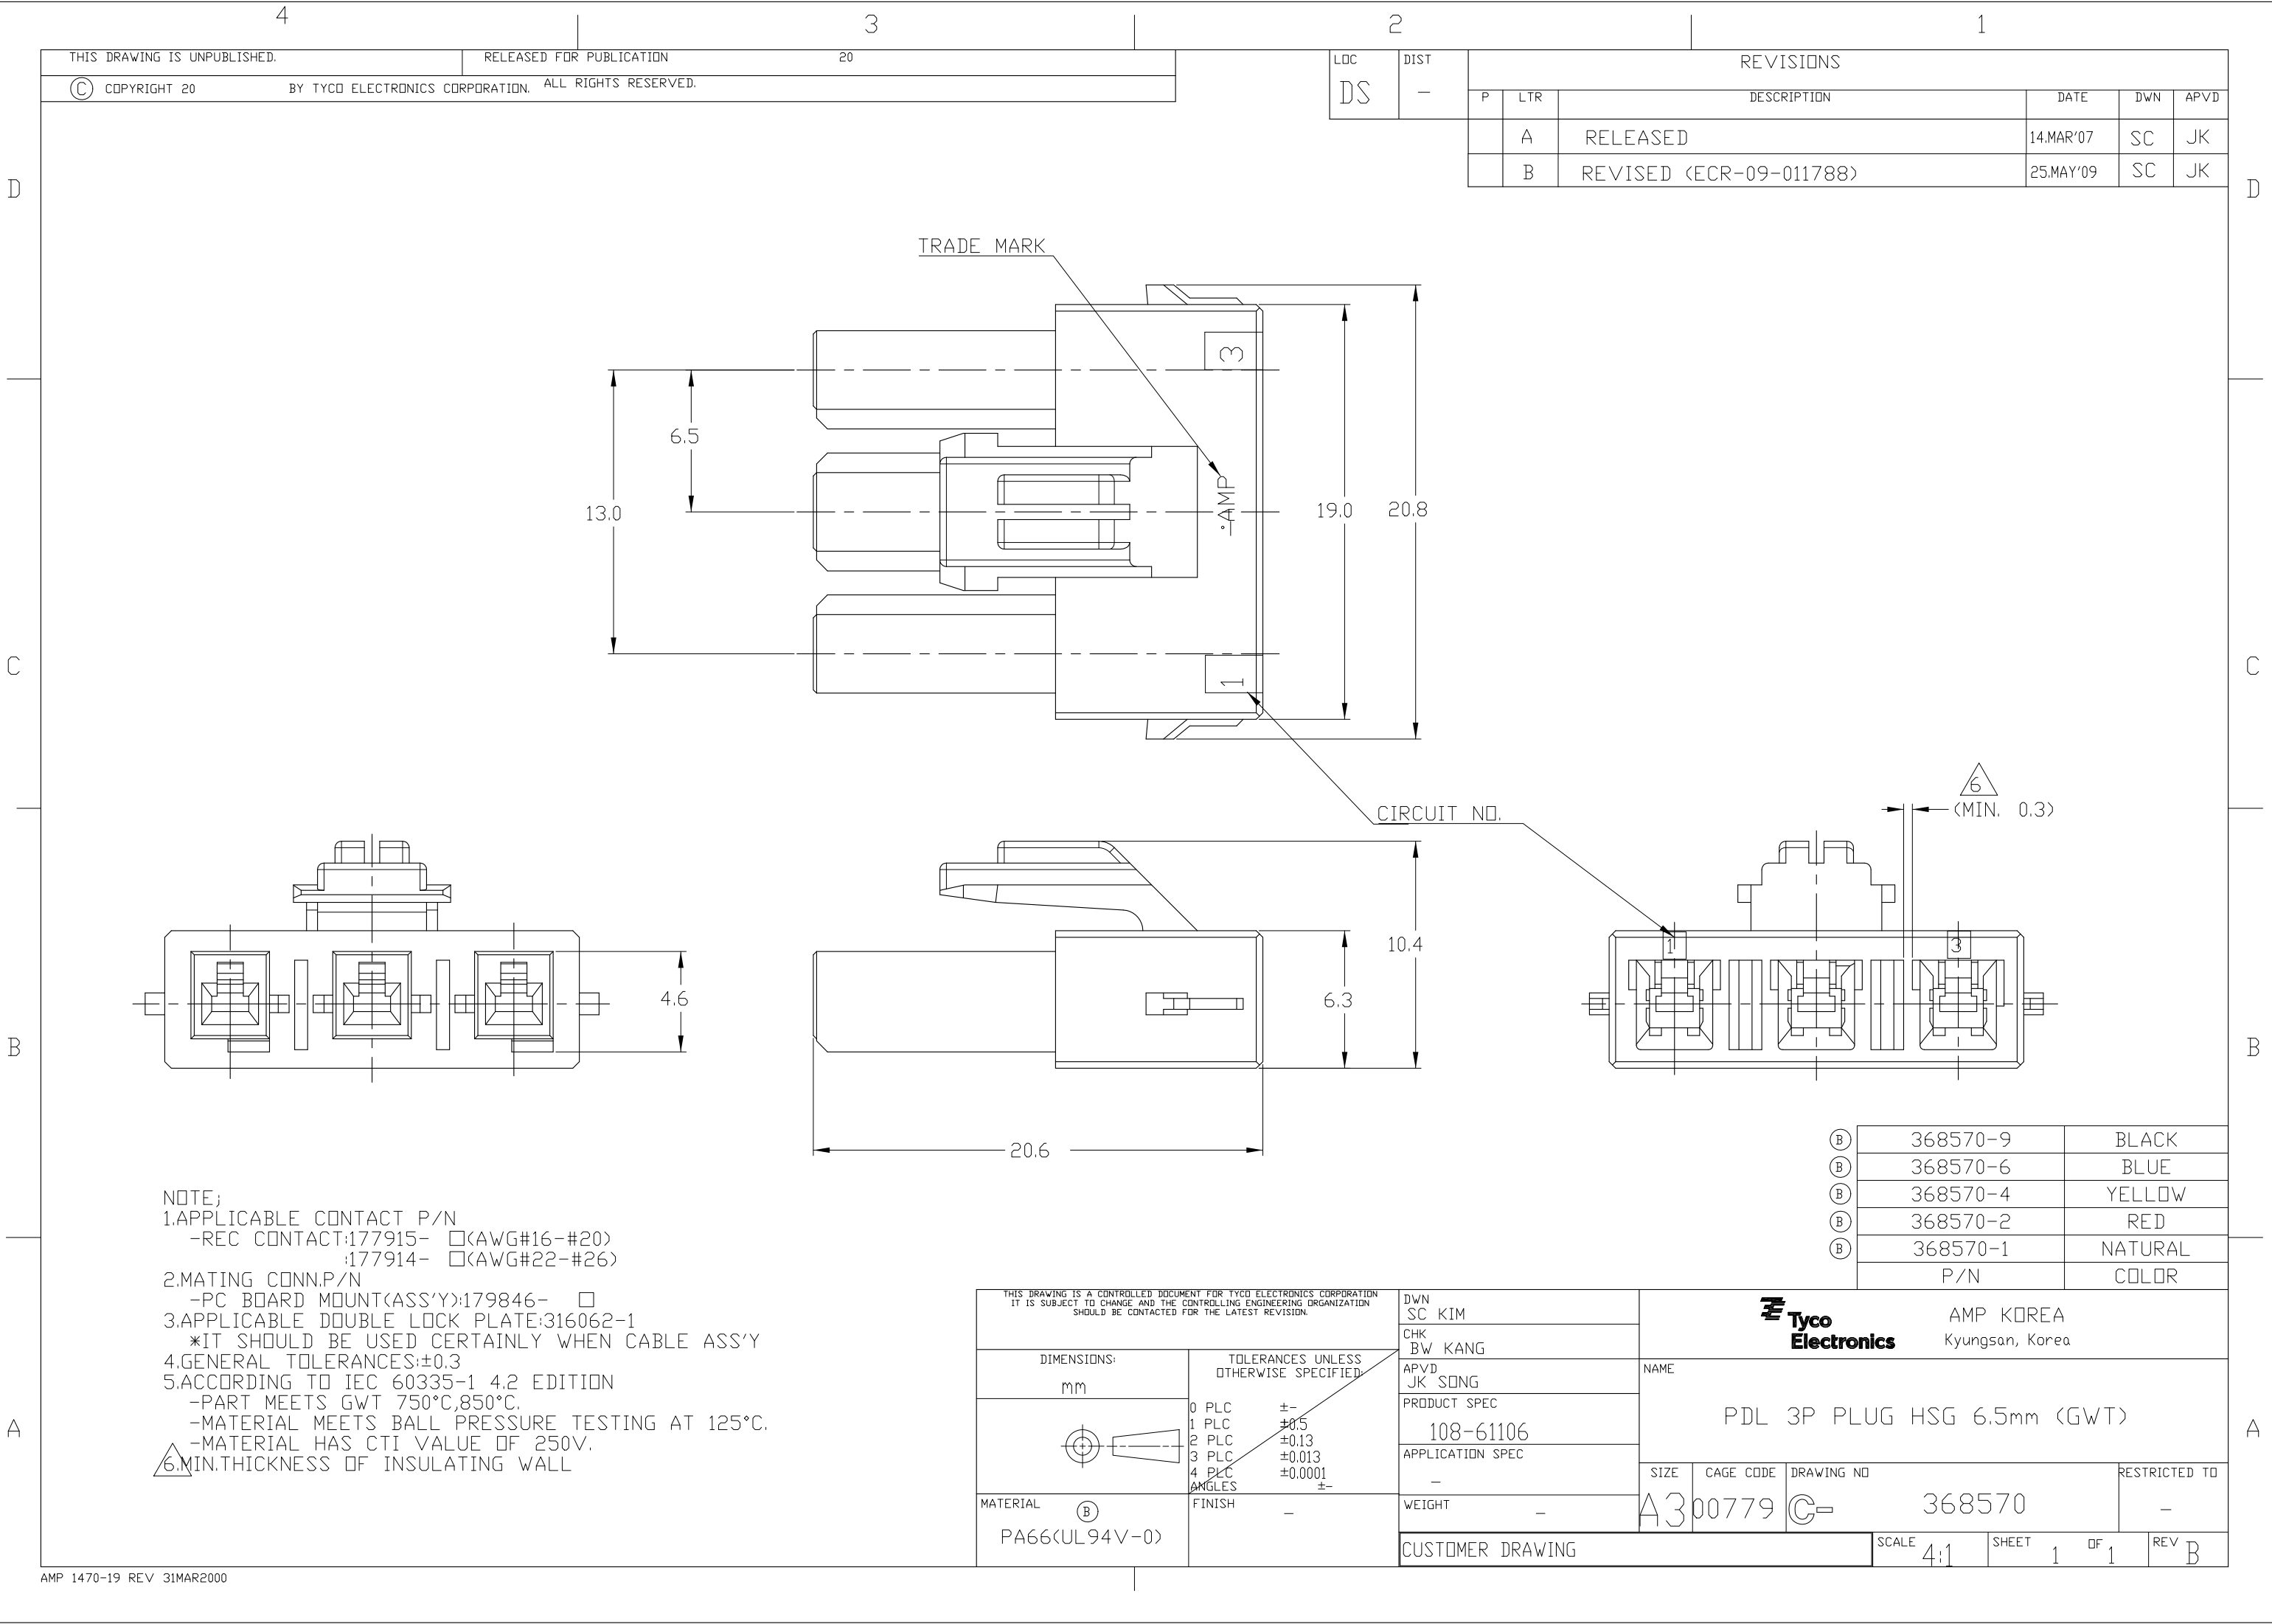


THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
20
COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC DS	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASED	14.MAR'07	SC	JK
			B	REVISED (ECR-09-011788)	25.MAY'09	SC	JK

NOTE;
1.APPLICABLE CONTACT P/N
-REC CONTACT:177915- □(AWG#16-#20)
:177914- □(AWG#22-#26)
2.MATING CONN.P/N
-PC BOARD MOUNT(ASS'Y):179846- □
3.APPLICABLE DOUBLE LOCK PLATE:316062-1
*IT SHOULD BE USED CERTAINLY WHEN CABLE ASS'Y
4.GENERAL TOLERANCES:±0.3
5.ACCORDING TO IEC 60335-1 4.2 EDITION
-PART MEETS GWT 750°C,850°C.
-MATERIAL MEETS BALL PRESSURE TESTING AT 125°C.
-MATERIAL HAS CTI VALUE OF 250V.
6.MIN.THICKNESS OF INSULATING WALL

③	368570-9	BLACK
③	368570-6	BLUE
③	368570-4	YELLOW
③	368570-2	RED
③	368570-1	NATURAL
	P/N	COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN SC KIM		 AMP KOREA Kyungsan, Korea						
DIMENSIONS: mm		CHK BW KANG								
		APVD JK SONG		NAME PDL 3P PLUG HSG 6.5mm (GWT)						
		PRODUCT SPEC 108-61106								
		APPLICATION SPEC -								
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±-		WEIGHT -		SIZE A3	CAGE CODE 00779	DRAWING NO 368570	RESTRICTED TO -			
MATERIAL ③ PA66(UL94V-0)		FINISH -		CUSTOMER DRAWING				SCALE 4:1	SHEET 1 OF 1	REV B