


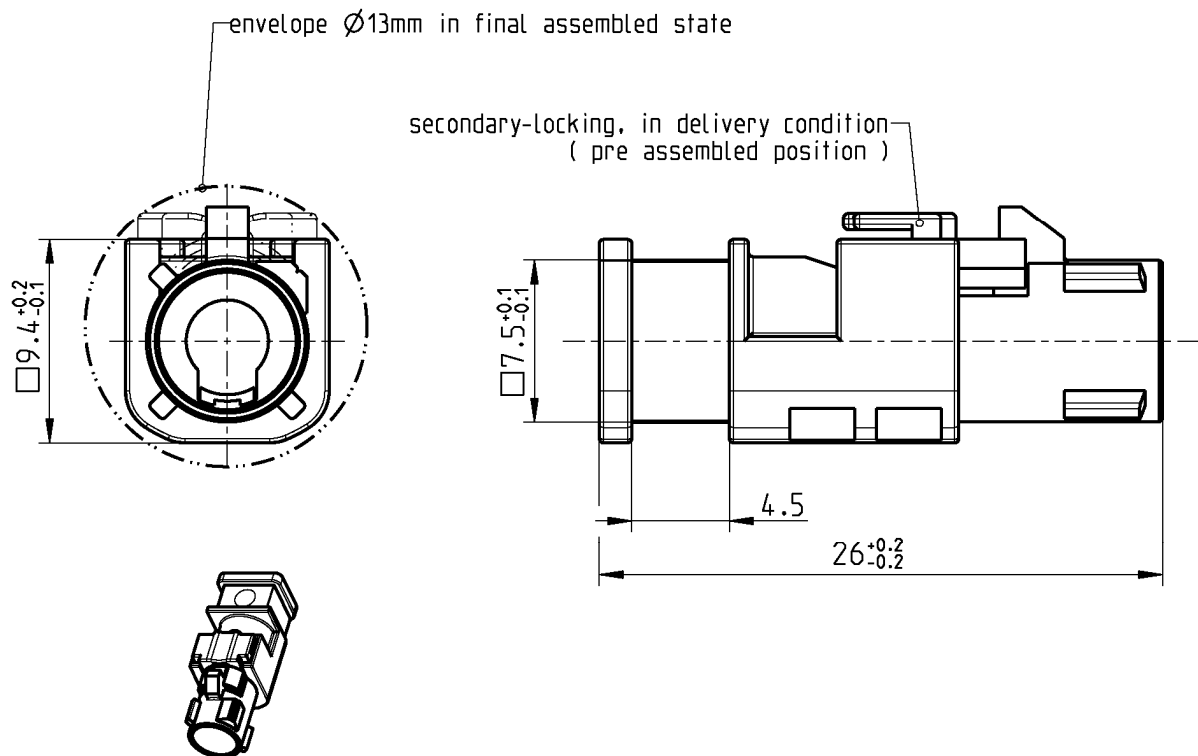

All dimensions are in mm; tolerances according to ISO 2768 m-H  
Y = Part number has to be accomplished by codification

### Interface and coding

According to DIN 72594-1

### Material

|                |     |
|----------------|-----|
| Housing        | PBT |
| Secondary Lock | PBT |

### Mechanical data

|                                |         |
|--------------------------------|---------|
| Mating cycles                  | ≥ 25    |
| Retention force latch          | ≥ 110 N |
| Retention force primary lock   | ≥ 80 N  |
| Retention force secondary lock | ≥ 60 N  |
| Coding efficiency              | ≥ 40 N  |

# TECHNICAL DATA SHEET

**Rosenberger®**

FAKRA - HF PLASTIC HOUSING

**59Z064-000-Y**

## Environmental data

|                                |                        |
|--------------------------------|------------------------|
| Temperature range              | -40°C to +105°C        |
| Thermal shock                  | DIN 72594-2 clause 6.2 |
| Temperature and humidity       | DIN 72594-2 clause 6.3 |
| Vibration and mechanical shock | DIN 72594-2 clause 6.1 |
| Dry heat                       | DIN 72594-2 clause 6.4 |
| 2002/95/EC (RoHS)              | compliant              |

## Application

Applicable e.g. for following connectors: 59S10E-1xx \*, 59S10L-1xx \*, 59S10O-1xx \*, 59S16A-1xx\*

\* xx -for all available cable variations

## Packing

|          |                                            |
|----------|--------------------------------------------|
| Standard | 500 pcs in box; 2000 pcs in returnable box |
| Weight   | 1.07 g/pce                                 |

## Coding

Part Number has to be accomplished by codification

| Coding                                                                              |   | Color          | RAL       | Part-Number    |
|-------------------------------------------------------------------------------------|---|----------------|-----------|----------------|
|   | A | black          | sim. 9005 | 59Z064-000_A   |
|  | B | white          | sim. 9001 | 59Z064-000_B   |
|  | C | blue           | sim. 5005 | 59Z064-000_C   |
|  | D | bordeauxviolet | sim. 4004 | 59Z064-000_D   |
|  | E | green          | sim. 6002 | 59Z064-000_E   |
|  | F | brown          | sim. 8011 | 59Z064-000_F   |
|  | G | grey           | sim. 7031 | 59Z064-000_G   |
|  | H | violet         | sim. 4003 | 59Z064-000_H   |
|  | I | beige          | sim. 1001 | 59Z064-000_I   |
|  | K | curry          | sim. 1027 | 59Z064-000_K   |
|  | L | Carmine red    | sim. 3002 | 59Z064-000_L   |
|  | M | pastel orange  | sim. 2003 | 59Z064-000_M   |
|  | N | pastel green   | sim. 6019 | 59Z064-000_N   |
|  | Z | waterblue      | sim. 5021 | 59Z064-000_Z   |
|                                                                                     |   | traffic purple | sim. 4006 | secondary lock |

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

| Draft                                                                                                                                                  | Date     | Approved | Date     | Rev.                                                                                                               | Engineering change number | Name             | Date          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|--------------------------------------------------------------------------------------------------------------------|---------------------------|------------------|---------------|
| Martin Zebhauser                                                                                                                                       | 01/09/04 | Lankes   | 27/07/10 | f00                                                                                                                | 10-0551                   | Matthias Brixner | 27/07/10      |
| Rosenberger Hochfrequenztechnik GmbH & Co. KG<br>P.O.Box 1260 D-84526 Tittmoning Germany<br><a href="http://www.rosenberger.de">www.rosenberger.de</a> |          |          |          | Tel.: +49 8684 18-0<br>Fax: +49 8684 18-499<br>email: <a href="mailto:info@rosenberger.de">info@rosenberger.de</a> |                           |                  | Page<br>2 / 2 |