


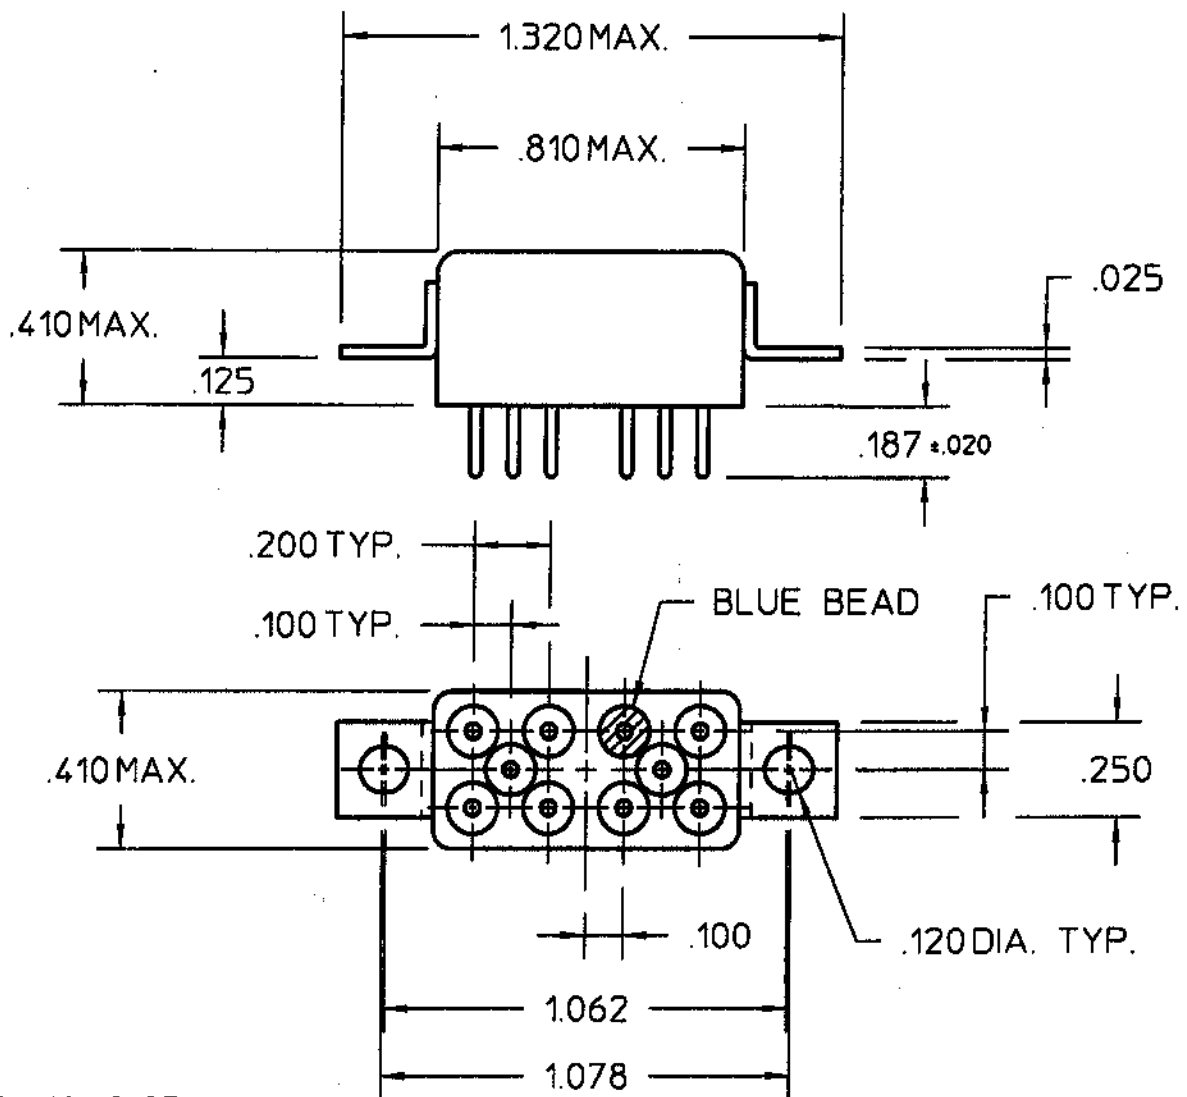

REV. 2 10/19/95

COIL: 12.0 VDC NOMINAL

CUSTOMER DATA SHEET

WINDING #1

WINDING #2


254 OHMS ± 10%

254 OHMS ± 10%

6.0 VDC MUST OPERATE

6.0 VDC MUST OPERATE

LAST ENERG. 7

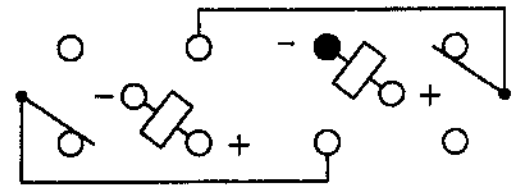

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: SET/RESET TIME 4 MS MAX.

CONTACT BOUNCE 2 MS MAX.

(DEVIATION TO 1 MS MAX.)

CONTACT RATING: 2 AMPS / 30 VDC

DR. R.B. 2/19/92 CK.

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. HI-G
CUST. NO. 2KL-2C-112

TYPE "LS" RELAY

LS-9024

REVISION