


AFCI PART NO.

10123475-R0003YYLF

WIRING LIST			
P1		P2	
1	—	1	
2	—	2	
3	—	3	
	—		
12	—	12	
13	—	13	
14	—	14	

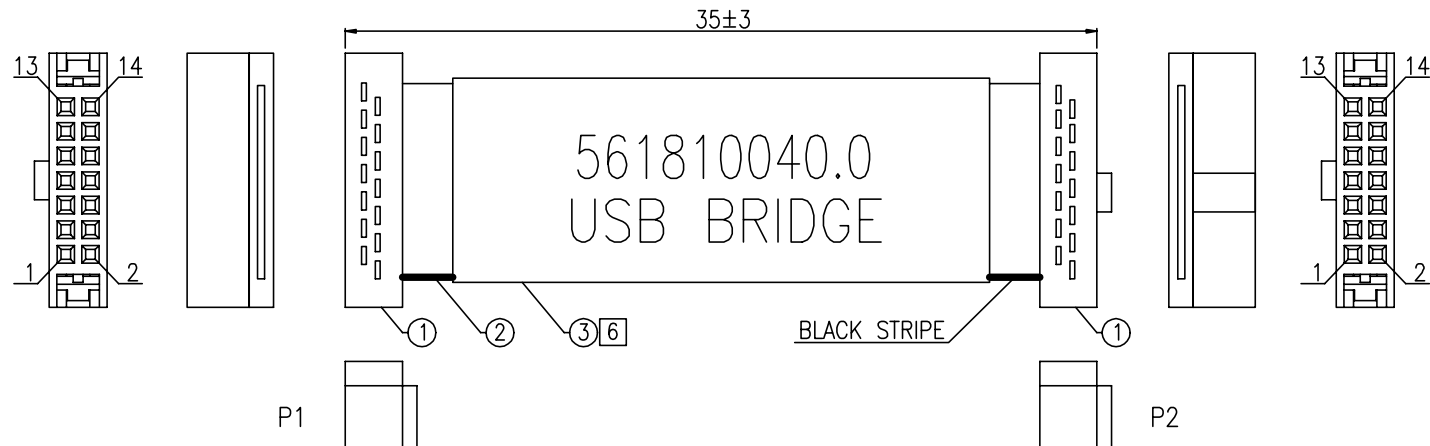

NOTES:

1. MATERIAL: SEE BOM ON SHEET 1.
2. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.
3. ALL CABLE ASSEMBLIES SHALL BE TESTED 100% FOR CONTINUITY AS DEFINED IN WIRING LIST.
4. UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE TESTED:
HI-POT: DC 300V/10ms
DIELECTRIC RESISTANCE: 10M Ohms MIN.
CONNECTION RESISTANCE: 4 Ohms MAX.
5. LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

 LABEL SHOULD BE PRINTED WITH BLACK TEXT AS SHOW BELOW:

561810040.0
USB BRIDGE

	1	EA	ADHESIVE LABEL: W=25mm, COLOR:WHITE, PRINT BLACK										3								
	A/R	FT	FLAT CABLE: UL2678, 0.635PITCH, 30AWG, 14PIN, COLOR:GRAY										2								
	2	EA	IDC CONNECTOR: 1.27PITCH, 2X7PIN, 10u" Au PLATING, COLOR:BLACK										1								
Q'TY		UNIT		DESCRIPTION										ITEM							
mat'l. code				surface ISO 1302 		tolerance ISO 406 ISO 1101		projection 		product family Cable Assembly											
ltr		ecn no		dr		date		tolerances unless otherwise specified				title									
A		/		Harry		03/08'13		angles				linear									
B		N-24535		Carl		07/20'16						MM									
												scale N/A									
								dr		Carl Wang		07/20'16				dwg no		sheet 1 of 1		size	
								enrg		Carl Wang		07/20'16				10123475		A3			
								chr		Caspar Lin		07/20'16									
								appd		Caspar Lin		07/20'16									
sheet index		revision sheet		B		1															