

USB female insert - CUC-V06-F1PGY-UBB/UBAB - 1411905

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



USB socket insert, 4-pos., USB socket type A to USB socket type B, socket type B to panel mounting frame side, for the Freenet system in the panel mounting frame, IP20 terminal outlet, 19" patch panel, and service interface

Product Features



Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	40.0 GRM
Custom tariff number	85366990
Country of origin	Germany

Technical data

Mechanical characteristics

Number of positions	4
Connection profile	USB
Connection method	Socket, type B
Color	gray

Ambient conditions

Ambient temperature (operation)	-15 °C ... 65 °C
Degree of protection	IP67

Material data

Inflammability class according to UL 94	V0
Housing material	PC
Contact carrier material	Thermoplastic
Contact material	Copper alloy
Contact surface material	Gold over nickel

USB female insert - CUC-V06-F1PGY-UBB/UBAB - 1411905

Technical data

Electrical characteristics

Rated voltage (III/3)	30 V
Rated current	1 A
Transmission characteristics (category)	USB 2.0

Classifications

eCl@ss

eCl@ss 5.1	27260701
eCl@ss 6.0	19150701

ETIM

ETIM 4.0	EC001121
ETIM 5.0	EC001121

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted


Approval details

EAC


Drawings

USB female insert - CUC-V06-F1PGY-UBB/UBAB - 1411905

Dimensional drawing




Schematic diagram



Pin assignment socket USB, type A


Panel cutout

Schematic diagram



Pin assignment socket USB, type B

Dimensional drawing

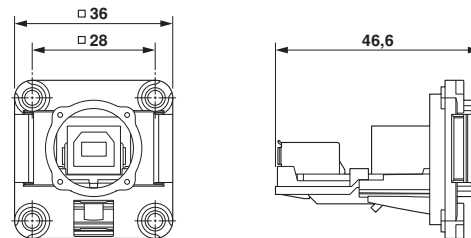

Dimensional drawing