
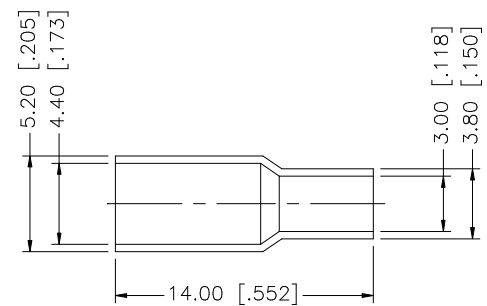
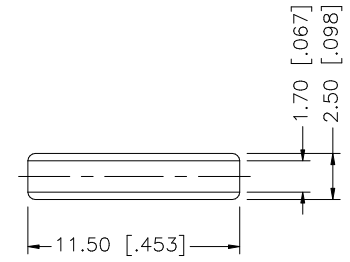
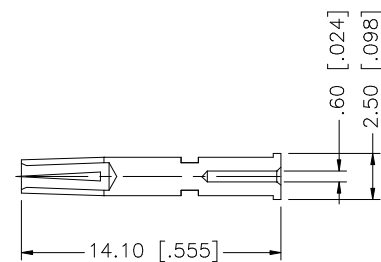
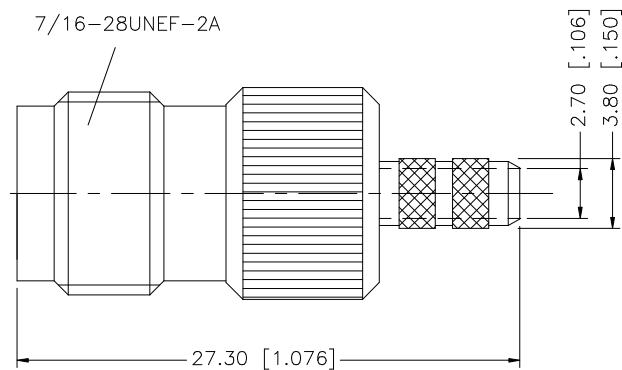


REV.	DATE	DESCRIPTION
NC	01/06/98	INITIAL RELEASE
A	02/19/07	UPDATE DRAWING FORMAT

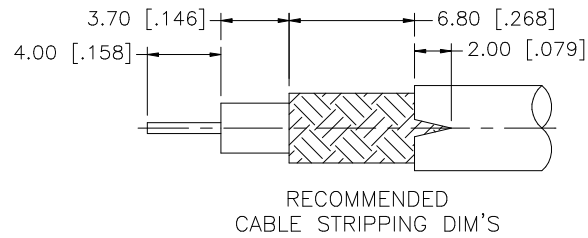

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .178"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	02/19/07						
7						CHECKED			PART DESCRIPTION TNC CRIMP JACK (FOR RG-174, 316 CABLE)					
6						ISSUED								
5						SHEET	1 OF 1			PART NO. 122138				
4	FERRULE	BRASS	NICKEL	1										
3	CONTACT PIN	PHOS. BRONZE	GOLD	1					DWG. NO. 122138.DWG					
2	INSULATOR	DELRIN	NATURAL	1										
1	BODY	BRASS	NICKEL	1				REV. A		SIZE A	SCALE NA			
DESCRIPTION		MATERIAL	FINISH	QTY	CAD FILE		C:/122/122138.DWG							