






THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1770144	2017/07/10	Ruru	Modify Note





With Liquid Glue
點防水膠



⑦ Sealing Nut ⑥ Clamp Ring ⑤ Seals B2 ④ Seals B1 ③ Lock Nut ② Connector ① O-Ring



- Note:
- * $\varnothing$ Important Dimension.
 - * Waterproof Rate : IP66
 - * O-Ring: EPDM, Black
 - * Housing: ,Nylon+GF, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Lock Nut: Nylon+GF, Black
 - * Seals: EPDM, Black
 - * Clamping Ring: Nylon+GF, Black
 - * Sealing Nut: Nylon+GF, Black
 - * PE Bag: 90mm*85mm
 - * Liquid Glue: Clear
 - * Seals B1 for Cable OD: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$
(防水墊圈B1線徑: $\varnothing 4.5\text{mm} \sim \varnothing 6.5\text{mm}$)
 - * Seals B2 for Cable OD: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$
(防水墊圈B2線徑: $\varnothing 3.5\text{mm} \sim \varnothing 5.3\text{mm}$)
 - * One Set Unassembled in One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)

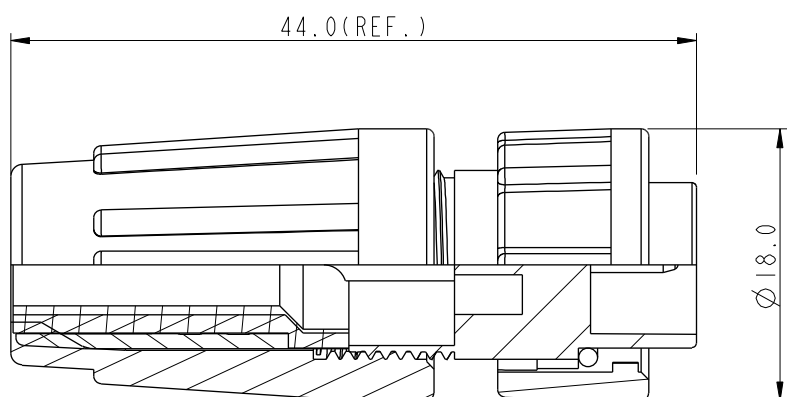

Pin Assignments
Front View 前視圖

UNIT: mm			TITLE Standard, Assy Lock 2Pin F Conn M Pin		
TOLERANCE	± 0.25	± 0.1	SCALE 1:1	SIZE A4	SHEET 1 OF 1
.XX	± 0.1	± 0.05	REV. B	WC-REV. A.3	$\varnothing$ Inspection item
.XXX	± 0.05	$\pm 1^\circ$			
ANGLES	$\pm 1^\circ$				

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO BD-02BFMA-LL6001	DRAWN BY Ruru	DATE 2017-07-10
DWG NO BD-02BFMA-LL6001	CHECKED BY Rita	DATE 2017-07-10
CUSTOMER ALTW	APPROVED BY Max	DATE 2017-07-10