

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	L	REV PER ECO 17-010242	8-8-17	CT	DM

D

C

B


A

D


C

B

A

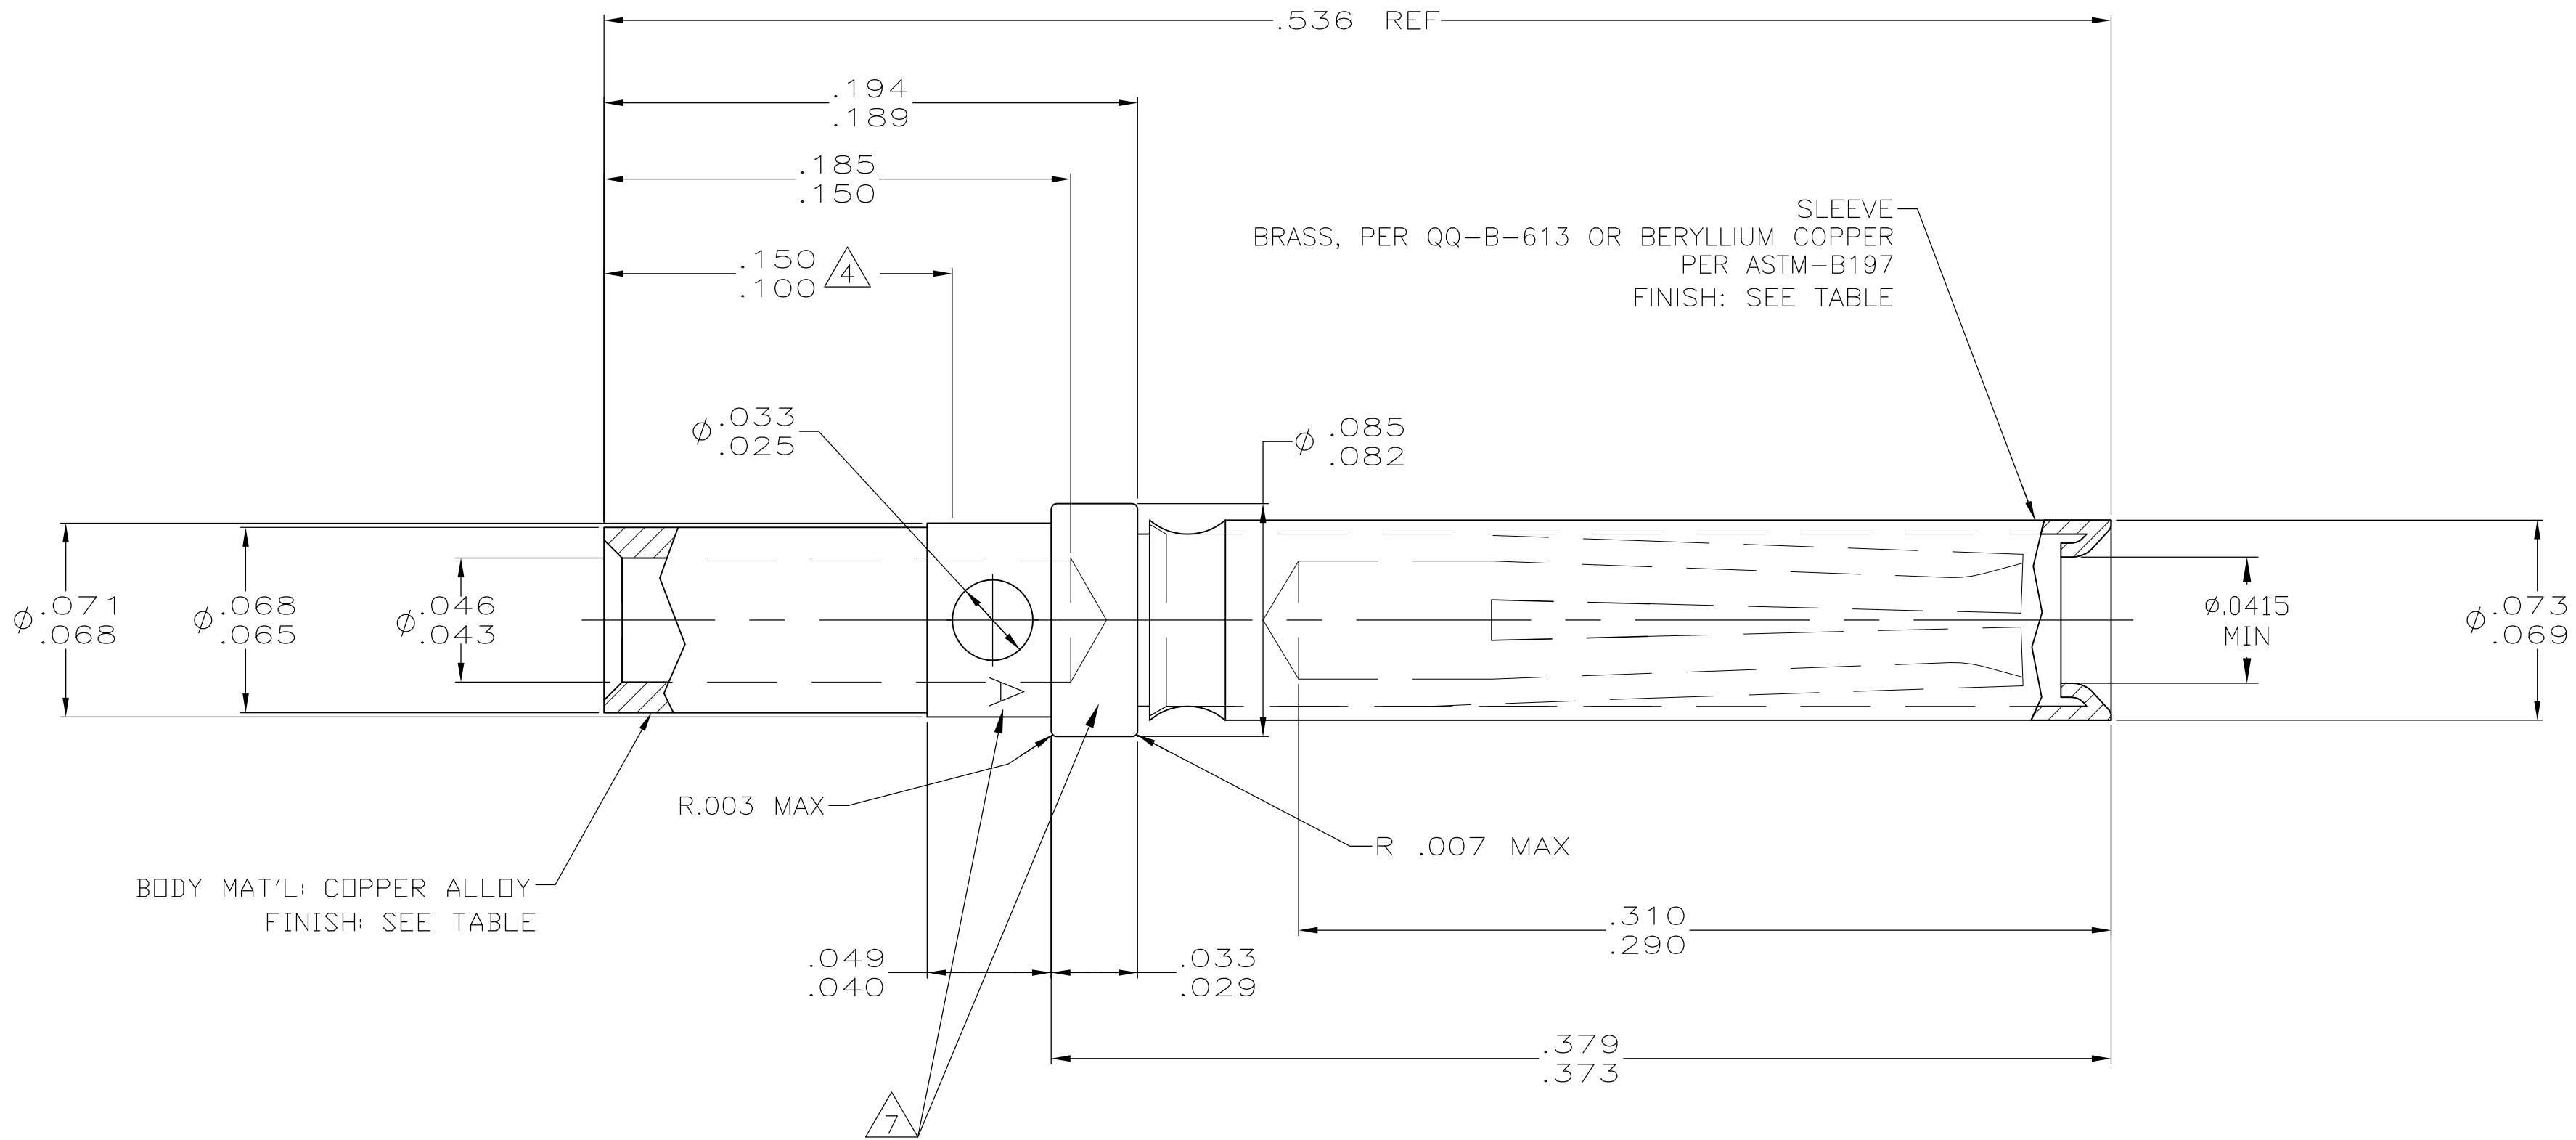

- CONTACTS QUALIFIED TO GSFC-S-311-P-4/10, NASA P/N G-10-S1
- ALL DIAMETERS ARE CONCENTRIC WITH EACH OTHER WITHIN .004 T.I.R.
- ALL SURFACES HAVE $\sqrt{63}$ OR BETTER FINISH.
- POINT OF PLATING THICKNESS MEASUREMENT.
- SLEEVE MAY BE CRIMPED OR DIMPLED TO BODY.
- ~~MINIMUM SEPERATION FORCE OF 7 OZ USING A .039 PIN AND 4 OZ MAX ENGAGEMENT FORCE USING A .041 PIN.~~
- OPTIONAL LOCATION FOR STAMPED LETTER "A"
- PLATING: GOLD PER ASTM-B-488 (TYPEII) OVER COPPER PER MIL-C-14550, CLASS 4.
- PLATING: GOLD PER ASTM-B-488 (TYPEII) OVER NICKEL PER AMS-QQ-N-290.
- CONTACTS MEET REQUIREMENTS OF AS39029/63-368
- RESTRICTED PART NUMBER.

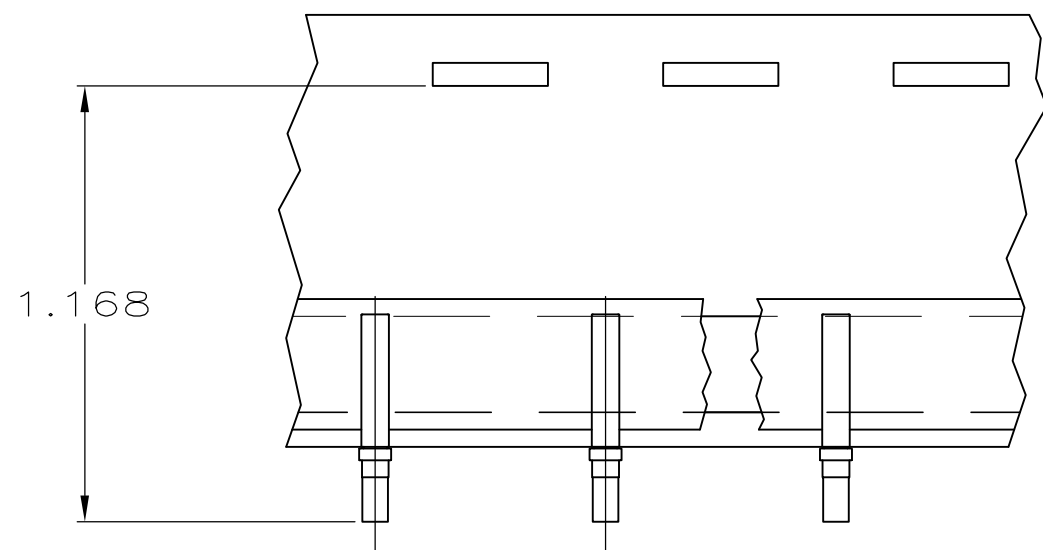

TAPE MOUNTED
PART NO 206793-2 ONLY
SCALE 2:1

OBSOLETE	11		1-206793-1
	9	AS SHOWN	206793-4
	8	SAME AS -1 EXCEPT 6	206793-3
	1	8 SAME AS -1 EXCEPT TAPE MOUNTED 5,000 CONTACTS PER REEL	206793-2
	1	8 AS SHOWN	206793-1
	FINISH	DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	C.C.THOMAS	11-20-02	TE Connectivity			
		CHK	D.MILLER	11-20-02				
		APVD	D.MILLER	11-20-02	NAME			
		PRODUCT SPEC			SOCKET CONTACT ASSY, SIZE 20, AMPLIMITE			
		APPLICATION SPEC						
					SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		WEIGHT			A2	00779	C=206793	-
		CUSTOMER DRAWING			SCALE	20:1	SHEET	1 of 1
					REV			