


DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE


00

BS, A , 200868, 009

REV.	DATE	DESCRIPTION	BY	C'K'D'
00	16/11/07	FIRST ISSUE	R.Ch	

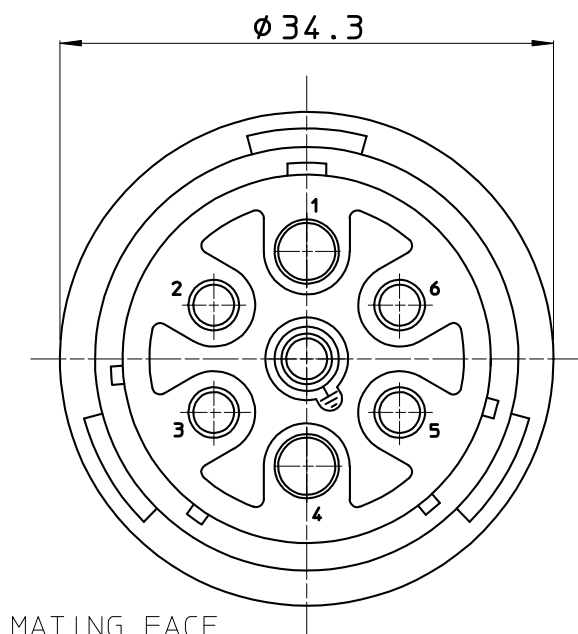

MATING FACE

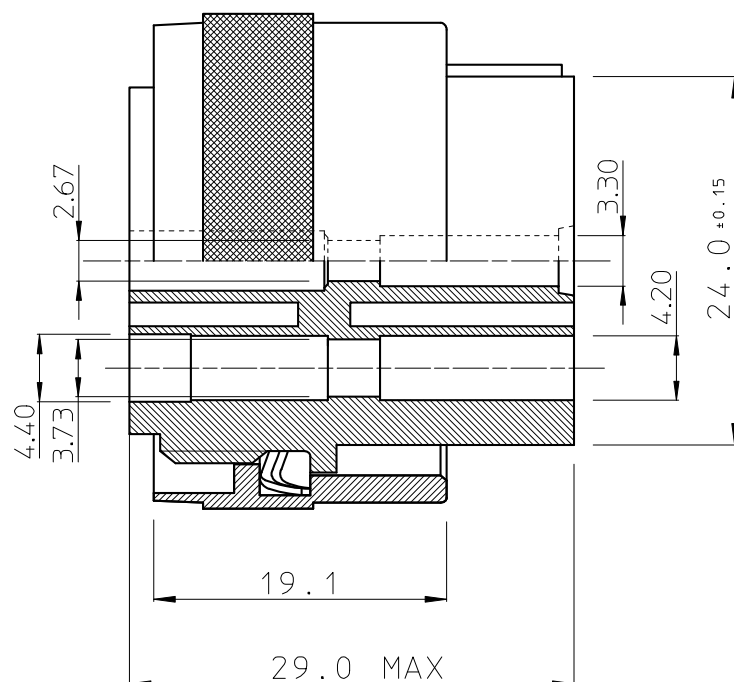

MATERIAL

- BODY : GLASS-FILLED POLYESTER.
COLOUR : BLACK.
- BAYONET COUPLING RING : HIGH STRENGTH CuZn ALLOY,NICKEL PLATED.

PERFORMANCE CHARACTERISTICS

- OPERATING TEMPERATURE : -25 °C TO +125 °C.
- INSULATION RESISTANCE : 5000 M Ohm MIN.
- TEST POTENTIAL : 2000 V EFF.

NOTES

- CONNECTOR ACCEPTS: Ø 2.4 MM MACHINED SOCKET CONTACTS IN POS. 1, 4.
Ø 1.6 MM SOCKET CONTACTS IN POS. 2, 3, 5, 6 AND 7.
- CONNECTOR ACCEPTS # 16 STRIP FORMED, MACHINED AND SUBMINIATURE COAXIAL ' PIN AND SOCKET CONTACTS AND # 12 MACHINED CONTACTS '
- CONTACTS TO BE ORDERED SEPARATELY.

GEN. ST.	01		02		03		04		05		06		07		08		0D		50		60		70		80		90				
INT. ST.	10	11	12	13	14	18	20	31	32	33	34	38	39	40	42	43	44	45	46	48	56	70	72	73	75	76	81	82	83	84	88

1DEC ±0,2 1DEC 2DEC ±0,1 2DEC ANGLES ±1° HOEKEN	APPR.		DATE		SIGN.		FEMALE UTG187 PLUG WITH 2 CONTACTS Ø2.4											
	DRAFT		16/11/07		ROUILLARD		CAT. No . UTG6187SN34											
	CHECKED																	
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	PROD. MGR.						 SOURIAU Route Nationale 23 72470 CHAMPAGNE										SCALE	
	PR.ENG.MGR.																2/1	
	PR.MGT.MGR.																	
ALL DIMENSIONS IN MM		REFERENCES / REFERENTIES																
																		
ALLE AFMETINGEN IN MM																		
												BS , A , 200868,009						
												NOT EXPORT CONTROLLED						
												DRAWING NR. CUSTOMER DRAWING REVISION						