

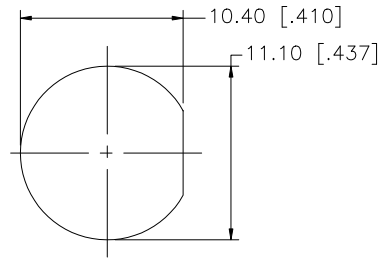
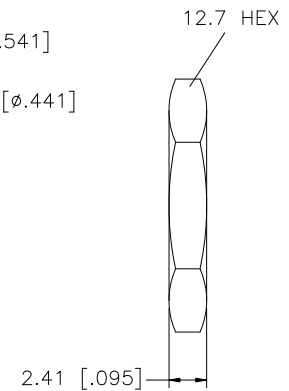
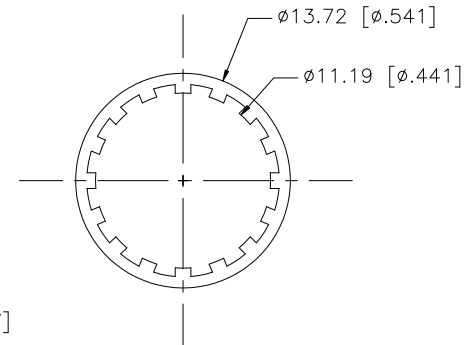


REV.	DATE	ECR NO.	DESCRIPTION
NC	02/24/02	—	INITIAL RELEASE
A	03/26/09	100089	UPDATE DRAWING FORMAT, ADD TOLERANCES TO MOUNTING HOLE DIMS.

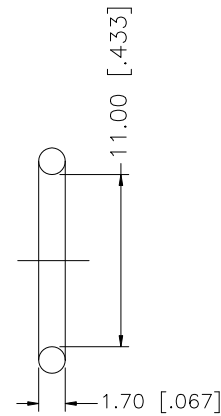

RECOMMENDED
MOUNTING HOLE

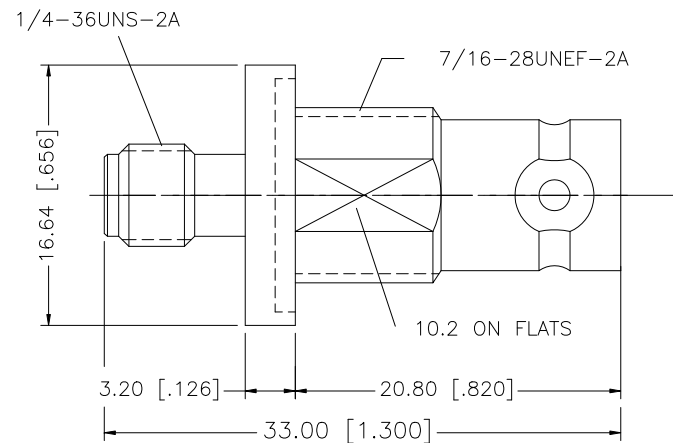

NOTE:

1. MAX. PANEL THICKNESS = 6.6mm

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex			
7						DRAWN GRS	03/26/09				
6	HEX NUT	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	CHECKED		PART DESCRIPTION SMA JACK TO BNC BULKHEAD JACK ADAPTER			
5	LOCK WASHER	PHOS. BRONZE	NICKEL	1		ISSUED					
4	GASKET	SILICONE	RED	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 ± 0.007" .315 - 1.180 ± 0.015" 1.180 - 4.724 ± 0.020"	SHEET 1 OF 1		PART NO. 242181			
3	CONTACT PIN	BER. COPPER	GOLD	1							
2	INSULATOR	PTFE	NATURAL	1	DO NOT SCALE DRAWING	CAD FILE	C:/242/242181.DWG	DWG. NO. 242181.DWG			
1	BODY	BRASS	NICKEL	1							
	DESCRIPTION	MATERIAL	FINISH	QTY				REV. NC	SIZE A	SCALE NA	