


THIS DRAWING AND THE INFORMATION SET FORTH HEREON ARE THE PROPERTY OF TYCO ELECTRONICS AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUBLICATION, DUPLICATION, DISCLOSURE, OR USE FOR ANY PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY TYCO ELECTRONICS IS PROHIBITED.

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
G	REVISED PER ECD-15-002747	19/02/15	H. SMITH

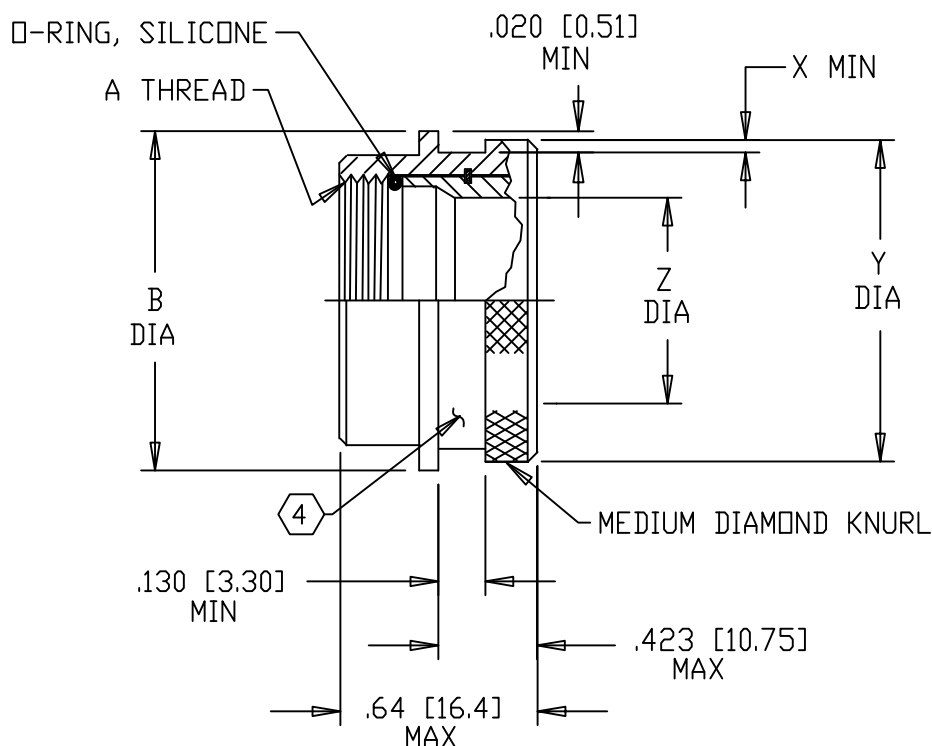

NOTES:

- THIS PRODUCT IS DESIGNED TO TERMINATE A HEAT SHRINKABLE LIPPED BOOT TO A CONNECTOR.
- FOR ADDITIONAL DIMENSIONS, ORDERING INFORMATION AND MODIFICATIONS, SEE CH00-0250-004.
- ADAPTER TO BE PERMANENTLY MARKED WITH CODE IDENT. NO. AND PART NO. (E.G.: 06090-203M612-19B).
- KNURL INSIDE BOOT GROOVE MAY BE SUPPLIED AT MANUFACTURE'S OPTION.
- ADAPTER MATES TO MIL-C-26482 SERIES I, MS3110, MS3111, MS3116 CLASS E & F CONNECTORS.

If this document is printed it becomes uncontrolled. Check for the latest revision

(C) 2015 Tyco Electronics Corporation. All Rights Reserved

Raychem Adapters
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE INCHES. METRIC
DIMENSIONS ARE IN BRACKETS.

DECIMAL TOLERANCES
.XXX ± .005 [0.13 mm]
.XX ± .01 [0.25 mm]
.X ± .1 [2.54 mm]

ANGLE TOLERANCE
.X ± 1°


DRAWN
N. NAGAR

DATE
19FEB15

MATERIAL
SEE NOTES

FINISH
SEE NOTES

THIRD ANGLE
PROJECTION



TE Connectivity

TITLE
ADAPTER, SOLID
CODE 21

SIZE
A

CODE IDENT. NO.
06090

DWG. NO.
203M6XX

REV

CAD FILE
203M6XX_G

DO NOT SCALE THIS DRAWING

SHEET 1 OF 2

G

BASE PART NUMBER	SHELL SIZE 	A THREAD CLASS 2B	B DIA MAX	X MIN	Y +.020 -.000 [+.025] [-0.00] DIA	Z MIN
203M608	8	.438-28 UNEF	.77 [19.6]	.044 [1.12]	.673 [17.10]	.261 [6.63]
203M610	10	.562-24 UNEF	.89 [22.6]	↑	.800 [20.3]	.365 [9.27]
203M612	12	.688-24 UNEF	1.02 [25.9]	↓	.925 [23.5]	.511 [12.98]
203M614	14	.812-20 UNEF	1.14 [29.0]	.044 [1.12]	1.047 [26.6]	.605 [15.37]
203M616	16	.938-20 UNEF	1.27 [32.3]	.069 [1.75]	1.224 [31.1]	.730 [18.54]
203M618	18	1.062-18 UNEF	1.39 [35.3]	↑	1.309 [33.25]	.823 [20.91]
203M620	20	1.188-18 UNEF	1.52 [38.6]	↓	1.421 [36.1]	.949 [24.11]
203M622	22	1.312-18 UNEF	1.64 [41.7]	↓	1.551 [39.4]	1.074 [27.28]
203M624	24	1.438-18 UNEF	1.77 [45.0]	.069 [1.75]	1.677 [42.6]	1.168 [29.67]