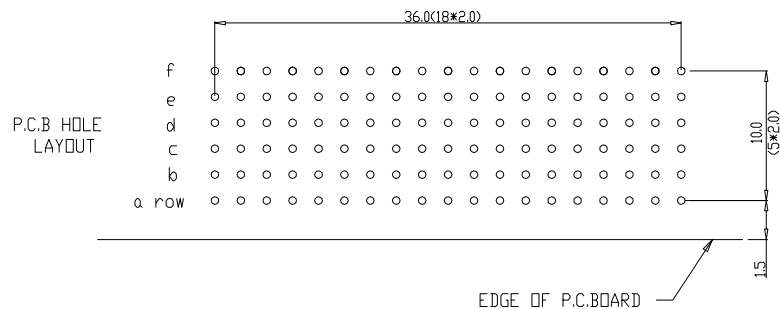
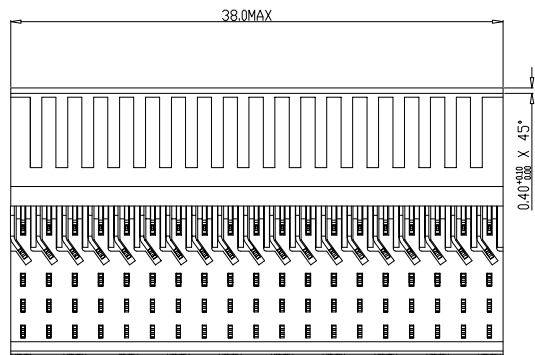
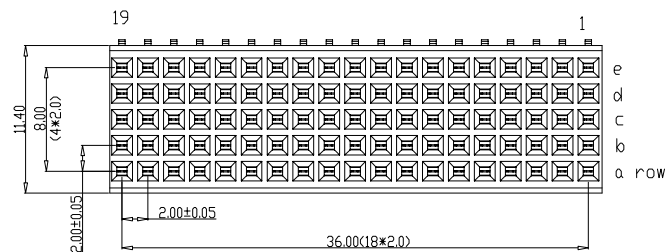


PERFORMANCE CHARACTERISTICS

1.5 A AT 20°C (FULLY LOADED)
CURRENT RATING: 1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE: 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE : 20 m Ω MAX
INSERTION FORCE: 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN /CONT
INSULATION RESISTANCE: 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR :LF=LEAD FREE
- THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material		Spec ref	
Mat code	✓	TOLERANCE	MM
Heat treat		1DEC ±0.2 1DEC	
Plating/Finish		2DEC ±0.1 2DEC	
Dr	15 10 97	Mfret	size
Eng		Product family	A1
Chr		Model Name	ECN
Appr		Model Revision	REL Level
FCI		MPACS 5+2R RA	BS.C .201444.038
RCP CONN TYPE B		CUSTOMER DRAWING	Rev. D
Pro/E file	CAT.NO. HM2R71PA5108----	sheet 1 of 1	