

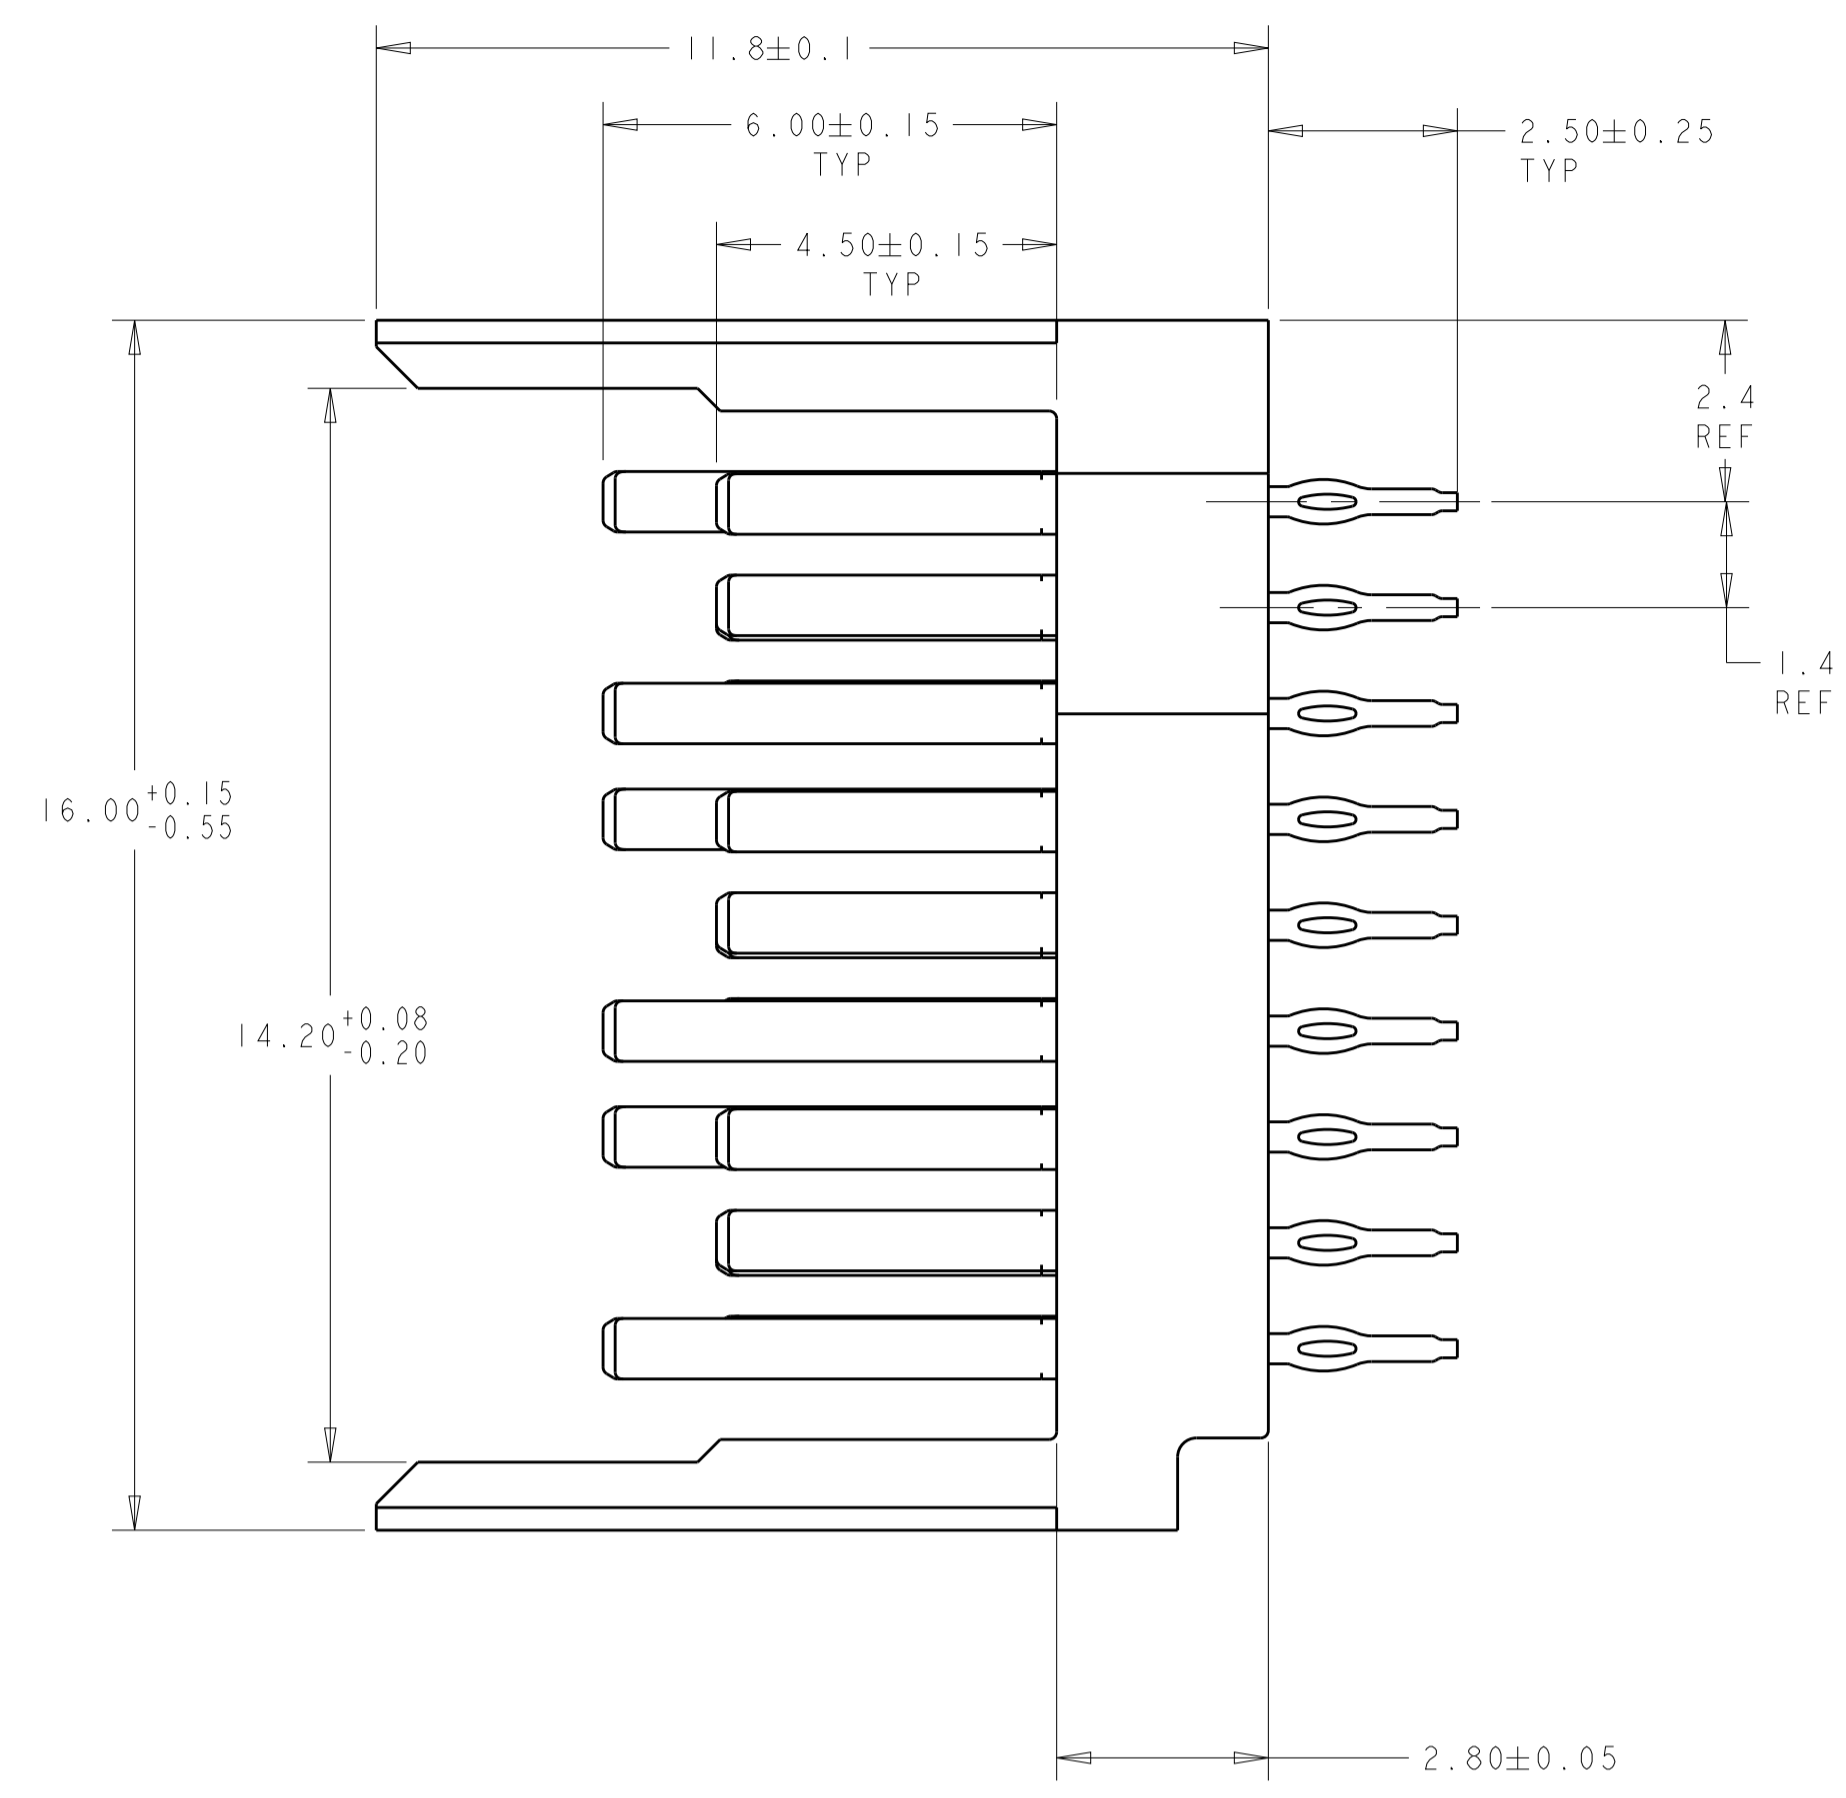
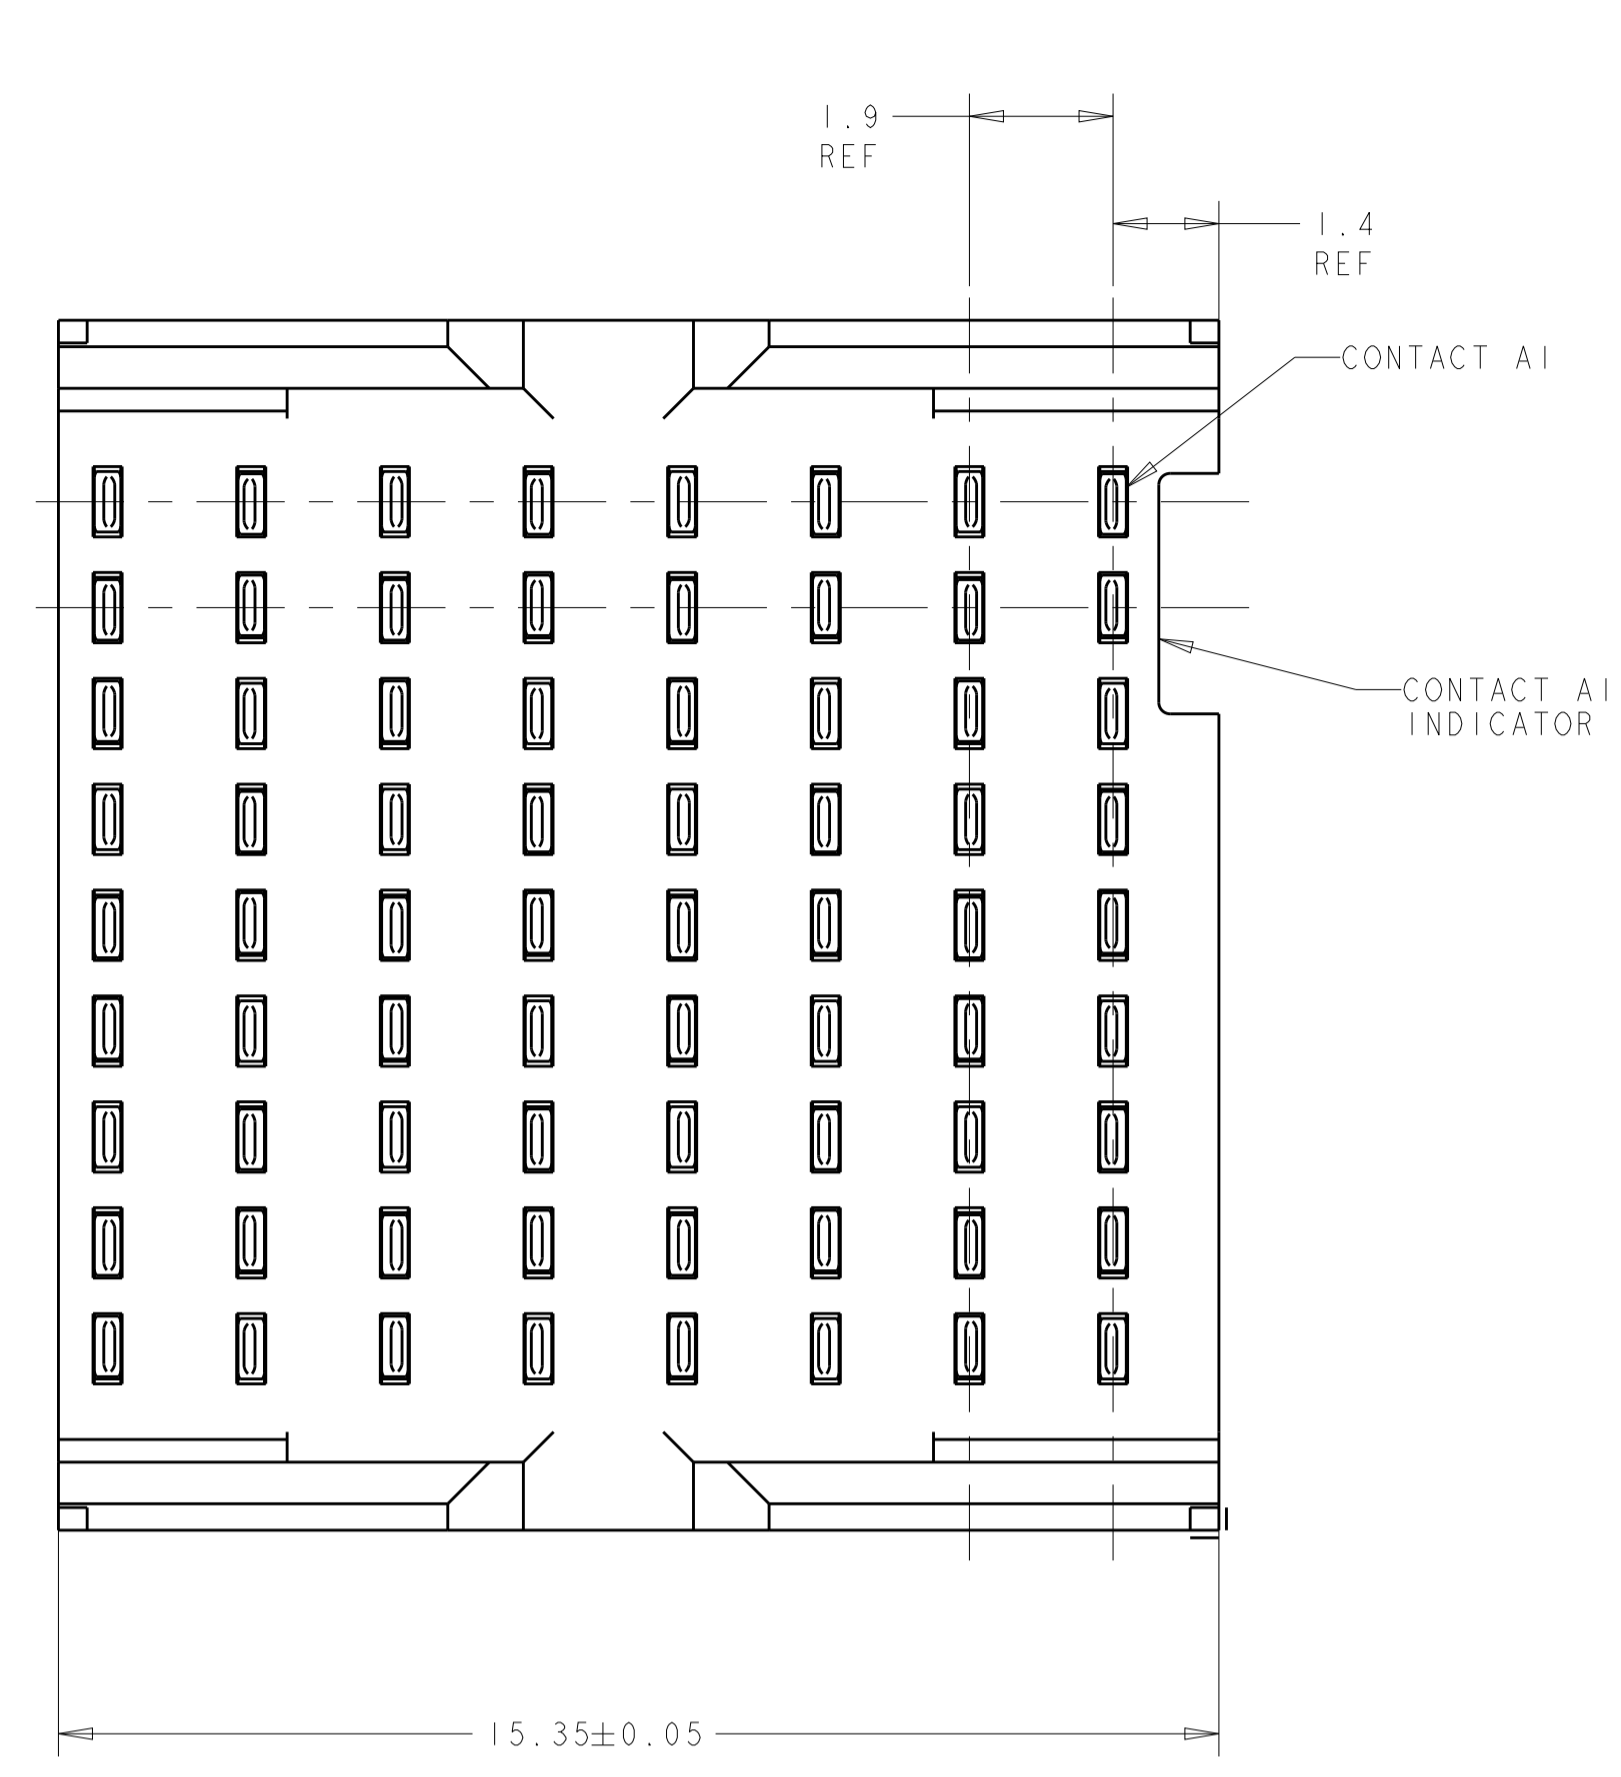


| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|---------------------------|-----------|-----|------|
| | | P | LTN | DESCRIPTION | DATE | DWN | APVD |
| AD | 00 | B | | REVISED PER ECO-13-002771 | 20MAR2013 | KH | RP |

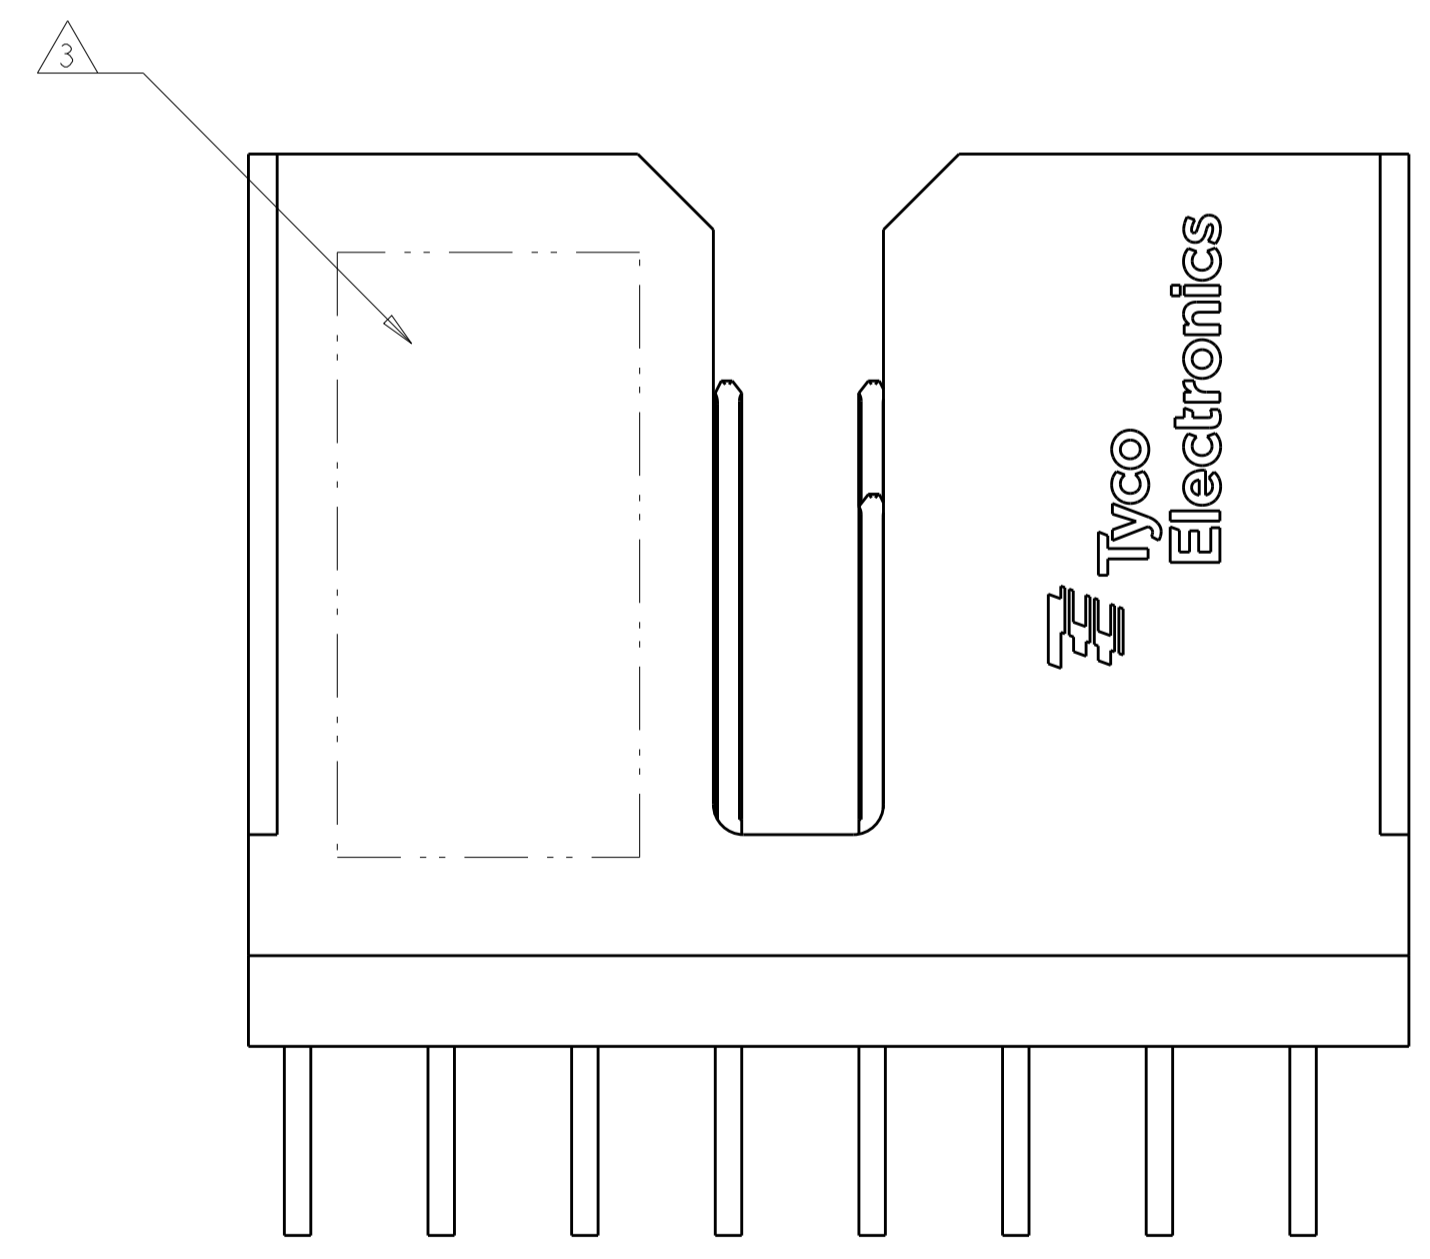

- △ MATERIAL:
CONTACT - PHOS BRONZE
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- △ FINISH:
CONFORMS TO THE REQUIREMENTS OF
TE PRODUCT SPECIFICATION 108-2303-1; BASED
ON TELECORDIA GR-1217-CORE FOR SYSTEM
QUALITY LEVEL III, APPLICATIONS IN
CONTROLLED ENVIRONMENTS (CENTRAL OFFICE).
COMPLIANT PIN AREA- 0.5µm MIN MATTE TIN OVER 1.27µm MIN NICKEL.
- △ 3 CONNECTOR MARKED WITH PART NUMBER, DATE CODE,
85 OHM, AND STANDARD IN APPROXIMATE AREA SHOWN.
- △ 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY
CUSTOMER.
- 5. CONTACT AREA LUBRICATED WITH BELLCORE
APPROVED LUBRICANT. TECHNICAL REFERENCE
GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- △ 6 REFERENCE APPLICATION SPEC FOR RECOMMENDED PLATED
THRU HOLE DIAMETER AND PLATING THICKNESS.

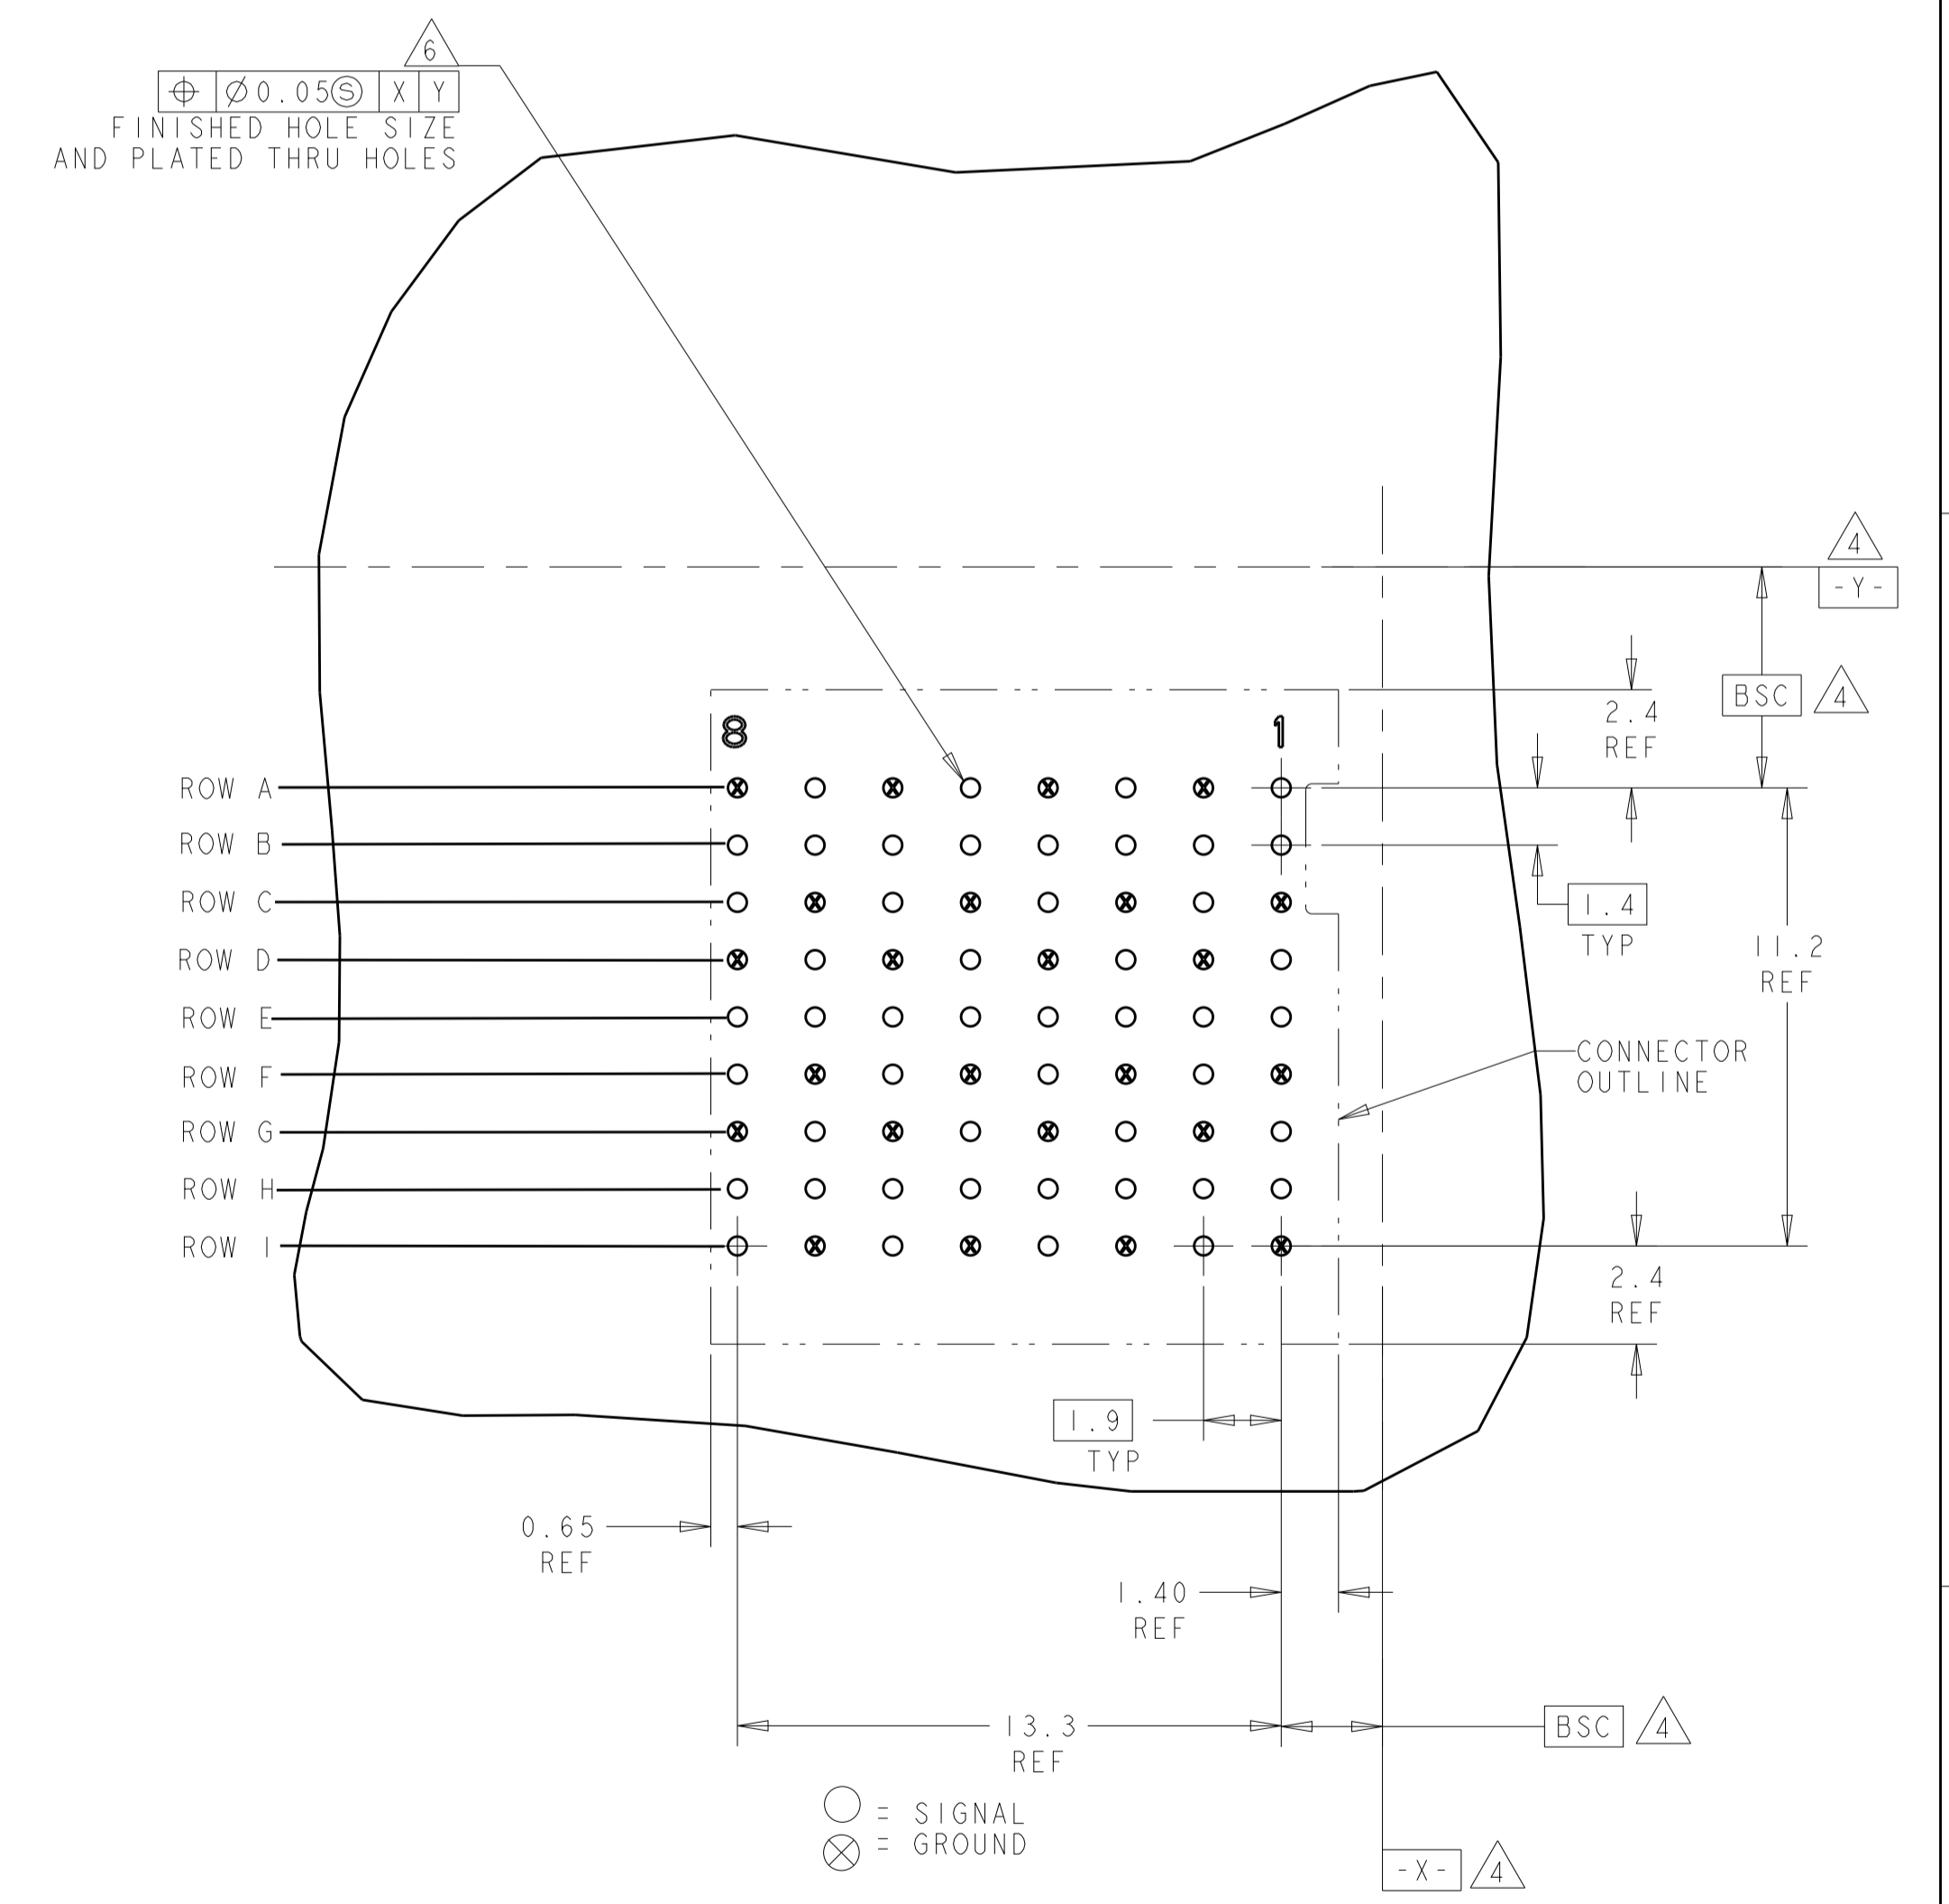

RECOMMENDED PC BOARD
LAYOUT BACKPLANE,
COMPONENT SIDE SHOWN
SCALE 6:1

1934975-1
PART NUMBER

| | | | | |
|---|--|----------------------------------|---|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN J. K. SHOBER 02JUN2009 | TE Connectivity | |
| DIMENSIONS: | | CHK C. RITTER 02JUN2009 | NAME HEADER ASSEMBLY, OPEN ENDED, 3' PAIR, 8' COLUMN TinMan 85 OHM | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD C. RITTER 02JUN2009 | PRODUCT SPEC 108-2303-1 | |
| mm | | APPLICATION SPEC 114-13243 | SIZE A100779 | |
| 0 PLC ± | | RESTRICTED TO | SCALE 10:1 SHEET 1 OF 1 REV B | |
| 1 PLC ± | | WEIGHT | | |
| 2 PLC ± | | CUSTOMER DRAWING | | |
| 3 PLC ± | | | | |
| 4 PLC ± | | | | |
| ANGLES ± | | | | |
| FINISH | | | | |