



THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

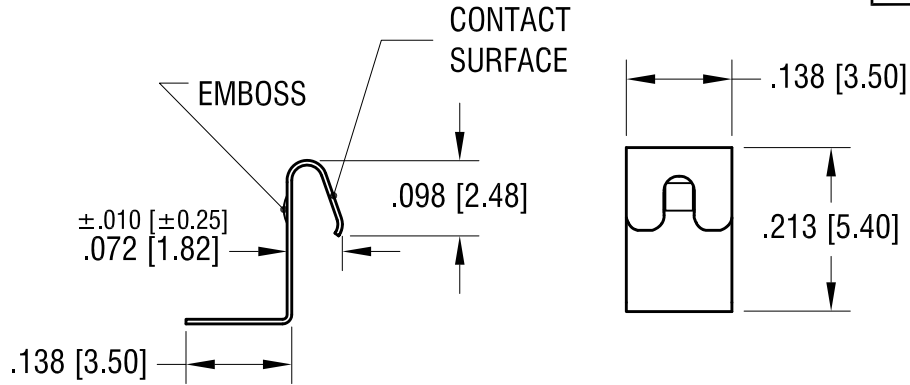

P/N 122

TOLERANCE ± 0.005 [± 0.13]

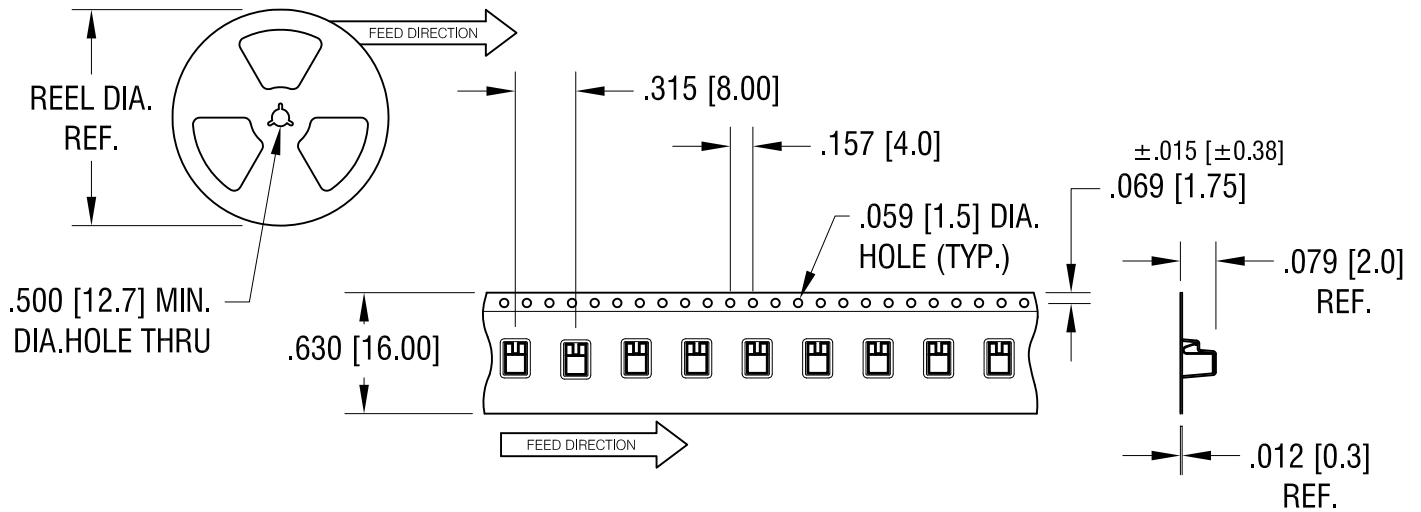

NOTES:

1. SUPPLIED ON TAPE AND REEL ONLY.

TAPE AND REEL SPECIFICATIONS:

2. TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER
ANSI/EIA-481 STANDARD

3. REEL:

13.0 [330.0] DIA. 1000 PIECES OF
P/N 122 PER REEL

CONTACT SPECIFICATIONS:

1. MAT'L- .006 [0.15] TH'K STAINLESS STEEL
2. FINISH: GOLD PLATE

12.12.16	CHANGE AS PER ECN 16-101	A
DATE	DESCRIPTION	REV.

KEYSTONE ELECTRONICS CORP.			
www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME POSITIVE CONTACT ON TAPE & REEL			
MATERIAL AS NOTED			
FINISH AS NOTED		DRN BY NT	DATE 1.06.16
		APP'D LN	SCALE N/A
TOLERANCES	INCH [MM]	CODE	DWG NO.
DECIMAL	$\pm .010$ [± 0.25]	C	
ANGULAR	$\pm 1^\circ$		
UNLESS OTHERWISE SPECIFIED			
			122TR