


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-	C	ECR-13-004288	15MAR2013	RC AH

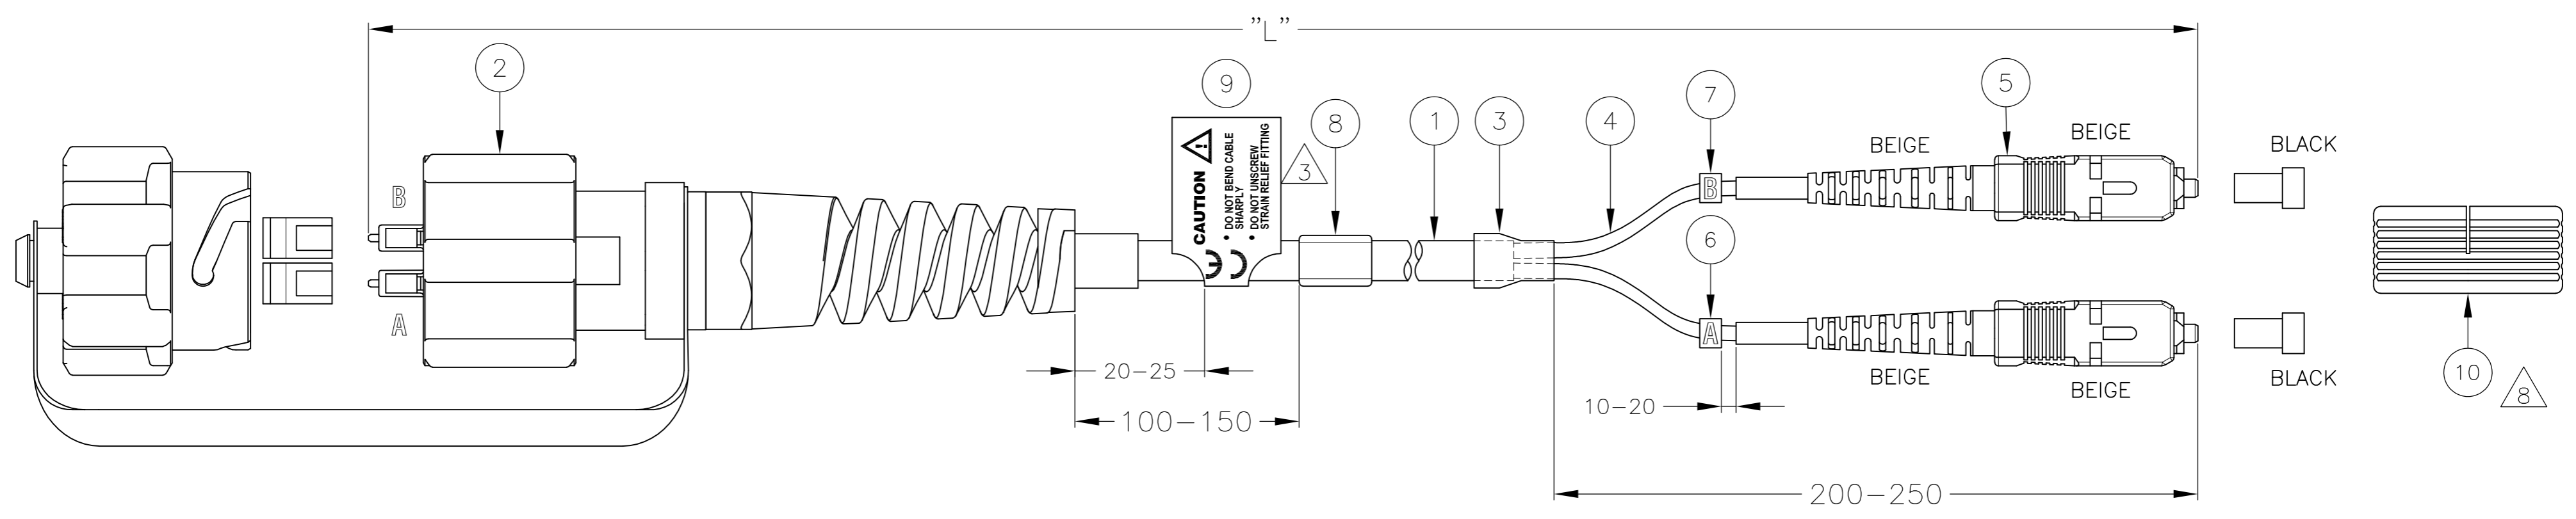

FIBER CONNECTIVITY	
ODVA	SC CONN.
A	A
B	B

PART NUMBER	"L" (METER)		MAXIMUM Δ_1 ATTENUATION (dB)
	MIN	MAX	
1-1920985-0	9.85	10.15	-
2-1920985-0	19.80	20.20	0.55
5-1920985-0	45.50	50.50	0.6
8-1920985-0	79.20	80.80	0.64
8-1920985-1	118.8	121.2	0.7
8-1920985-2	297.0	303.0	1.0
9-1920985-9	99.00	101.00	0.65

- NOTES:**
- 1 MAXIMUM CONNECTOR ATTENUATION IS 0.5 dB PLUS CABLE ATTENUATION OF 1.5 dB/km AT 1300 nm, 155 mbps (SEE TABLE)
 - 2 FILLED OUT TEST RESULT SHEET SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
 - 3 INFORMATION ON LABEL SEE DETAIL:
 - BARCODE
 - UNIQUE SERIAL NUMBER
 - ASSEMBLY LENGTH
 - TE CONNECTIVITY PART NUMBER
 - TE CONNECTIVITY ORDER NUMBER
 - 4 CABLE INFORMATION:
 - FIBER CORE DIAMETER: 62.5/125 μ m
 - OUTER JACKET DIAMETER: 5.5 mm
 - OUTER JACKET COLOUR: BLACK
 - OUTER JACKET MATERIAL: FLAME RETARDANT TPU
 - 5 ENVIRONMENTAL PERFORMANCE -40°C TO +85°C
 - 6 IP67 RATED
 - 7 CABLE, EXTRANAL PLUG COMPONENTS AND CAP ARE UV STABLE
 - 8 CLIP DELIVERED SEPARATE IN THE BAG WITH THE ASSEMBLY

LABEL DETAIL: 3



Qty	Description	Item
1	SC DUPLEX CLIP	10
1	FOAC ODVA WARNING LABEL WITH CE-MARKING	9
1	FOAC INFORMATION LABEL	8
1	LABEL "B"	7
1	LABEL "A"	6
2	SC CONNECTOR ASSEMBLY, MULTI MODE, BEIGE	5
2	FOAC PROTECTIVE TUBING, BLACK	4
1	FOAC HEAT SHRINK TUBING, BLACK	3
1	PLUG SUBASSY, LC ODVA INDUSTRIAL CONNECTOR, WITH CAP	2
L	FOCAB 5.5 mm 2FOLD, MULTI MODE 62.5/125, BLACK	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R. COOLEN 03SEP2008		
CHK A. HENGELMOLEN 03AUG2010		
APVD A. HENGELMOLEN 03AUG2010		
PRODUCT SPEC		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME
0 PLC ± -	1 PLC ± -	FIBER OPTIC LEAD 5.5 mm
2 PLC ± -	3 PLC ± -	LC/DPX WITH ODVA ADAPTER - SC/DPX
4 PLC ± -	ANGLES ± -	MULTI MODE 62.5/125
MATERIAL	FINISH	SIZE CAGE CODE DRAWING NO RESTRICTED TO
-	-	A2 00779 C=1920985 -
CUSTOMER DRAWING		SCALE NTS SHEET 1 OF 1 REV C