

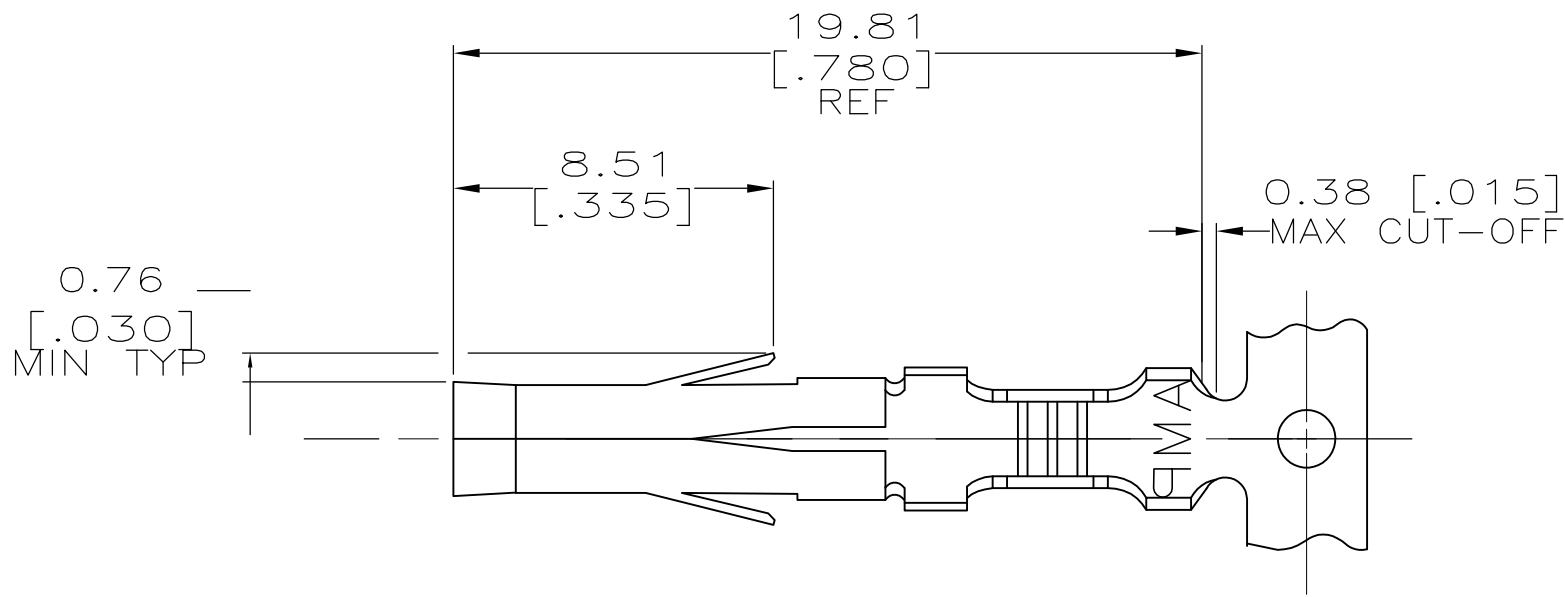
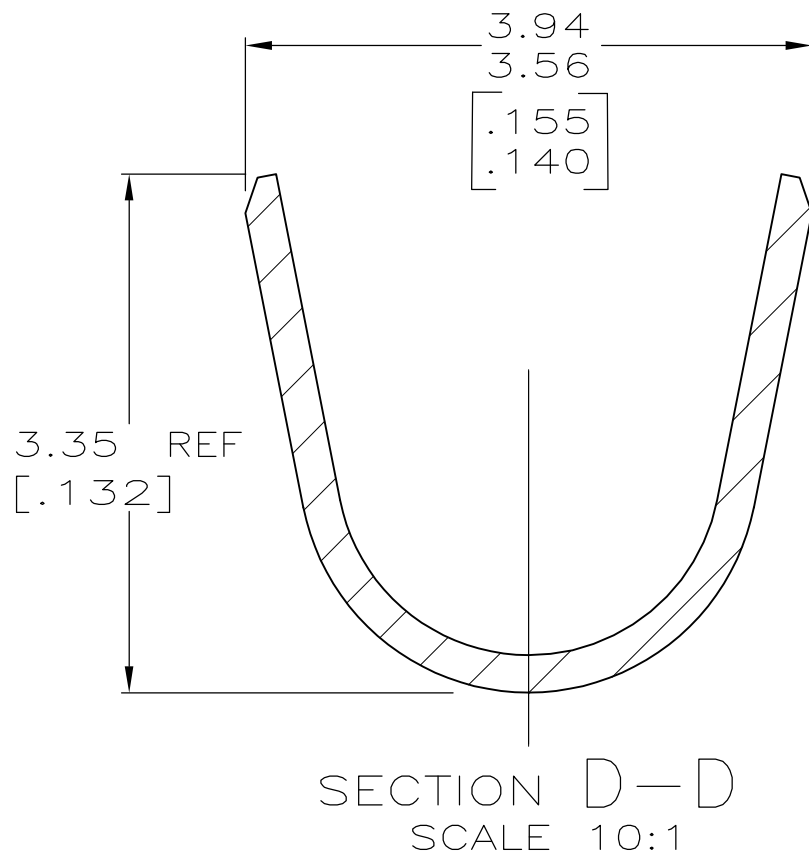
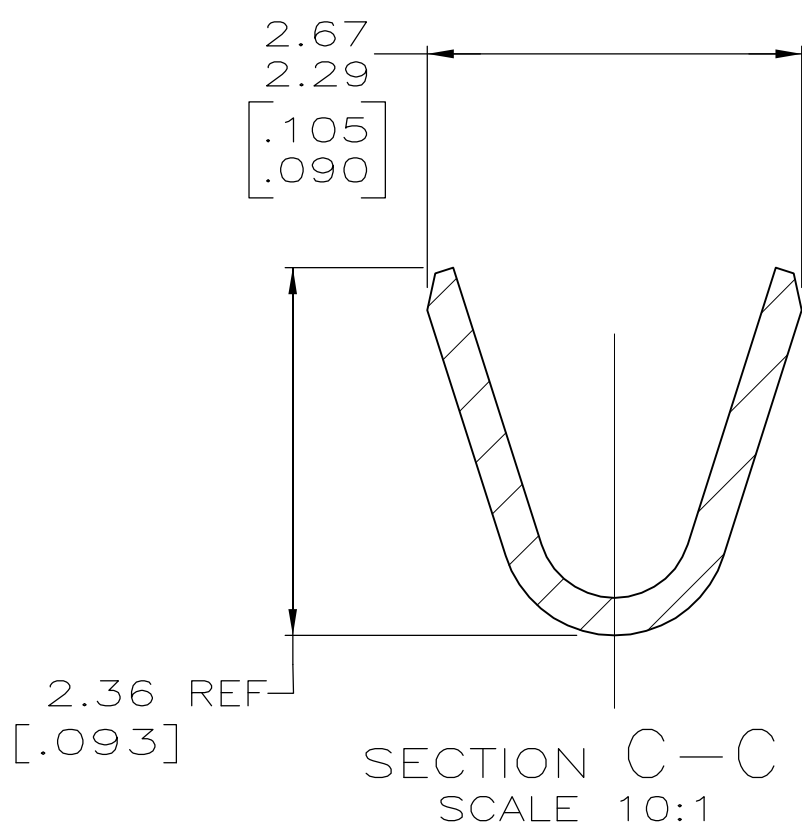
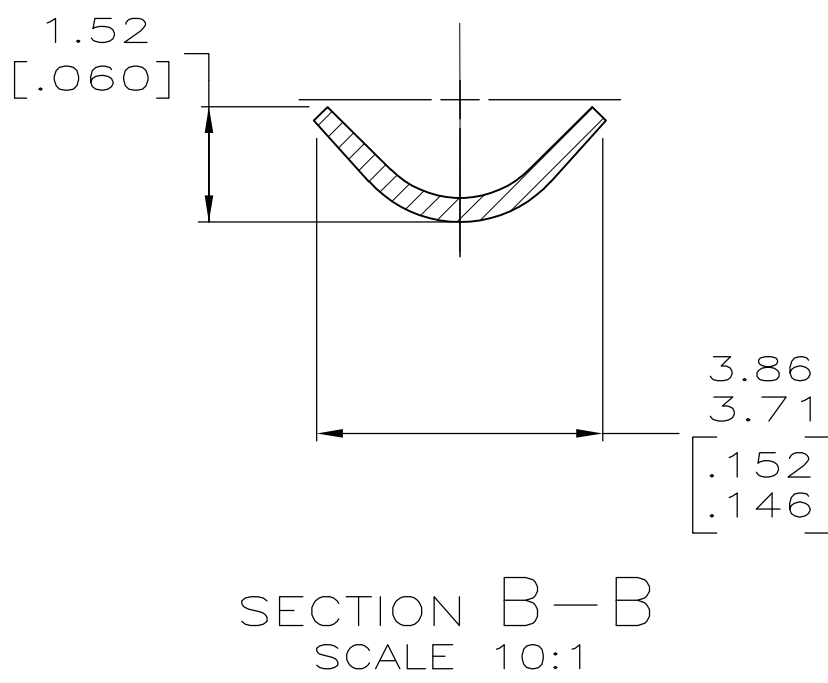
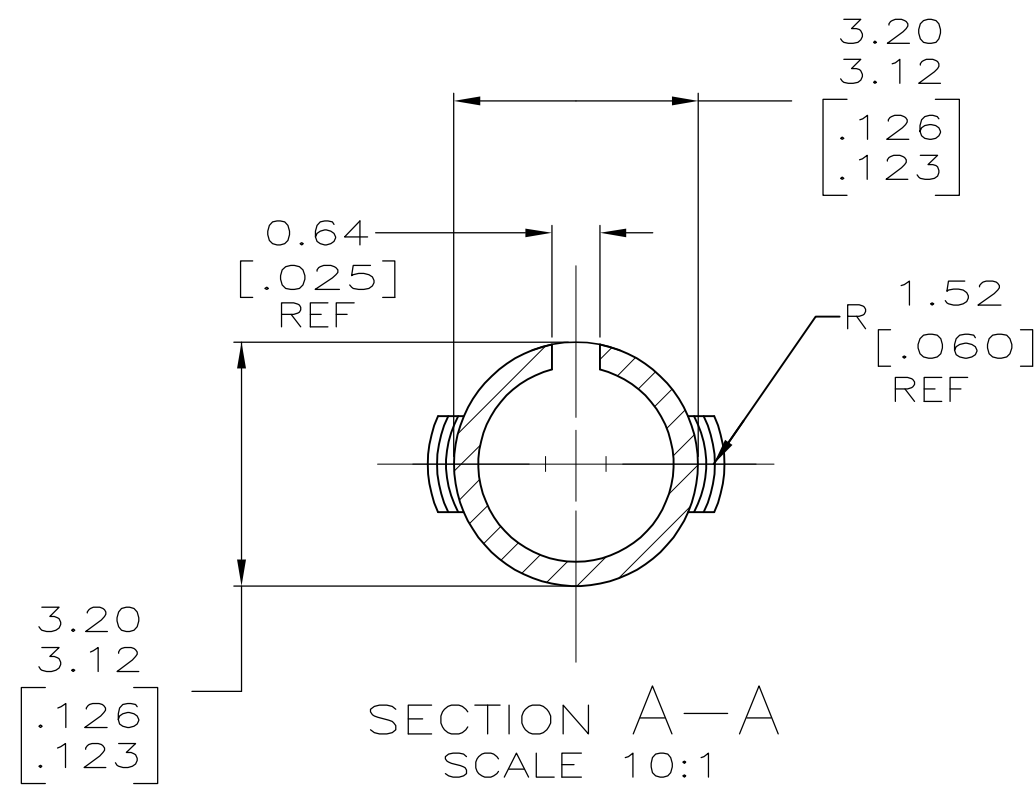


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
CM	0	AP2	REVISED	PER ECO-11-004917	11MAR11	RK HMR

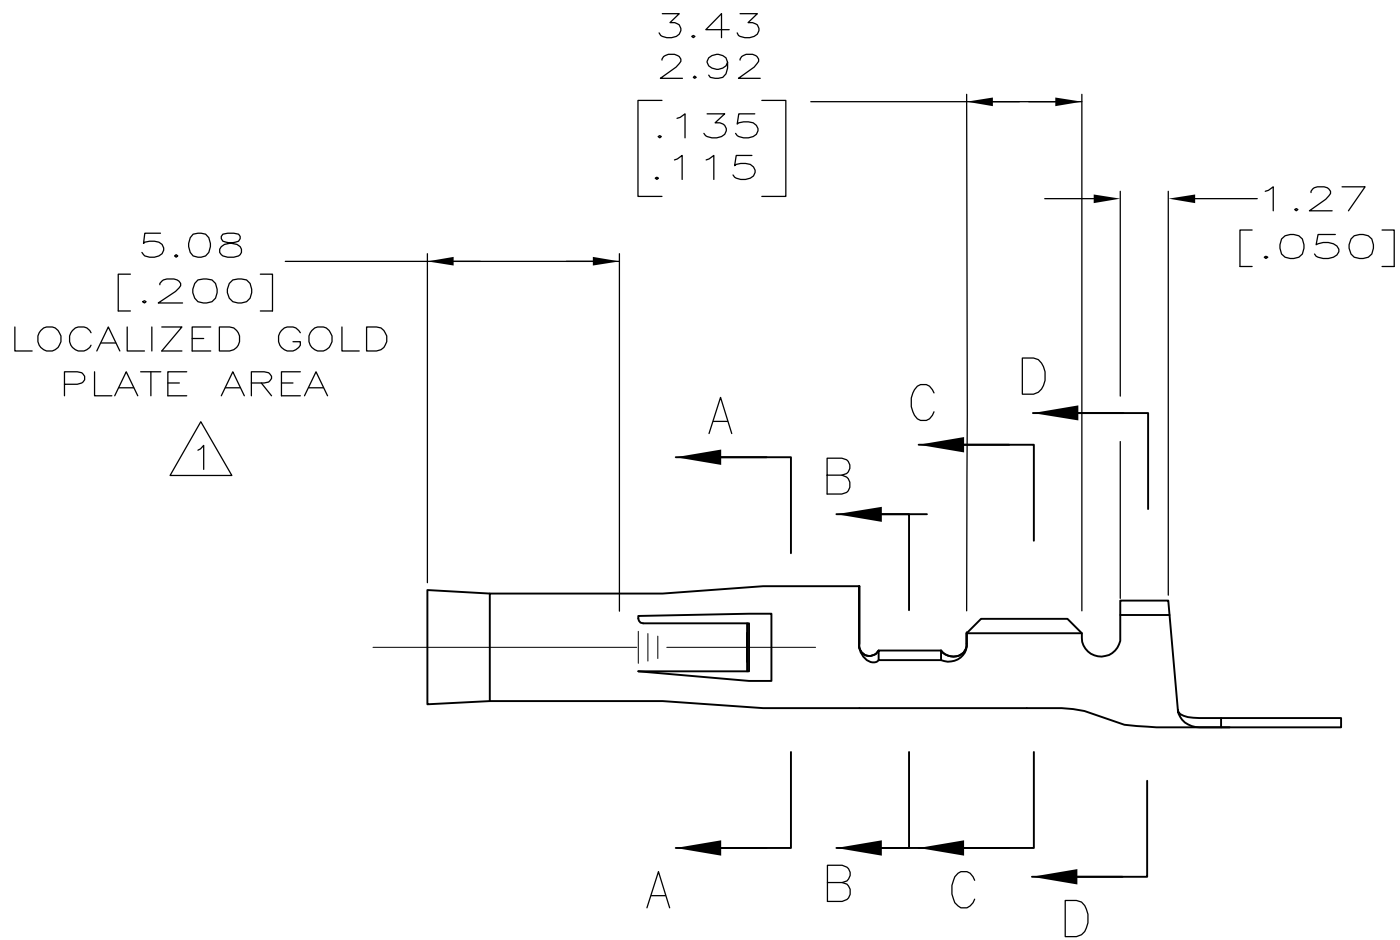

- 1 0.000762 [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA OVER 0.00127 [.000050] MIN NICKEL.
- 2 WIRE RANGE: 0.3 – 0.84mm² (24–18 AWG).
- 3 INSULATION RANGE: 2.79 [.110] MAX. DIA.
- 4 DIMENSIONS IN BRACKETS ARE IN INCHES.

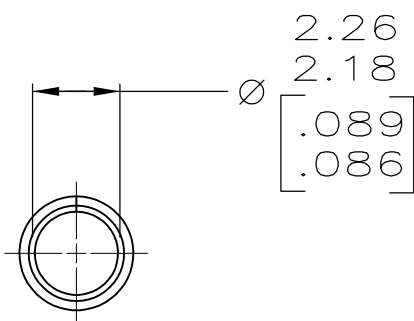

METRIC

GOLD STRIPE	0.25 [.010] BRASS	350417-5
1	0.25 [.010] BRASS	350417-3
PRE-TIN	0.25 [.010] BRASS	350417-1
FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 22NOV2005	TE Connectivity	
		CHK D. COLEY 22NOV2005		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. COLEY 22NOV2005	NAME	.093 SOCKET COMMERCIAL PIN AND SOCKET
	0. PLC ± -	PRODUCT SPEC	SIZE	100779C=350417
	1. PLC ± -	APPLICATION SPEC	CAGE CODE	1
MATERIAL SEE TABLE	2. PLC ± -	WEIGHT	DRAWING NO	1
	3. PLC ± 0.13 [.005]	CUSTOMER DRAWING	SCALE	5:1
		4. PLC ± - ± 0°30'	SHEET	1
		ANGLES	OF	1
		FINISH	REV	AP2