


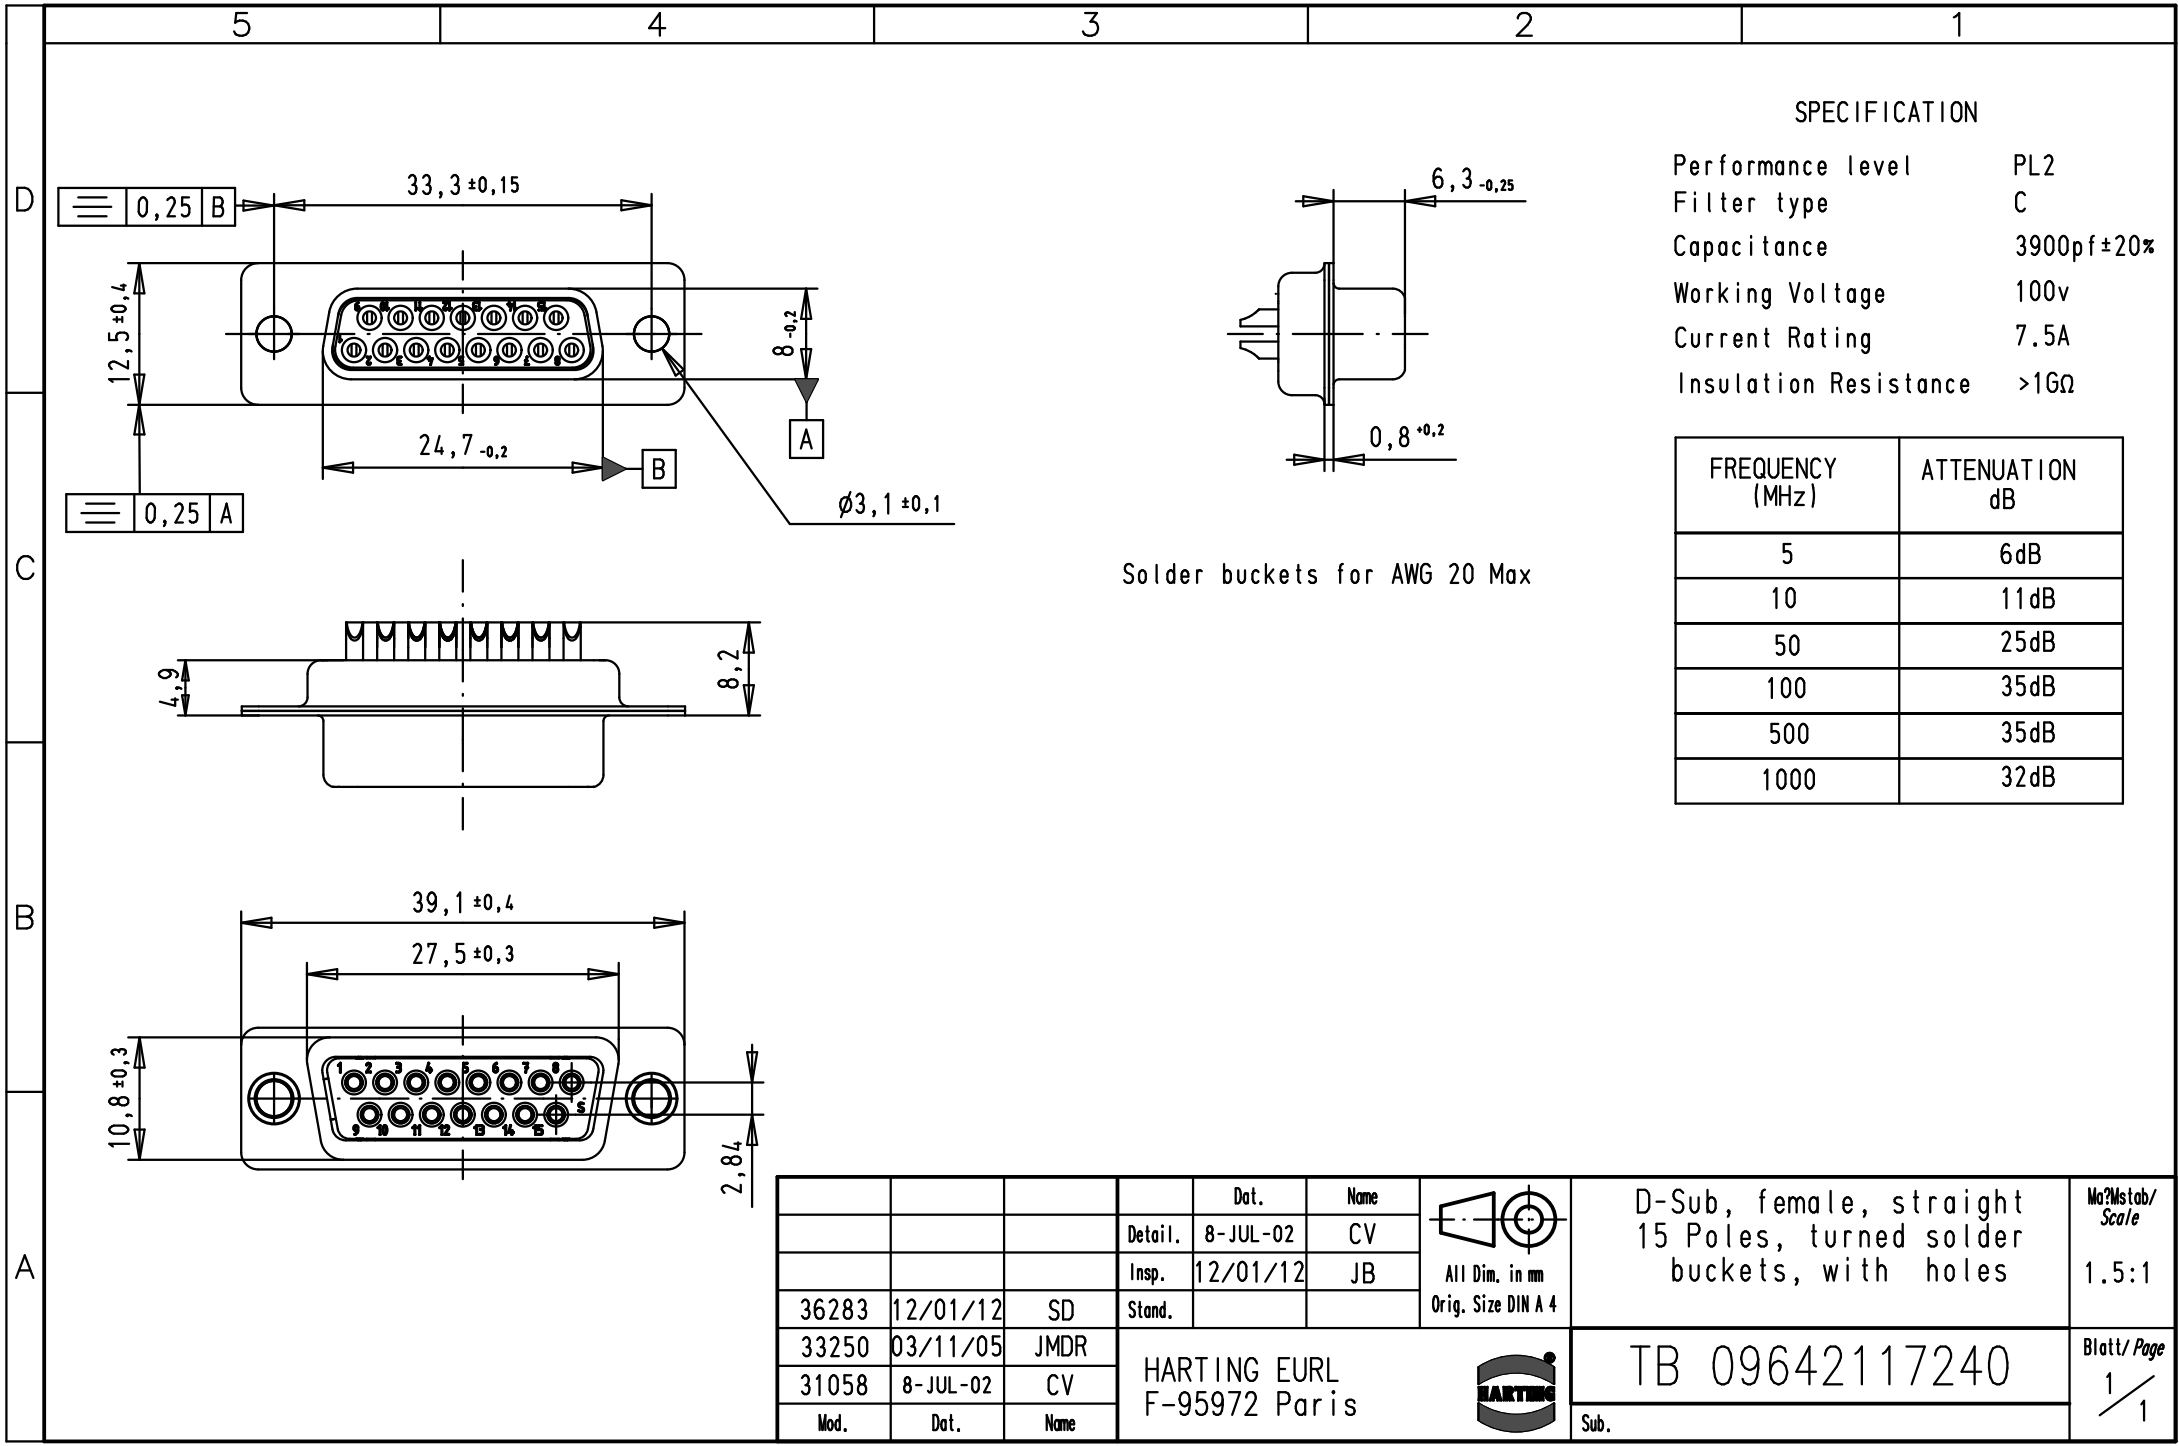


SPECIFICATION

Performance level	PL2
Filter type	C
Capacitance	3900pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	6dB
10	11dB
50	25dB
100	35dB
500	35dB
1000	32dB

Solder buckets for AWG 20 Max

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4
			Detail.	8-JUL-02	CV	
			Insp.	12/01/12	JB	
			Stand.			
36283	12/01/12	SD	HARTING EURL F-95972 Paris			
33250	03/11/05	JMDR				
31058	8-JUL-02	CV				
Mod.	Dat.	Name				

D-Sub, female, straight 15 Poles, turned solder buckets, with holes		Mo?Mstab/ Scale
		1.5:1
TB 09642117240		Blatt/ Page
		1 / 1