

5

4

3

2



1

D

C

B


A

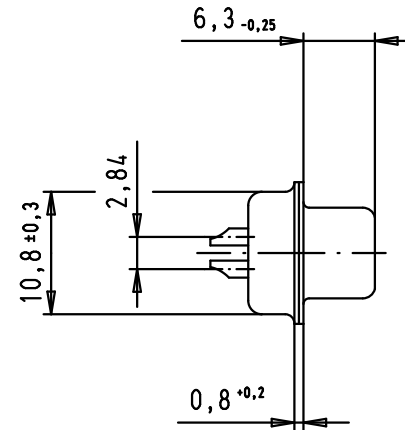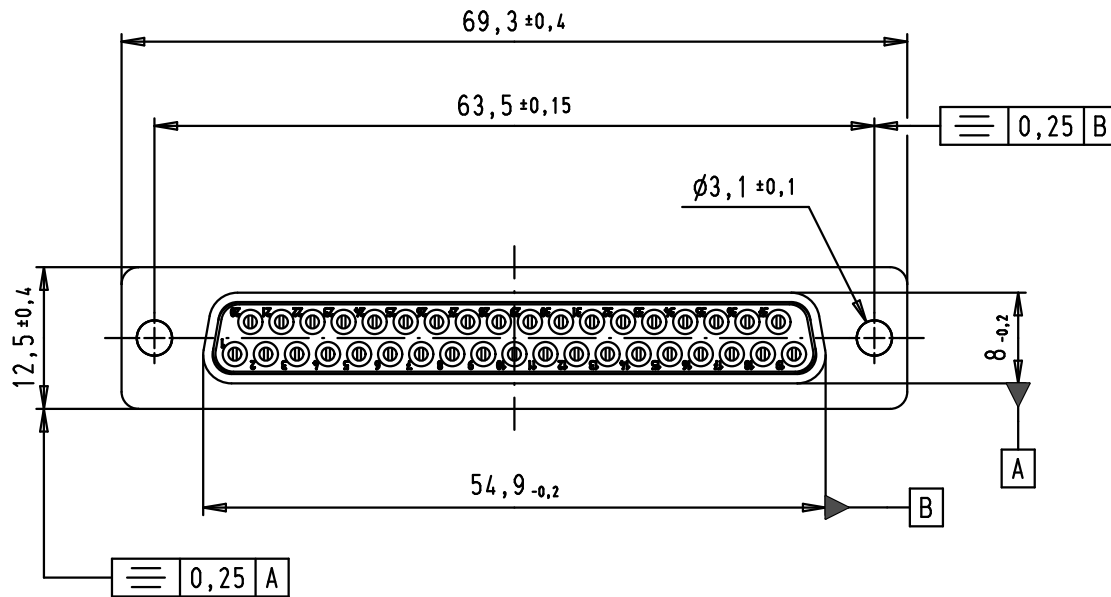


SPECIFICATIONS

Performance level	PL2
Filter type	C
Capacitance	47 pF $\pm$ 20%
Working voltage	100 V
Current rating	7,5 A
Insulation resistance	>1 G Ω

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	-
50	-
100	-
500	30
1000	35

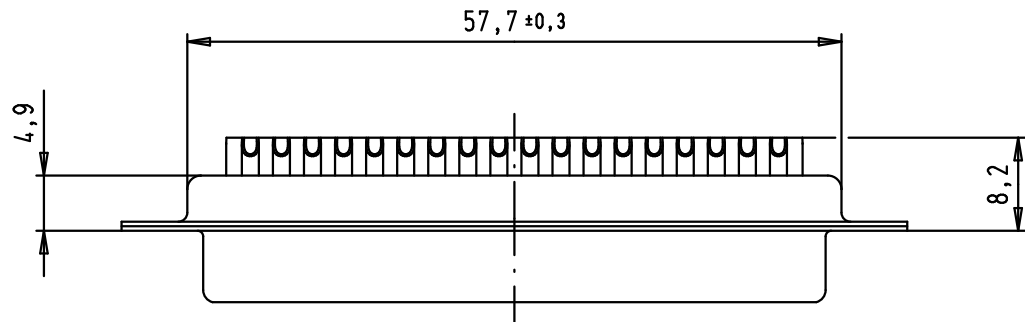

Solder buckets for AWG 20

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, female, straight, 37 poles, turned solder buckets	Maßstab/ Scale 1,5:1
			Detail.	08/07/02	CV			
36283	12/01/12	SD	Insp.	12/01/12	JB			
35300	01/12/08	PK	Stand.					
33800	18/08/06	PK					TB 09 64 411 7210	Blatt/ Page 1 / 1
31058	08/07/02	CV						
Mod.	Dat.	Name						

HARTING EURL
F-95972 Paris

Sub.