


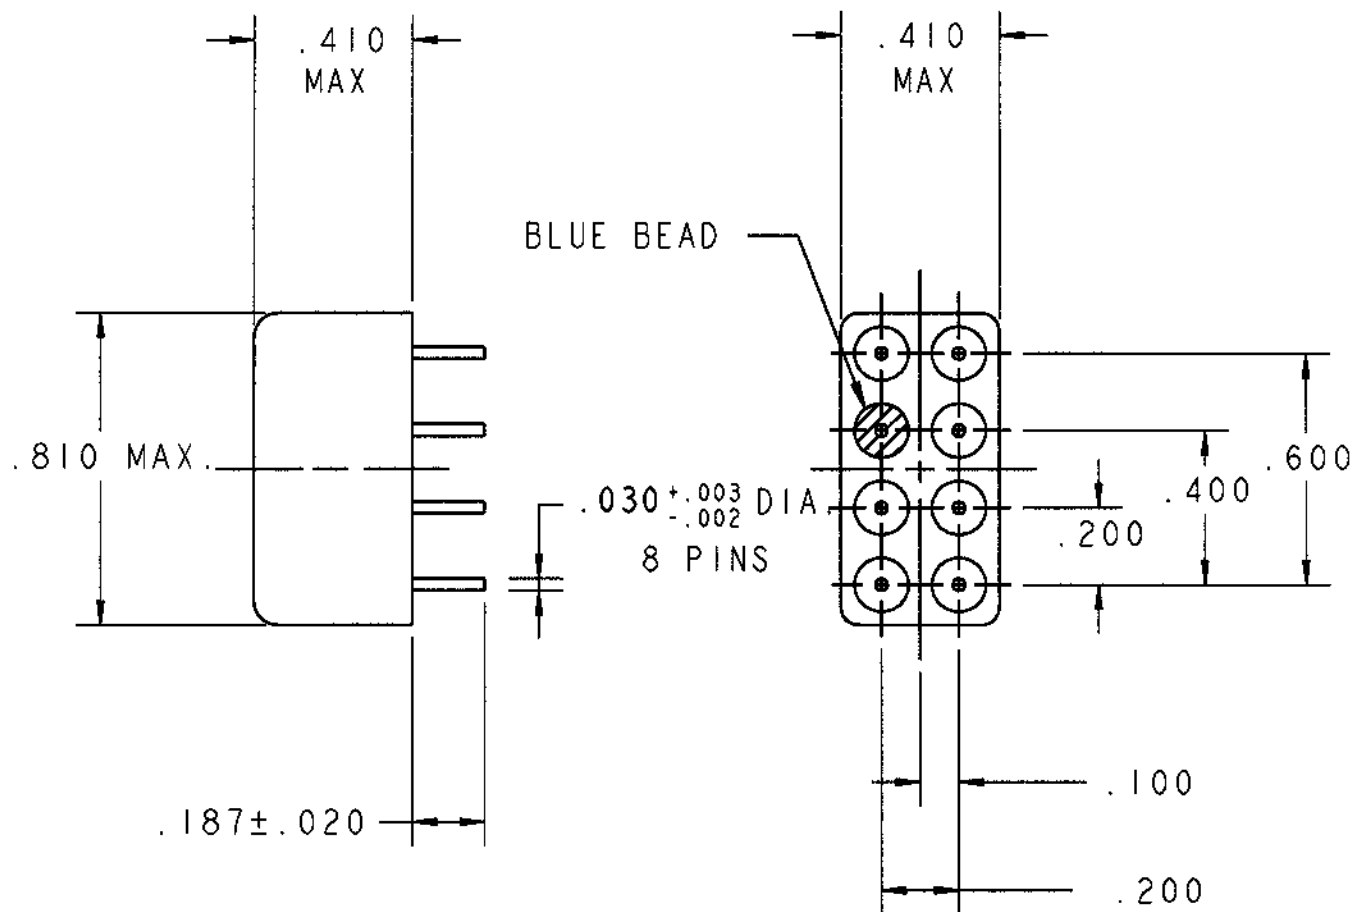

REV. 0


DCO 17259

COIL: @ 25°C	
RESISTANCE	1620 OHMS ±10%
NOMINAL VOLTAGE	30.0 VDC
MUST OPERATE	14.3 VDC
MUST RELEASE	8.6 VDC MAX, 1.4 VDC MIN.

ENVIRONMENT:

VIBRATION	10	CPS TO	2500	CPS @	20	g's
SHOCK	50	g's	11	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		
NOTES:	OPERATE 6 MS MAX					
	RELEASE 5 MS MAX					
	CONTACT STABILIZATION 2.5 MS MAX					

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: 2 AMPS 28 VDC
 0.1 AMP 115 VAC RESISTIVE 0.5 AMPS
 28 VDC INDUCTIVE 100,000 OPERATIONS

DR. ASB 9/06/01 CK. TLG 9-6-01

CII Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M39016/44-053P REV.

"HMS" RELAY

HMS1201S118P