




RECOMMENDED MOUNTING HOLE PATTERN  
FOR 1.57 [.062] THICK P.C. BOARD

- 1 PARTS COMPLY TO TYCO ELECTRONICS SOLDERABILITY SPECIFICATION 109-11-2.
- 2 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 3 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 4 FLAMMABILITY UL V-0 FOR THICKNESS 0.4, 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-11-10.
- 5 GLOW WIRE FLAMMABILITY (GWI): 960°C FOR THICKNESS 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-2-12.
- 6 GLOW WIRE IGNITION (GWI): 825°C FOR THICKNESS 0.45, 800°C FOR THICKNESS 0.8, 775°C FOR THICKNESS 1.6 AND 3.0 PER IEC 60695-2-13.

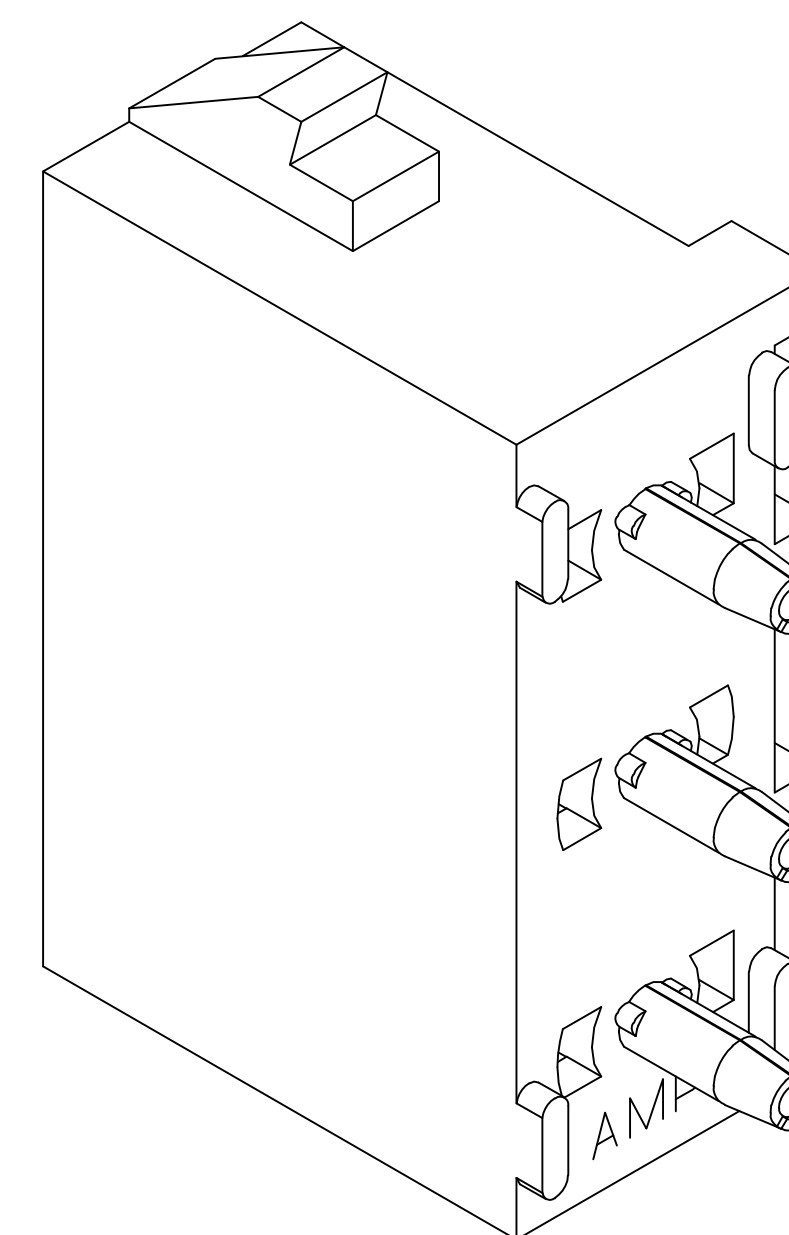

### 3-DIMENSIONAL MODEL NTS

PHOSPHOR BRONZE, PRE-TIN		NYLON, UL V-0 GW, NATURAL		1969800-1	
PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL		PART NO	
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG 280C2015 <b>BASVESH WARAD</b> CHK 280C2015 <b>WICKES, EVAN</b> APVD 280C2015 <b>WICKES, EVAN</b>		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLD ± - 1 PLD ± - 2 PLD ± 0.13 [0.005] 3 PLD ± - 4 PLD ± - ANGLES ± 0.3°		NAME SOCKET HEADER ASSEMBLY, 3 CIRCUIT UNIVERSAL MATE-N-LOK(TM)	
		PRODUCT SPEC — APPLICATION SPEC —		SIZE CAGE CODE DRAWING NO A1 00779 C=1969800	
MATERIAL SEE TABLE		FINISH SEE TABLE		RESTRICTED TO —	
CUSTOMER DRAWING		SCALE 5:1		SHEET 1 of 1 REV A	