

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0527931370

Status:

Active

Overview:

Description:

1.00mm (.039") Pitch Right Angle, SMT, Non-ZIF, Top Contact Style, 13 Circuits, Lead-free

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

52793Series

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

FFC/FPC Connectors

Series

52793

Overview

ffc_fpc_smt

Product Name

N/A

Physical

Circuits (Loaded)

13

Contact Position

Top

Durability (mating cycles max)

10

Entry Angle

90° Angle

Flammability

94V-0

Mated Height (in)

0.122 In

Mated Height (mm)

3.10 mm

Material - Metal

Phosphor Bronze

Material - Plating Mating

Tin-Bismuth

Material - Plating Termination

Tin-Bismuth

Number of Rows

1

Orientation

Right Angle

PCB Locator

No

PCB Retention

Yes

Packaging Type

Embossed Tape on Reel

Pitch - Mating Interface (in)

0.039 In

Pitch - Mating Interface (mm)

1.00 mm

Plating min: Mating (µin)

40

Plating min: Mating (µm)

1

Plating min: Termination (µin)

40

Plating min: Termination (µm)

1

Polarized to PCB

No

Stackable

No

Temperature Range - Operating

-20°C to +85°C

Termination Interface: Style

Surface Mount

Wire/Cable Type

FFC/FPC

Electrical

Current - Maximum per Contact

0.5A

Voltage - Maximum

50V

Material Info

Reference - Drawing Numbers

Packaging Specification

SPK-52793-001

Product Specification

PS-52793-014, RPS-52793-016, RPS-52793-018, RPS-52793-019, RPS-52793-020, RPS-52793-021, RPS-52793-024

Sales Drawing




SD-52793-011, SD-52793-012

This document was generated on 06/05/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

DWG. NO.
SD-52793-011


DO NOT SCALE DRAWING

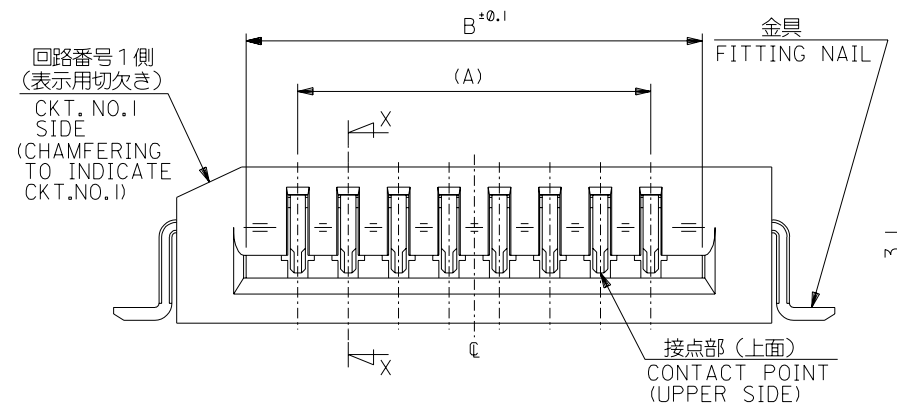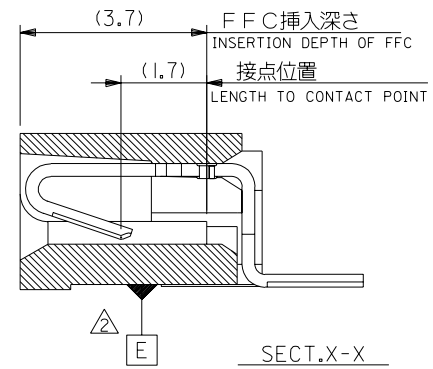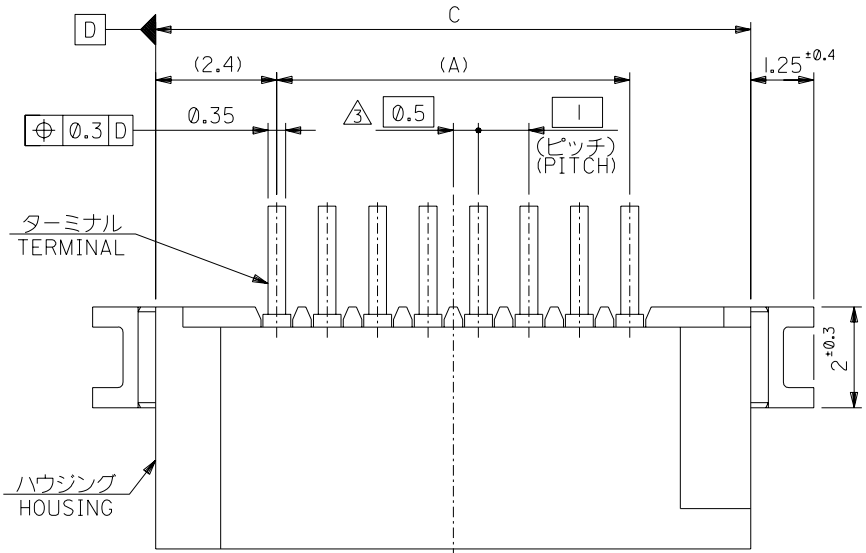

33.8	31.05	29	52793-3019	30
32.8	30.05	28	-2919	29
31.8	29.05	27	-2819	28
30.8	28.05	26	-2719	27
29.8	27.05	25	-2619	26
28.8	26.05	24	-2519	25
27.8	25.05	23	-2419	24
26.8	24.05	22	-2319	23
25.8	23.05	21	-2219	22
24.8	22.05	20	-2119	21
23.8	21.05	19	-2019	20
22.8	20.05	18	-1919	19
21.8	19.05	17	-1819	18
20.8	18.05	16	-1719	17
19.8	17.05	15	-1619	16
18.8	16.05	14	-1519	15
17.8	15.05	13	-1419	14
16.8	14.05	12	-1319	13
15.8	13.05	11	-1219	12
14.8	12.05	10	-1119	11
13.8	11.05	9	-1019	10
12.8	10.05	8	-0919	9
11.8	9.05	7	-0819	8
10.8	8.05	6	-0719	7
9.8	7.05	5	-0619	6
8.8	6.05	4	-0519	5
7.8	5.05	3	-0419	4
6.8	4.05	2	52793-0319	3
C	B	A	MATERIAL NO	極数 CIRCUIT

EC NO. DRWN: CH'K: APPR:	EC NO. DRWN: CH'K: APPR:	EC NO. DRWN: CH'K: APPR:	EC NO. DRWN: CH'K: APPR:	RELEASED EC NO. J2004-1419 DRWN: H.KAWABATA '03/12/09 CH'K: K.TOJO '03/12/09 APPR: H. Saito '03/12/09	MATERIAL 材料 FINISH 仕上げ WIRE RANGE 適用電線範囲 INS. RANGE 被覆外径	DESCRIPTION 記号参照 SEE NOTES // // //	GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差 10 UNDER 未満 ±0.2 10 OVER 30 UNDER 未満 ±0.25 30 OVER 以上 ±0.3 ANGLE 角度 ±3°	SCALE 10:1	DESIGN UNITS mm INCH	DRAWN BY & DATE H.KAWABATA '03/12/09 CHECKED BY & DATE K.TOJO '03/12/09 APPROVED BY & DATE H. Saito '03/12/09 CAD FILENAME SD-52793-011.S01	TITLE: 1.0 FFC CONN. NON ZIF SMT R/A (UPPER CONTACT) -LEAD FREE- MOLEX MOLEX INCORPORATED	MATERIAL NO. 52793-***19	DRAWING NO. SD-52793-011	SHEET NO. 1 OF 2	SIZE B
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.															EN-02J(097) MXJ-54


DWG. NO. SD-52793-011
F
D
V
C
B
DO NOT SCALE DRAWING

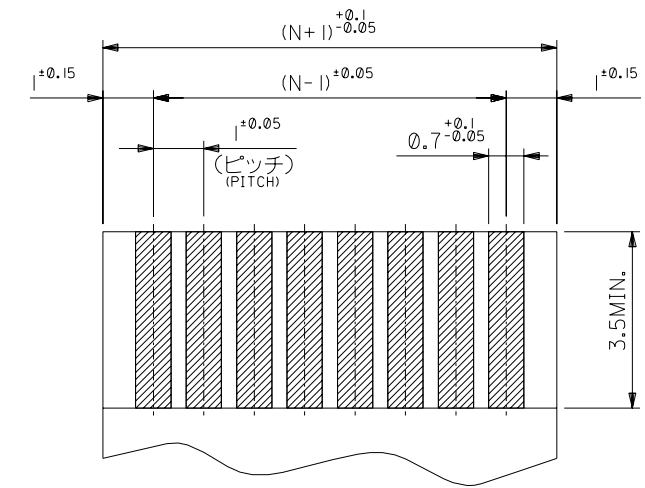

(仕上がり厚さ0.3±0.03)
THICKNESS
適合FPC推奨寸法
APPLICABLE FPC
RECOMMENDED DIMENSION.

注記 NOTES:

1. 使用材料 MATERIAL
ハウジング : PPS, UL94V-0
ターミナル : リン青銅 (t=0.25)
メッキ : ニッケル下地錫ヒスマメッキ
金具 : リン青銅 (t=0.25)
メッキ : ニッケル下地純銅メッキ
- HOUSING : PPS, UL94V-0
TERMINAL : PHOSPHOR BRONZE
PLATING : Sn-Bi OVER Ni
FITTING NAIL : PHOSPHOR BRONZE
PLATING : Sn OVER Ni
2. 基準面 E からのもルダールとフィッティングネイルの半田付け面のズレ量は、
上方向に0.1MAX. 下方向0.15MAX. とする。
MISALIGNMENT OF SOLDER TAIL AND FITTING NAIL FROM E
: UPPER DIRECTION 0.1 MAX. , LOWER DIRECTION 0.15 MAX.
3. 偶数極に適用。
APPLY FOR EVEN CKT.

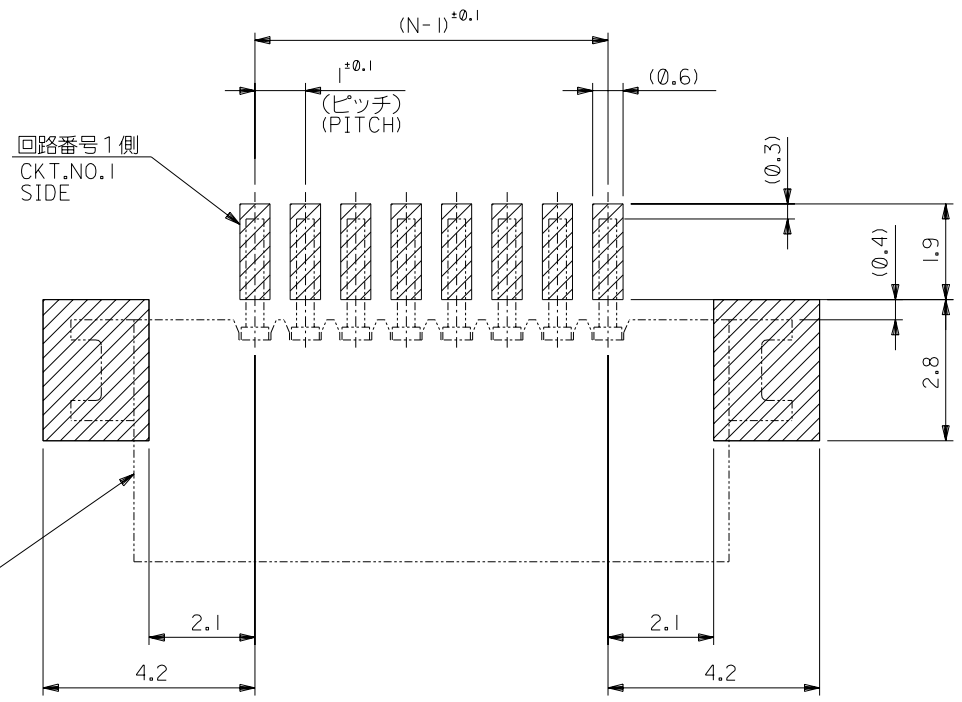

参考基板レイアウト (マウント面)

RECOMMENDED P.C.BOARD
PATTERN DIMENSION. (REF.)
(MOUNTING AREA)

4. 本製品は 52793-**10 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52793-**10

EC NO. DRWN: CHK: APPR:			EC NO. DRWN: CHK: APPR:			EC NO. DRWN: CHK: APPR:			EC NO. DRWN: CHK: APPR:			SEE SHEET 1 OF 2			DESCRIPTION MATERIAL 材料 FINISH 仕上り WIRE RANGE 適用電線範囲 INS. RANGE 被覆外径			注記参照 SEE NOTES // // // //			GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差			SCALE 10:1			DESIGN UNITS ☒ mm ☐ INCH			THIRD ANGLE PROJECTION			☐ mm ☐ INCH ☒ mm ONLY			REVISE ON CAD ONLY		
												DRAWN BY & DATE H.KAWABATA '03/12/09									TITLE: 1.0 FFC CONN. NON ZIF SMT R/A (UPPER CONTACT) -LEAD FREE-			MOLEX INCORPORATED														
												CHECKED BY & DATE K.TOJO '03/12/09																										
												APPROVED BY & DATE H. Sasao '03/12/09																										
															ANGLE 角度			CAD FILENAME SD-52793-011.S02			MATERIAL NO. 52793-**-19			DRAWING NO. SD-52793-011			SHEET NO. 2 OF 2											
															THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.															SIZE B								

SD-52793-011.502

10 9 8 7 6 5 4 3 2 1

F


E

D

C

B


A

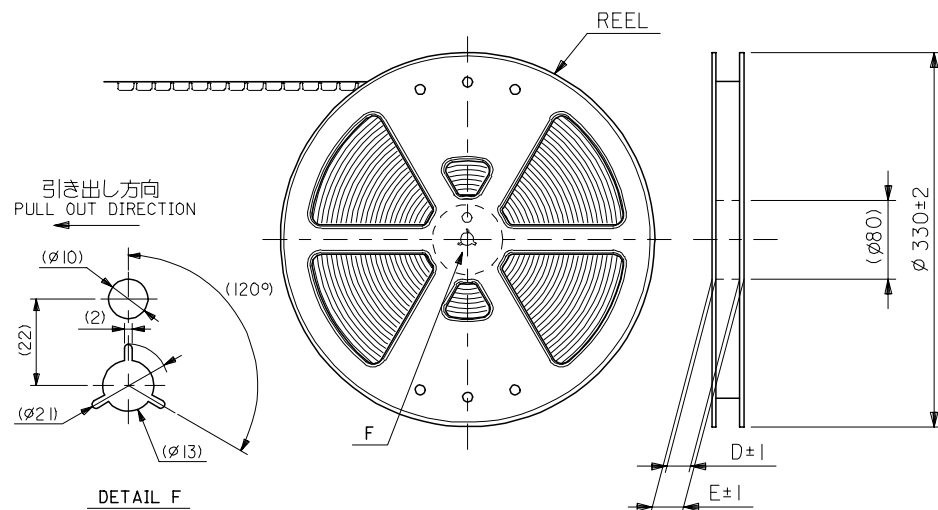


NOTES

- 製品詳細寸法については 製品単体図面 を参照下さい。
RE DETAILED DIMENSION, SEE SALES DRAWING FOR CONNECTOR.
- 梱包数量：1000個/リール
NUMBER OF CONNECTORS：1000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

引き出し方向
PULL OUT DIRECTION

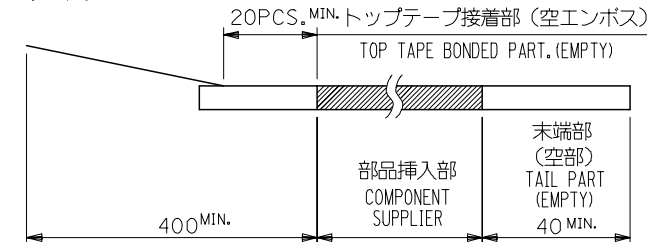


- トップテープの剥離強度：0.1-1.3 N(10-130gf) (剥離方向は下図参照)
尚、本規格値は出荷時に適用。(但し、輸送時に剥離が発生しないこと。)
PEELING OFF FORCE OF TOP TAPE：0.1-1.3 N(10-130gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION.



- 材料(MATERIAL)
キャリアテープ(CARRIER TAPE)：ポリプロピレン(POLYPROPYLENE)
トップテープ(TOPTAPE)：PET、PE、PEF
リール(REEL)：ポリスチレン(PS) <リサイクル材を含む>
POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>
- 本製品は 52793-***90 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52793-***90


52793-***90 MODEL NO.

REVISED EC NO: J2006-0384 DRAWN BY: DAISUKE YODA CHKD BY: K. TOYODA APPR: NUKI ITO	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	±0.2	DRAWN BY M. NAGATA	DATE '03/12/09	TITLE 1.0 FFC CONN. NON ZIF SMT RA EMBSTP PKG -LEAD FREE-		
		10 OVER 30 UNDER	±0.25	CHECKED BY K. TOJO	DATE '03/12/09			
		30 OVER	±0.3	APPROVED BY M. SASAO	DATE '03/12/09			
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.	SHEET NO.	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-52793-012		
REV	SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

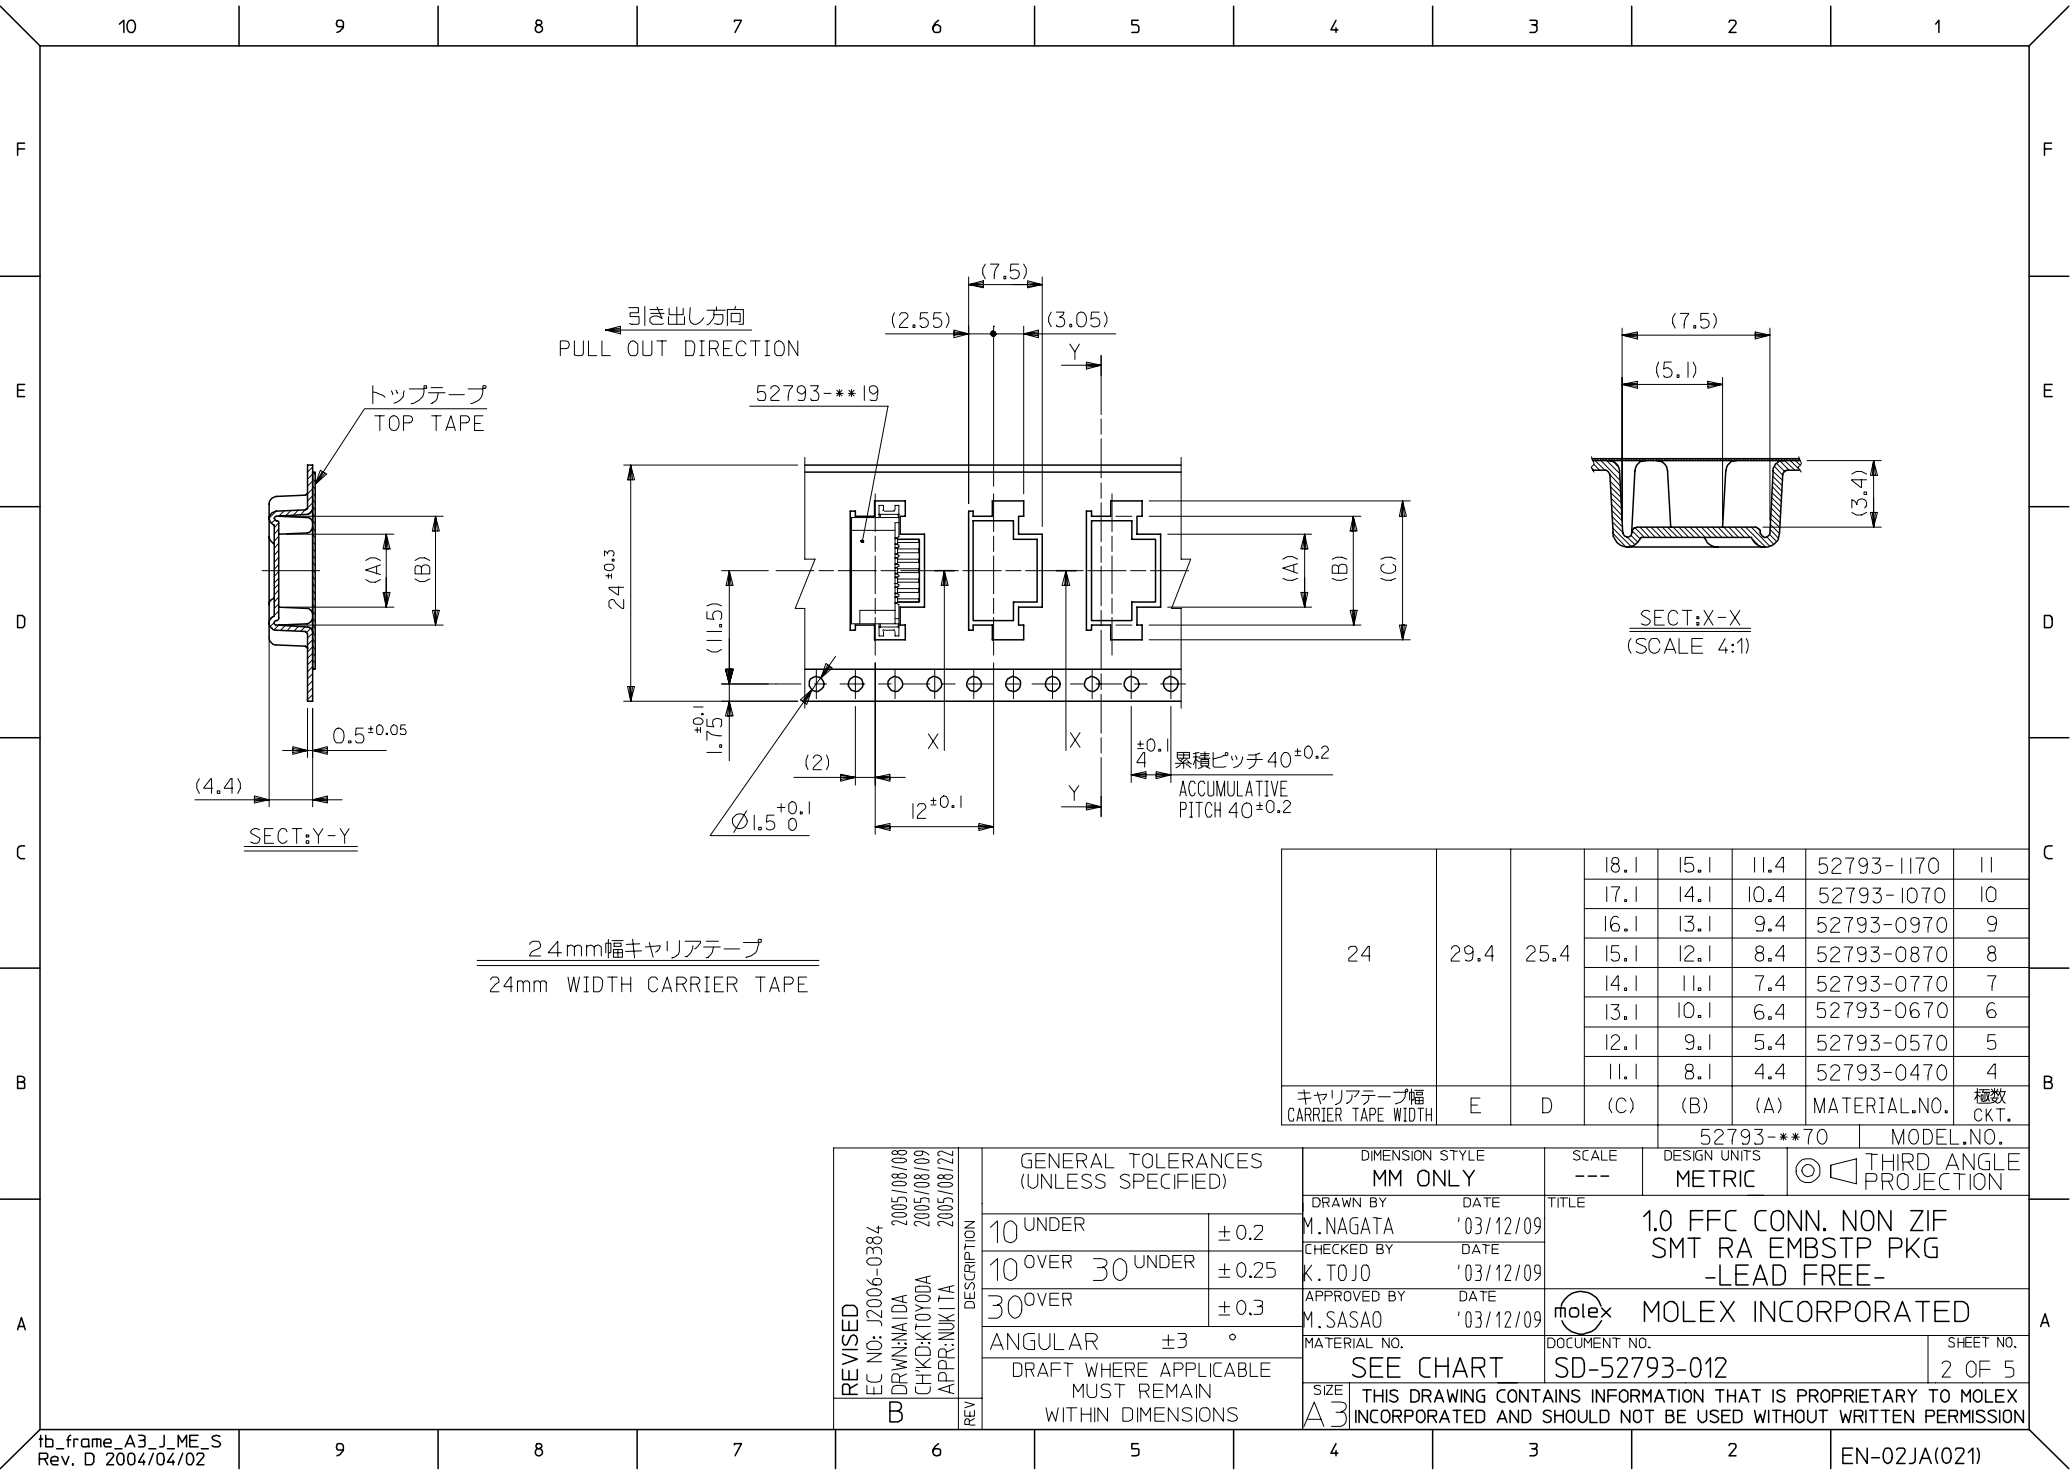

24	29.4	25.4	18.1	15.1	11.4	52793-1170	11
			17.1	14.1	10.4	52793-1070	10
			16.1	13.1	9.4	52793-0970	9
			15.1	12.1	8.4	52793-0870	8
			14.1	11.1	7.4	52793-0770	7
			13.1	10.1	6.4	52793-0670	6
			12.1	9.1	5.4	52793-0570	5
			11.1	8.1	4.4	52793-0470	4
キャリアテープ幅 CARRIER TAPE WIDTH	E	D	(C)	(B)	(A)	MATERIAL.NO.	極数 CKT.


REVISED EC NO: J2006-0384 DRWN: AIDA CHKD: KTOYODA APPR: NUKITA 2005/08/08 2005/08/09 2005/08/22	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY M. NAGATA	DATE '03/12/09	TITLE 1.0 FFC CONN. NON ZIF SMT RA EMBSTP PKG -LEAD FREE-				
		10 OVER 30 UNDER	±0.25	CHECKED BY K. TOJO	DATE '03/12/09					
		30 OVER	±0.3	APPROVED BY M. SASAO	DATE '03/12/09	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-52793-012		2 OF 5		
	REV		SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							



32mm幅キャリアテープ

52793-70	MODEL NO.
----------	-----------


tb_frame_A3_J_ME_S
Rev. D 2004/04/02

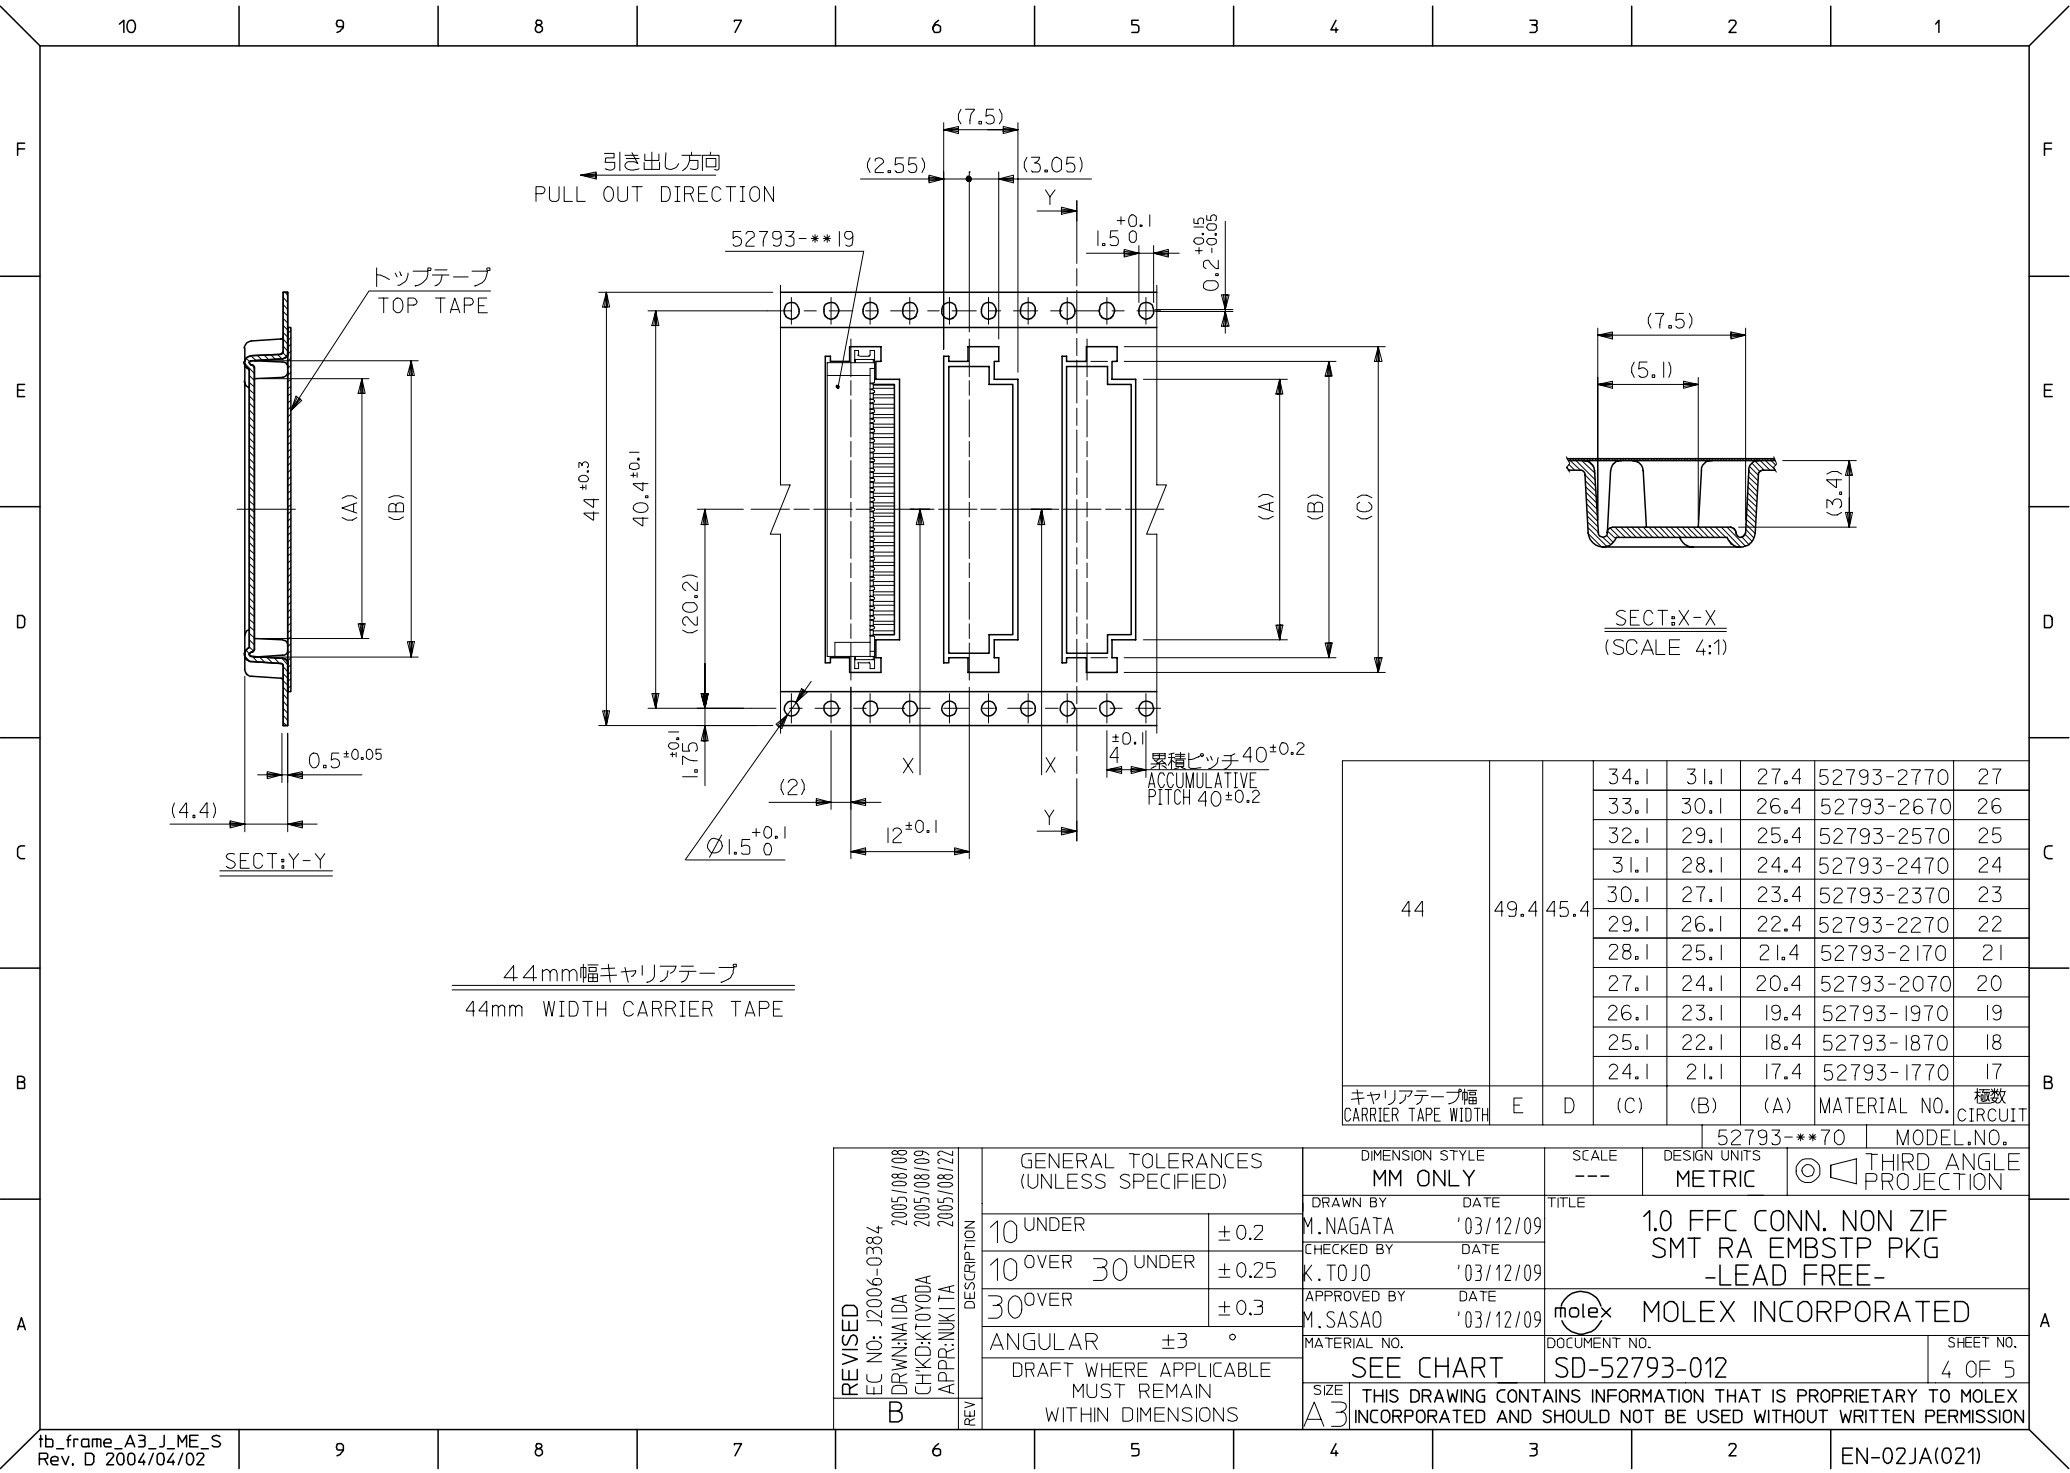

44mm幅キャリアテープ
44mm WIDTH CARRIER TAPE

44	49.4	45.4	34.1	31.1	27.4	52793-2770	27
			33.1	30.1	26.4	52793-2670	26
			32.1	29.1	25.4	52793-2570	25
			31.1	28.1	24.4	52793-2470	24
			30.1	27.1	23.4	52793-2370	23
			29.1	26.1	22.4	52793-2270	22
			28.1	25.1	21.4	52793-2170	21
			27.1	24.1	20.4	52793-2070	20
			26.1	23.1	19.4	52793-1970	19
			25.1	22.1	18.4	52793-1870	18
			24.1	21.1	17.4	52793-1770	17
キャリアテープ幅 CARRIER TAPE WIDTH	E	D	(C)	(B)	(A)	MATERIAL NO.	極数 CIRCUIT

REVISED EC NO: J2006-0384 B	2005/08/08 2005/08/09 2005/08/22	DRWN:NAIDA CHKD:KTOYODA APPR:NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
				10 UNDER	± 0.2	M. NAGATA	'03/12/09	1.0 FFC CONN. NON ZIF SMT RA EMBSTP PKG -LEAD FREE-				
				10 OVER 30 UNDER	± 0.25	CHECKED BY K. TOJO	'03/12/09					
				30 OVER	± 0.3	APPROVED BY M. SASAO	'03/12/09	 MOLEX INCORPORATED				
				ANGULAR ±3 °		MATERIAL NO.			DOCUMENT NO.		SHEET NO. 4 OF 5	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART			SD-52793-012			
						SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					



EN-02JA(021)