



DIMENSIONS: Inch[mm]
CO-PLANARITY: 0.004[0.10]
TOLERANCES: ±0.005 INCH IF NOT SPECIFIED

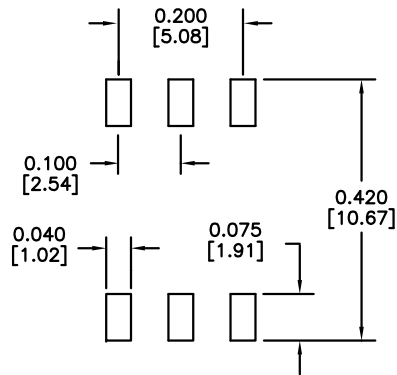

PART NO. : TG01-7856NSL F

6PIN SMT GATE DRIVE TRANSFORMER
LEAD-FREE/ROHS COMPLIANT
COMPATIBLE TO LEAD-FREE SOLDERING PROCESS
CONDITION PER IPC/JEDEC J-STD-020C
UL/EN60950 AND DEMKO RECOGNIZED
OPERATING TEMPERATURE -40/+85°C

ELECTRICAL SPECIFICATIONS @25°C

URNS RATIO	
P1-3:P6-4	1:1
ET CONSTANT P1-3	12V-μs min ¹
OCL P1-P3	785μH min
LL P1-P3	0.3μH max
DCR P1-P3	0.6 Ω max
P4-P6	0.6 Ω max
Cw/w	25pF max
ISOLATION	1,500Vrms

1. MINIMUM ET CONSTANT OVER OPERATING TEMPERATURES.

RECOMMENDED SOLDER PAD DIMENSIONS



HALO/PBL

TITLE	SMT TRANSFORMER		SIGNATURES	DATE	REV.	DESC.	DATE						
	FOR	GATE DRIVE						DRAWN	LI ZHI ZHONG	9/4/14	A	FIRST ISSUE	9/4/14
	PART NO.	TG01-7856NSL F						CHECKED	LEI KEONG	10/10/14	B	PROD. RELEASE	10/10/14
SCALE	NONE	PAGE	1 OF 1	APPROVED	PETER LU	10/10/14							
FILE				7856NSL F.DWG									

CALIFORNIA, USA
KOWLOON, HONG KONG
SINGAPORE