

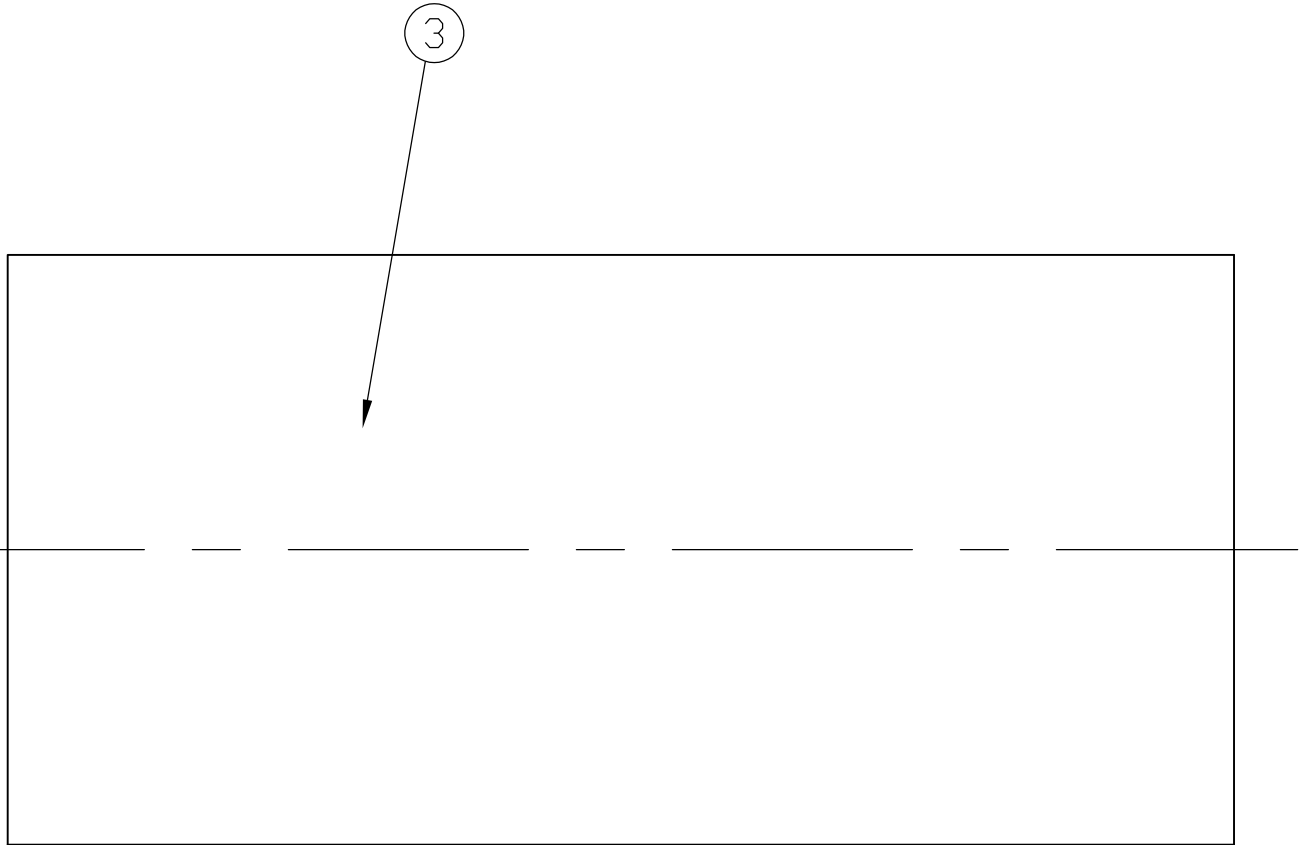


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	—		F1	REVISED PER ECO-11-005030	11MAR11	RK	HMR

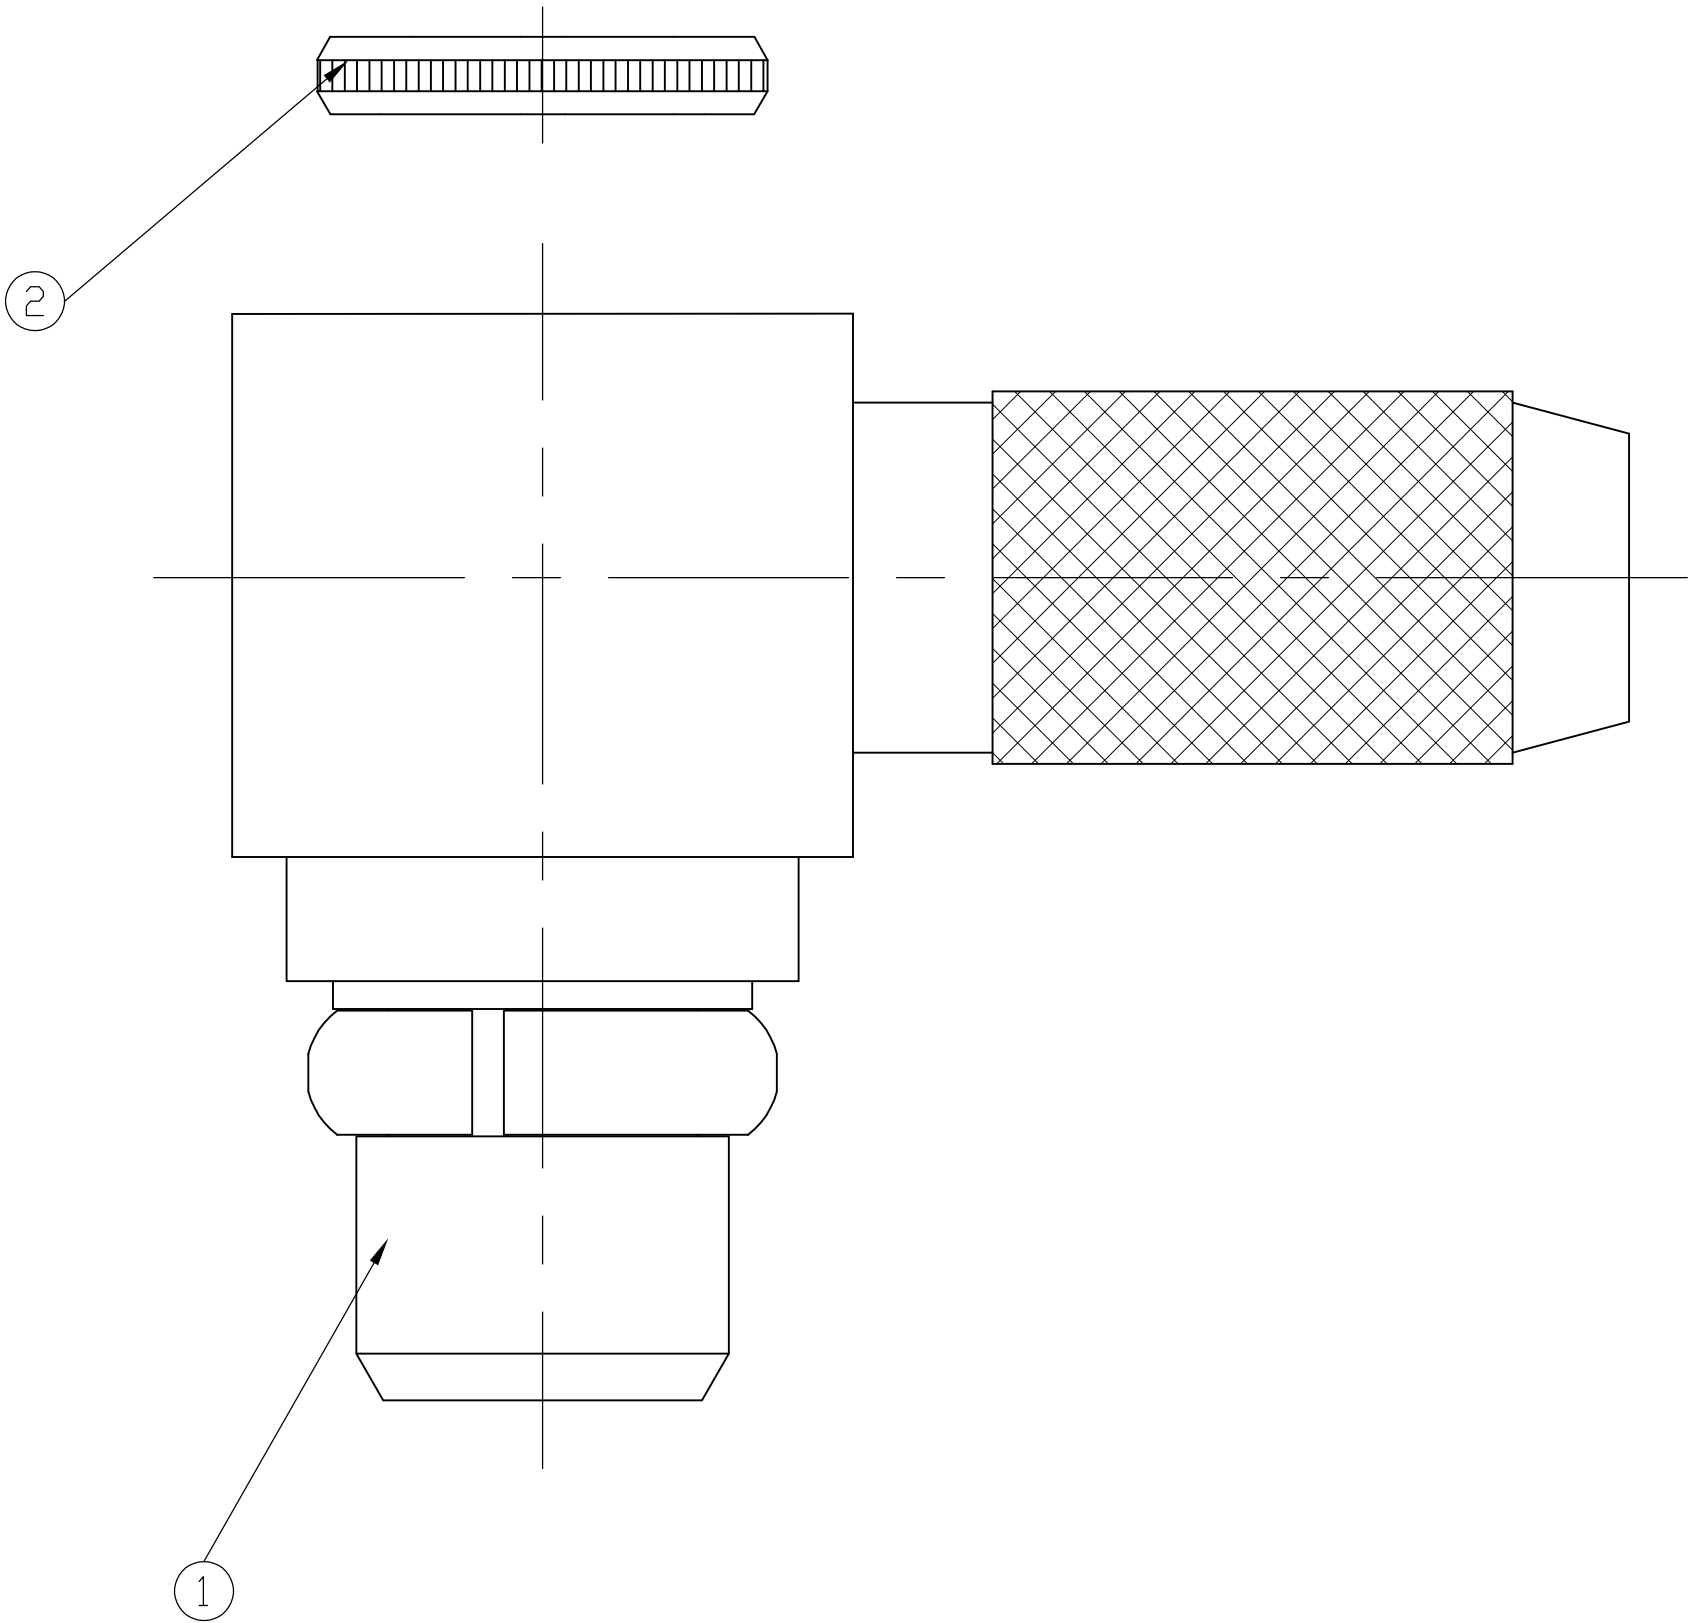

1. ITEMS 1, 2, 3, AND 4 PACKAGED UNASSEMBLED
- △₂ CRIMP REQUIREMENTS: FERRULE 2.67 [.105] HEX
- △₃ CRIMP REQUIREMENTS: FERRULE 3.25 [.128] HEX
- △₄ CRIMP REQUIREMENTS: FERRULE 3.86 [.152] HEX
5. ITEM 4 NOT SHOWN

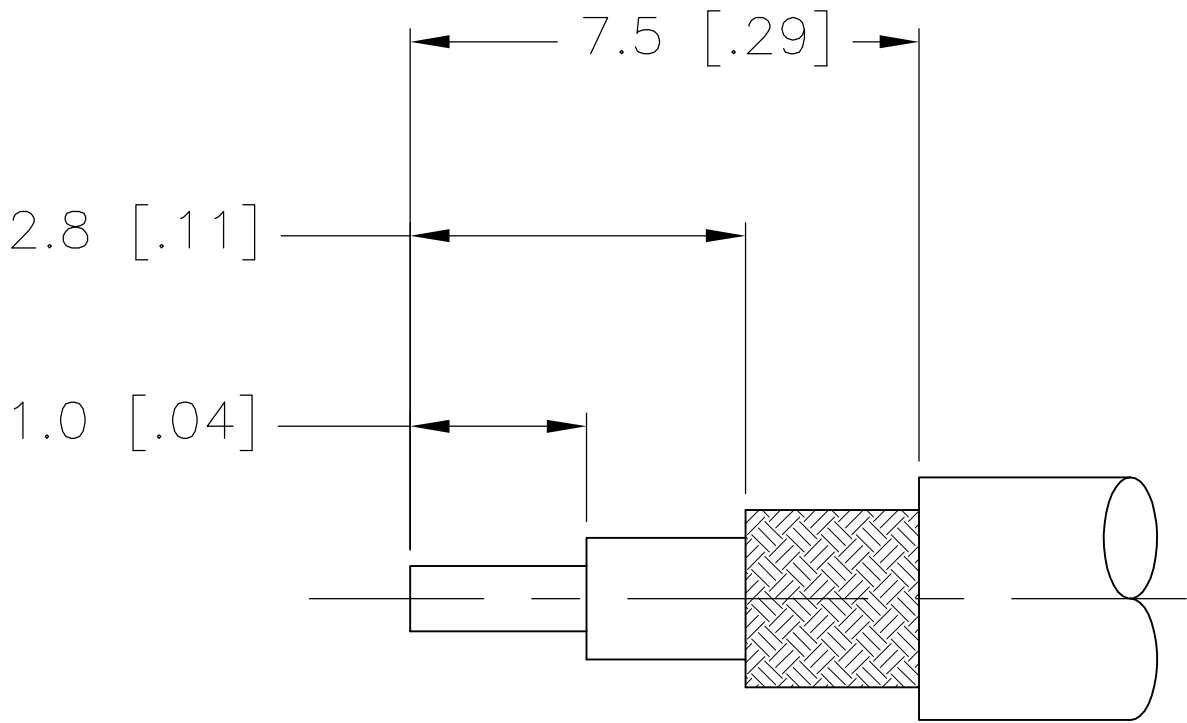

RECOMMENDED CABLE STRIP LENGTH
(NTS)

OMNIFLEX 200 △ ₂	1405671-2	8-1403102-5	1408146-2	1408147-2	1408149-4
RD-316 △ ₄	---	3-413889-2	1408146-2	1408147-1	1408149-3
RG-316 △ ₃	---	3-413889-1	1408146-2	1408147-1	1408149-2
RG-178 RG-196 △ ₂	---	3-413889-3	1408146-2	1408147-2	1408149-1
CABLE CRIMP INFO	SHRINK TUBING △ ₄	FERRULE △ ₃	CAP △ ₂	HOUSING ASSY △ ₁	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RMF 19NOV2001	TE Connectivity		
DIMENSIONS: mm		CHK RMF 22OCT00			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD RMF 22OCT00	NAME		
0 PLC ± -		PRODUCT SPEC			
1 PLC ± 0.26 (.010)		108-2084	MMCX RIGHT ANGLE CABLE PLUG-CRIMP		
2 PLC ± 0.13 (.005)		APPLICATION SPEC			
3 PLC ± -		408-8627	SIZE CAGE CODE DRAWING NO		
4 PLC ± -		WEIGHT 0.86g/0.030oz			
ANGLES ± 1°		CUSTOMER DRAWING	A2 00779 C=1408149		
FINISH -		SCALE 20:1	SHEET 1 OF 1		
			REV F1		