

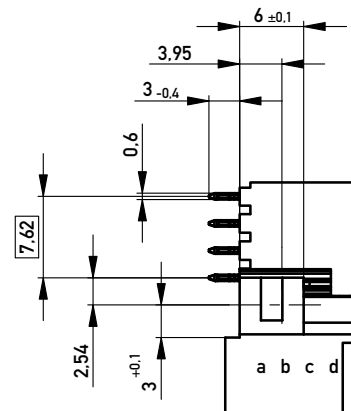


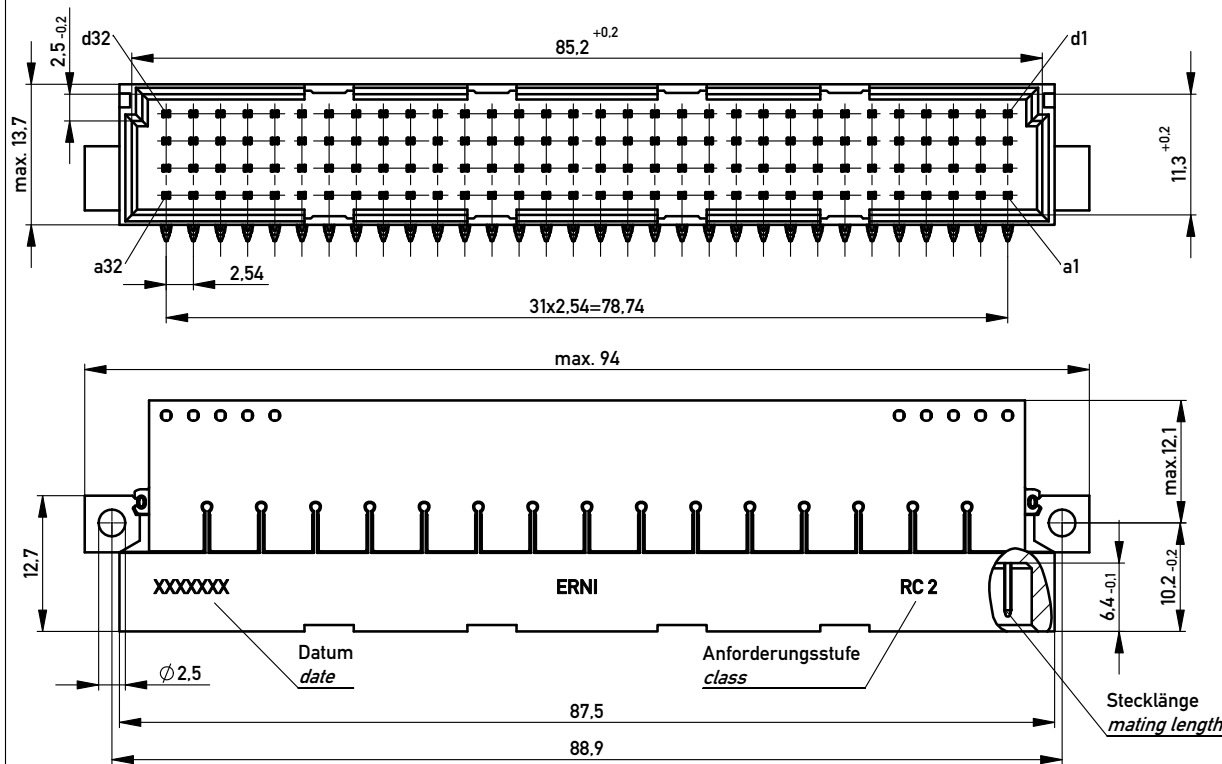


Stecklänge / mating length




E = early mate, late break / voreilend

S = standard

L = late mate, early break / nacheilend

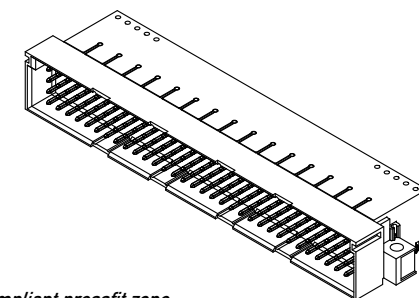

Bestückungsplan / contact layout

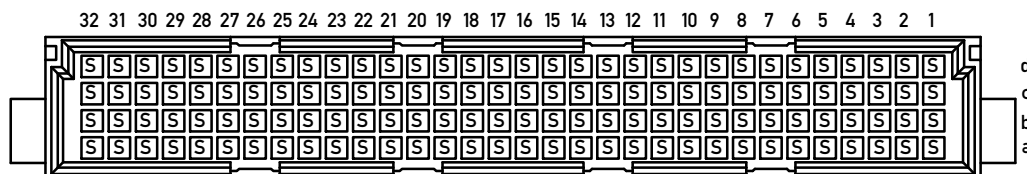

Elastische Einpresszone / compliant pressfit zone

Bauart 4 / type 4

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2


Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung 114124

diameter of drilled hole see drawing 114124

1) $\phi 1.0^{+0.09}_{-0.06}$ Durchmesser des metallisierten Loches

$\phi 1.0^{+0.09}_{-0.06}$ Diameter of finished plated-through hole

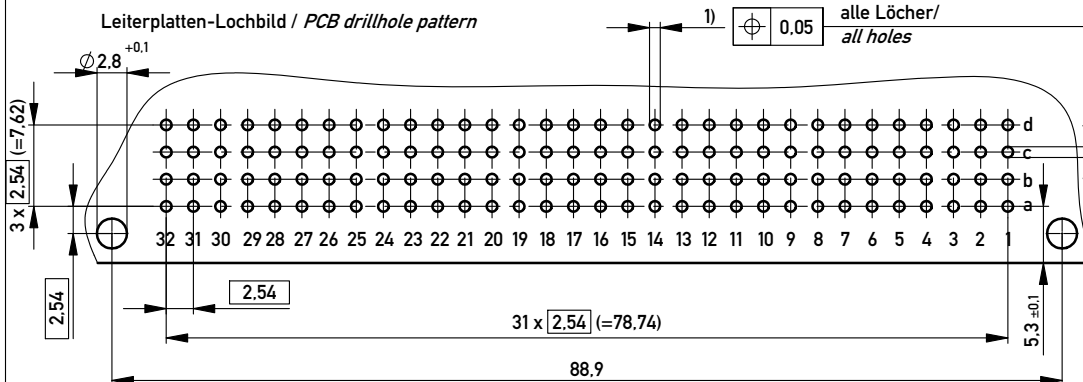

Information:		Tolerances	Scale 2:1		
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.	Designation		
c		10.12.2013	Messerleiste CD128 EE		I
Index		Date	Male Conn. CD128 pressfit		A3
Class		STVCD	384671		

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9006 to be observed.

ERNI www.ERNI.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[384671](#)