

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0527460671

Status:

Active

Overview:

Description:

0.50mm (.020") Pitch FFC/FPC Connector, Right Angle, SMT, ZIF, Bottom Contact Style, 6 Circuits, Lead-free, Gold Contact Plating, High BarrierPackaging

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

52746Series

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

FFC/FPC Connectors

Series

52746

Overview

ffc_fpc_smt

Product Name

N/A

Physical

Circuits (Loaded)

6

Contact Position

Bottom

Durability (mating cycles max)

20

Entry Angle

90° Angle

Flammability

94V-0

Mated Height (in)

0.079 In

Mated Height (mm)

2.00 mm

Material - Metal

Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Gold

Number of Rows

1

Orientation

Right Angle

PCB Locator

No

PCB Retention

Yes

Packaging Type

Embossed Tape on Reel

Pitch - Mating Interface (in)

0.020 In

Pitch - Mating Interface (mm)

0.50 mm

Polarized to PCB

Yes

Stackable

No

Temperature Range - Operating

-20°C to +85°C

Termination Interface: Style

Surface Mount

Wire/Cable Type

FFC/FPC

Electrical

Current - Maximum per Contact

0.5A

Voltage - Maximum

50V

Material Info

Reference - Drawing Numbers

Packaging Specification

SPK-52746-001, SPK-52746-002

Product Specification

PS-52746-015, RPS-52746-017, RPS-52746-050, RPS-52746-051, RPS-52746-053, RPS-52746-054, RPS-52746-056, RPS-52746-057, RPS-52746-059, RPS-52746-060, RPS-52746-062

Sales Drawing

SD-52746-024, SD-52746-025


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

注記 NOTES

1. 製品番号 52746-***39 の梱包状態はアクチュエータがロックした状態とする。
詳細寸法については図面 SD-52746-025 を参照下さい。
IN THE PACKAGE,ACTUATOR OF PART NO.52746-***39 SHOULD BE LOCKED
RE DETAILED DIMENSIONS,SEE SD-52746-025

2. 梱包数量：1000個/リール
NUMBER OF CONNECTORS:1000PCS/REEL

3. リードテープ長さ LEAD TAPE LENGTH

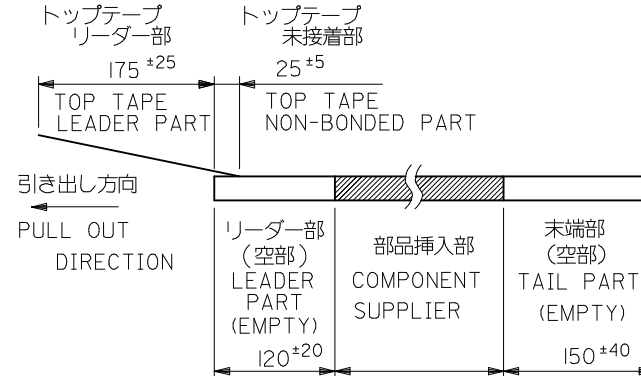

4. トップテープの剥離強度：(剥離方向は下図参照)

0.1N ~ 1.3N { 10gf ~ 130gf }

尚、本規格値は、出荷時に適用。

(但し、輸送時に剥離が発生しない事。)




PEELING OFF FORCE OF TOP TAPE

0.1N ~ 1.3N { 10gf ~ 130gf } (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)

THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT

PEEL OFF SHOULD NOT BE ALLOWED,

DURING TRANSPORTATION

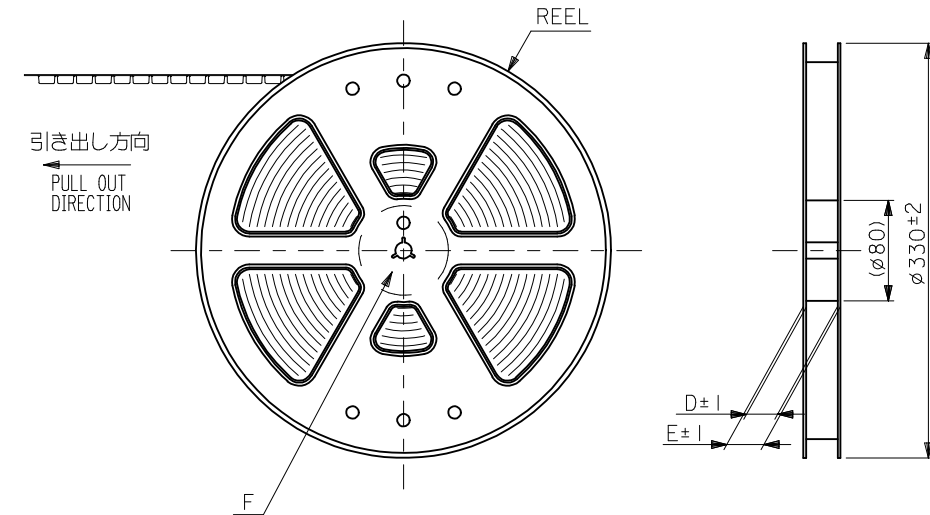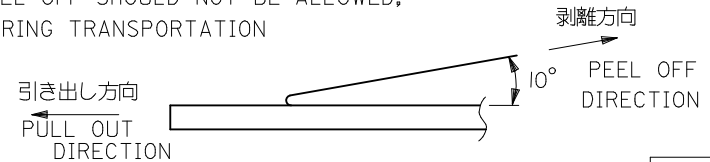

5. 材料
キャリアテープ:ポリプロピレン (PP)
トップテープ:PET, PE, PEF
リール:ポリスチレン (PS) <リサイクル材を含む>

MATERIAL CARRIER TAPE:POLYPROPYLENE
TOP TAPE:PET,PE,PEF
REEL:POLYSTYRENE(PS)
<RECYCLE MATERIAL CONTAINED>

6. 本製品は 52746-***81 の鉛フリー品です

THIS PRODUCT IS LEAD FREE OF 52746-***81

7. 本製品は乾燥剤入り、ハイバリア梱包仕様である。

THIS PRODUCT IS HIGH BARRIER PACKAGE WITH DESICCANT.

MODEL No.52746-***71

REVISED	EC NO.: J2009-2061 DRWN:TKN CHKD:HMATSUMOTO APPR:NUKITA	2009/05/20 2009/05/21 2009/05/21	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				10 UNDER	±0.2	DRAWN BY HSHIMABUKURO	DATE '04/01/30	TITLE 0.5 FPC CONN ZIF SMT RA B/CONT EMBSTP PKG -LEAD FREE-				
				10 OVER 30 UNDER	±0.25	CHECKED BY KTOJO	DATE '04/01/30					
				30 OVER	±0.3	APPROVED BY MSASAO	DATE '04/01/30	MOLEX INCORPORATED				
				ANGULAR	±3 °	MATERIAL NO. SEE SHEET 2.3						
			REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

F


E

D


C

B


A

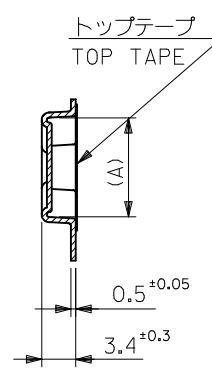


SECT.V-V

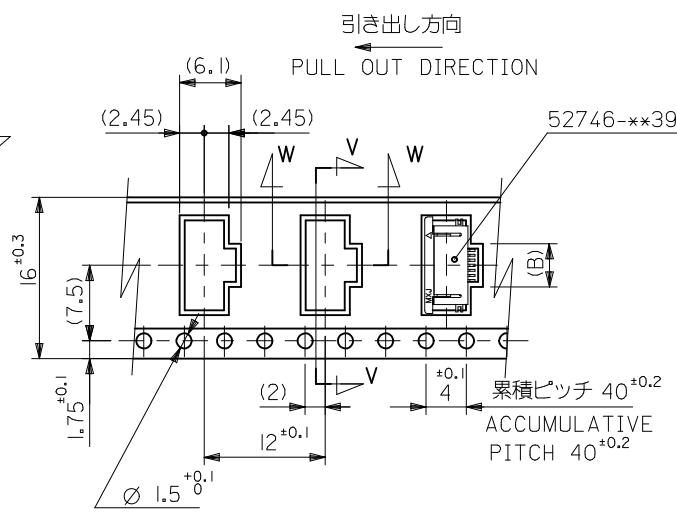


16mm幅キャリアテープ
16mm WIDTH CARRIER TAPE

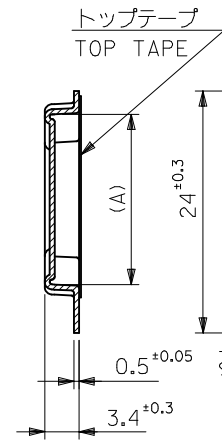


SECT.Y-Y

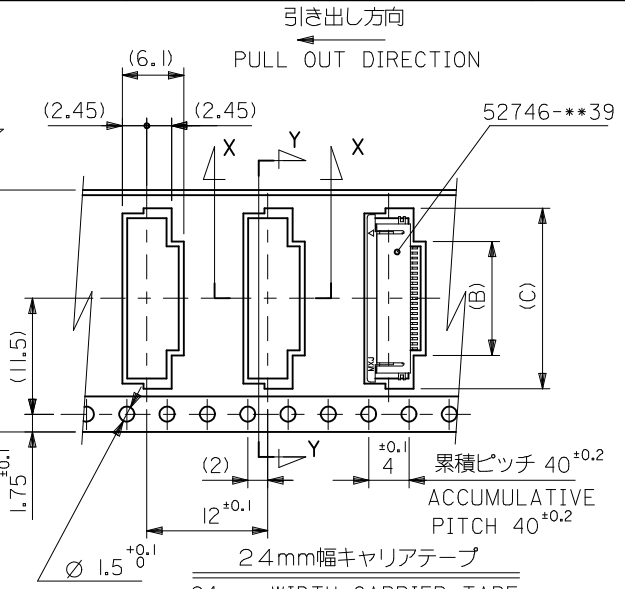

24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

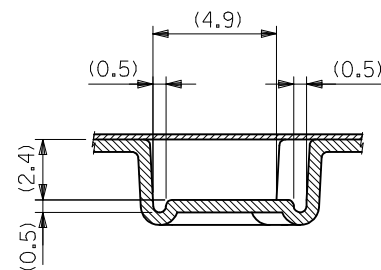



SECT. W-W

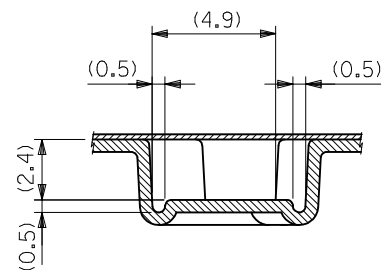

SECT.X-X

MODEL No.52746-***71

REVISED EC NO: J2009-2061 DRWN:TKN CHKD:HMATSUMOTO APPR:NUKITA	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY HSHIMABUKURO	DATE '04/01/30	TITLE 0.5 FPC CONN ZIF SMT RA B/CONT EMBSTP PKG -LEAD FREE- MOLEX INCORPORATED				
		10 OVER 30 UNDER	±0.25	CHECKED BY KTOJO	DATE '04/01/30					
		30 OVER	±0.3	APPROVED BY MSASAO	DATE '04/01/30					
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-52746-024		2 OF 3		
		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						



MODEL No.52746-xx71

tb_frame_A3_J_ME_S
Rev. E 2006/04/15

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F



E

D


C

B

A

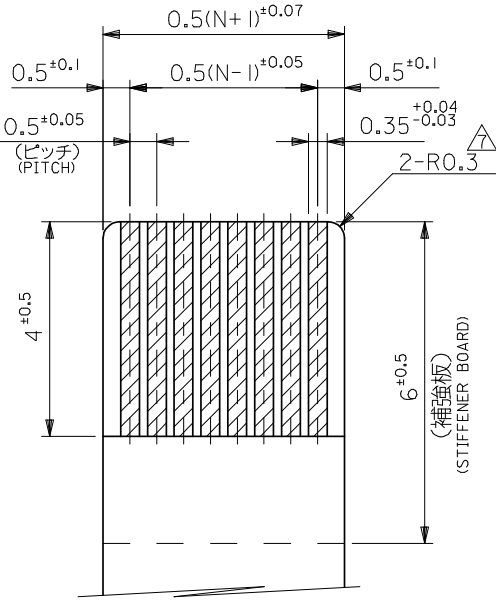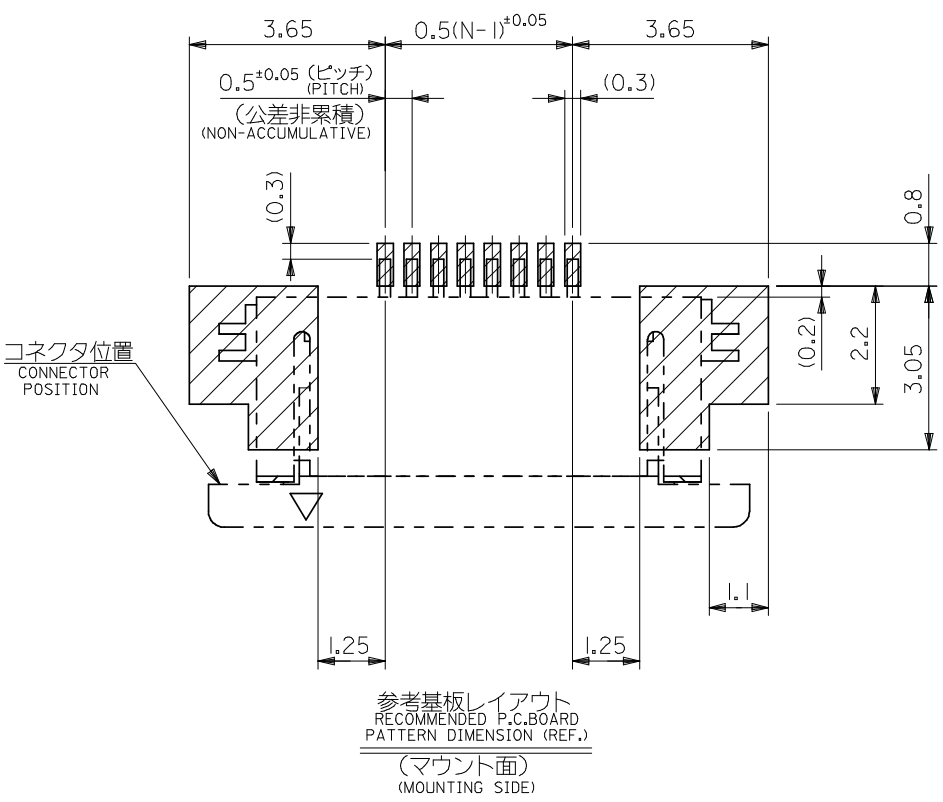

適合FPC推奨寸法
APPLICABLE FPC
RECOMMENDED DIMENSION
(仕上がり厚さ: 0.3±0.03)
(THICKNESS: 0.3±0.03)

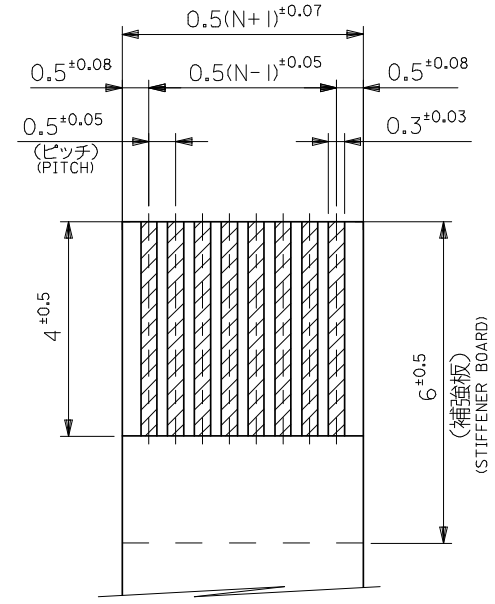

適合FFC推奨寸法
APPLICABLE FFC
RECOMMENDED DIMENSION
(仕上がり厚さ: 0.3±0.03)
(THICKNESS: 0.3±0.03)

FPCについて:
打抜き方向は導体側から補強板を推奨致します。
補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。

ABOUT FPC:
RECOMMENDED PUNCHER DIRECTION : FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED MATERIAL :
STIFFENER FILM : POLYIMIDE
BONDING AGENT : THERMOSETTING BONDING AGENT

注記 NOTES

△ R0.3は、FPCの導体側にかからないこと。
R0.3 MUST NOT BE OVERLAPPED TO PATTERN OF FPC.

REVISED EC NO: J2008-4308 DRWN:WABEI CHKD:THARUYAMA APPR:NUKITA		DESCRIPTION 2008/06/27 2008/06/30 2008/06/30	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	52746-**39	MODEL NO.			
							DESIGN UNITS METRIC		THIRD ANGLE PROJECTION			
			10 UNDER	±0.2	DRAWN BY HSHIMABUKURO	DATE '04/01/30	TITLE 0.5 FPC CONN ZIF FOR SMT R/A (BOTTOM CONTACT) -LEAD FREE-					
			10 OVER 30 UNDER	±0.25	CHECKED BY KTOJO	DATE '04/01/30						
			30 OVER	±0.3	APPROVED BY MSASAO	DATE '04/01/30						
			ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-52746-025		2 OF 2			
		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									