

# Plug Fuses

## Time-Delay

### 125 Volts, 15-30 Amps

# Type SL



CATALOG SYMBOL: SL  
 TIME-DELAY  
 15 TO 30A  
 125VAC OR LESS  
 U.L. LISTED  
 (GUIDE #JEFV, FILE # E12112)

**Electrical Ratings (Catalog Symbol and Amperes)**  
**125 Volts**


SL-15	SL-20	SL-25	SL-30
-------	-------	-------	-------

**Package Quantity and Weight**

Ampere Ratings	Quantity		Weight	
	Box	Card	Per Box	Per 5 Cards
15, 20, 25, & 30A	4	3	0.200	0.995

- **Size Rejecting Plug Fuse.**
- No-interchangeability prevents installing a higher amp fuse than the circuit was designed for.
- Has ability to withstand typical motor starting surges.
- Use in residential or light-duty motor circuits.
- These fuses thread into SA adaptors.

**Time-Current Characteristics—Total Clear**

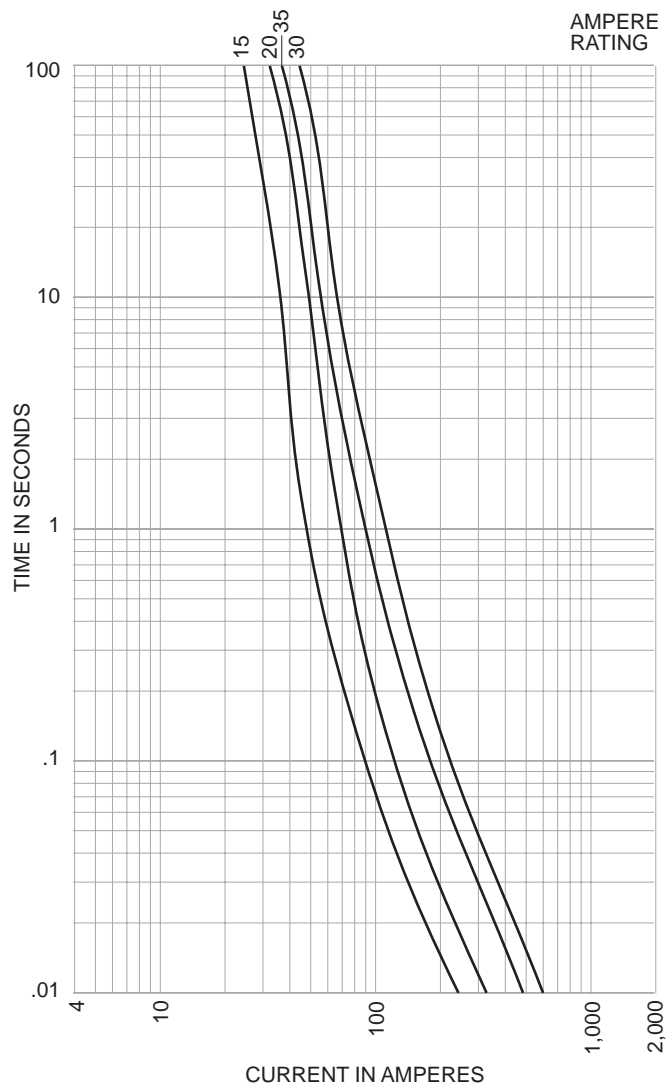

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.