

4

3

2



1

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			R	REVISED PER ECO-13-001939	08NOV2013	KH	MB


MATERIAL:
HOUSING: POLYAMIDE 6, UL94V-2,
COLOR OFF WHITE.
CONTACT: BRASS, TIN PLATED.
WIRE PROTECTOR: STAINLESS STEEL.
SCREW: M5, STEEL, ZINC PLATED W/ NON-
HEXAVALENT CHROMATE (CHROME III).
WIRE PROTECTOR: STAINLESS STEEL.

ELECTRICAL:
MAX CURRENT: 65A (UR) 70A (CSA)
OPERATING VOLTAGE: 600V PER UL FILE E60677
WIRE RANGE: 6-14 AWG (UR) 6-22 AWG (CSA)
DIELECTRIC WITHSTAND: 6000V.

ENVIRONMENT:
CONTINUOUS WORKING TEMP.: -35°C TO 100°C.

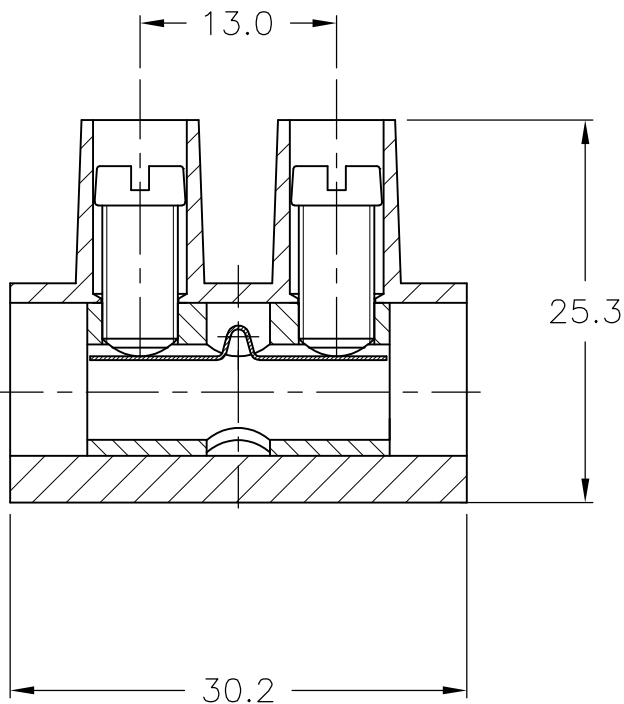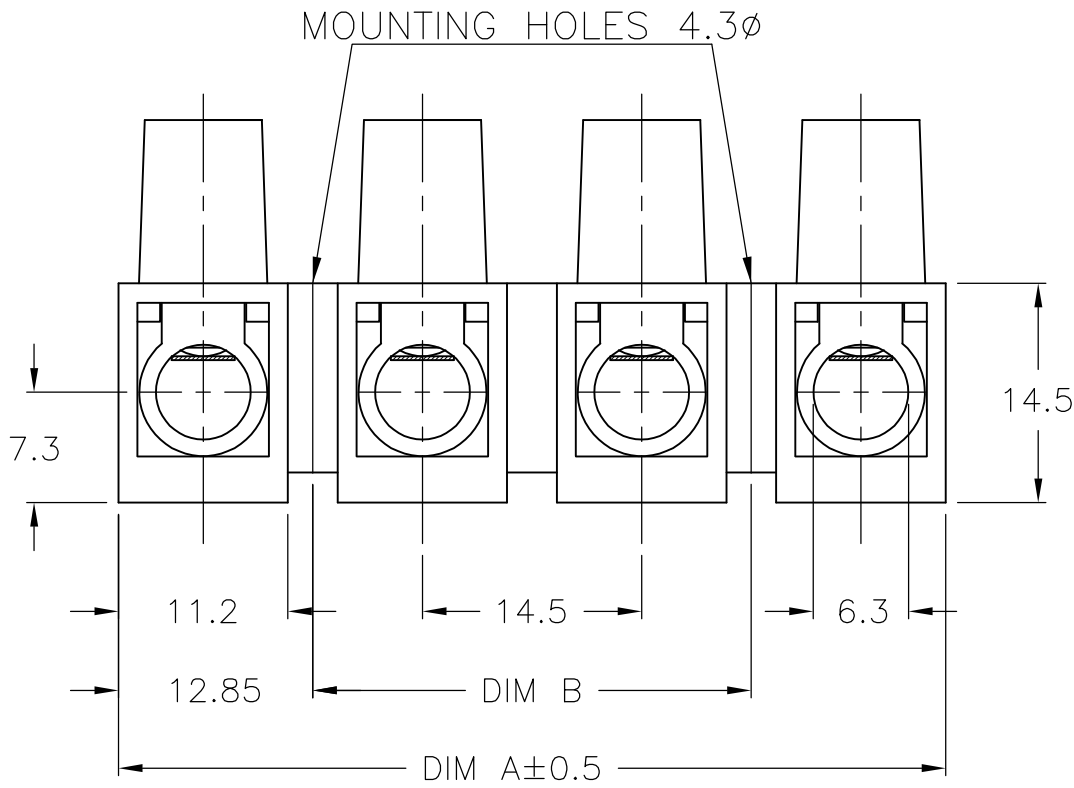

145	170.7	12	TSB200012DS	1-1776313-2
130.5	156.2	11	TSB200011DS	1-1776313-1
116	141.7	10	TSB200010DS	1-1776313-0
101.5	127.2	9	TSB200009DS	1776313-9
87	112.7	8	TSB200008DS	1776313-8
72.5	98.2	7	TSB200007DS	1776313-7
58	83.7	6	TSB200006DS	1776313-6
43.5	69.2	5	TSB200005DS	1776313-5
29	54.7	4	TSB200004DS	1776313-4
14.5	40.2	3	TSB200003DS	1776313-3
—	25.7	2	TSB200002DS	1776313-2
—	11.2	1	TSB200001DS	1776313-1
DIM B	DIM A	NO OF POS	CATALOG NUMBER	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 3/21/05	 TE Connectivity				
		CHK C RICHARD 3/21/05					
DIMENSIONS: mm		APVD C RICHARD 3/21/05	NAME				
		PRODUCT SPEC —	14.5MM PITCH WITH WIRE PROTECTOR				
		APPLICATION SPEC —					
		WEIGHT —					
		CUSTOMER DRAWING					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± 0.3 2 PLC ± 0.25 3 PLC ± — 4 PLC ± — ANGLES ± 2'		SIZE A3			CAGE CODE 00779	DRAWING NO C-1776313	RESTRICTED TO —
MATERIAL —		FINISH —		SCALE NTS		SHEET 1 OF 1	REV R